



Product Features

- 1, Constant current output
- 2, High Quality of light
- 3, High Reliability
- 4, Low Output Current Ripple
- 5, Isolated
- 6, Internal usage
- 7, DIP Switch 250/300/350/400mA
- 8, Input voltage 380Vac protection

1) Compliances and Approvals

Approvals	CE EAC
Built-in/independent	Built in
Ingress protection	IP20
Suitable for fixture of protection Class	Class I
Output Safety Level	Isolated
Enviromental	Indoor
Features	Fixed

2) Electric Input Characteristics

	Symbol	Remarks	Min.	Typical	Max.	Unit
Input Voltage						
Rated mains voltage	Vin	Nominal range	220	-	240	Vac
Mains voltage range	Vin.op	operational	195	-	264	Vac
Mains frequency nominal	fn	Nominal range	50		60	Hz
Rated mains voltage	Vin	Nominal range	195	-	264	Vdc
Starting time		@230Vac, full load			500	ms
Input Current						
Input current	lin	@230Vac, full load		0.16		A
Input inrush current		@230Vac, 50% width		14.8A,284us		A, us
Power Factor	PF	@230Vac, full load	0.95			
Total Harmonic distortion	THD	@230Vac, full load			10	%
System Efficiency	η	@230Vac, full load		88		%
Input Power						
Input Power	Pin	@230Vac, full load			33	W
Input Power@ open load		rated input voltage			0.5	W
Input Power@ standby		rated input voltage		NA		
Dimming						
Dimming type				DIP SWITCH		

3) Electric Output Characteristics

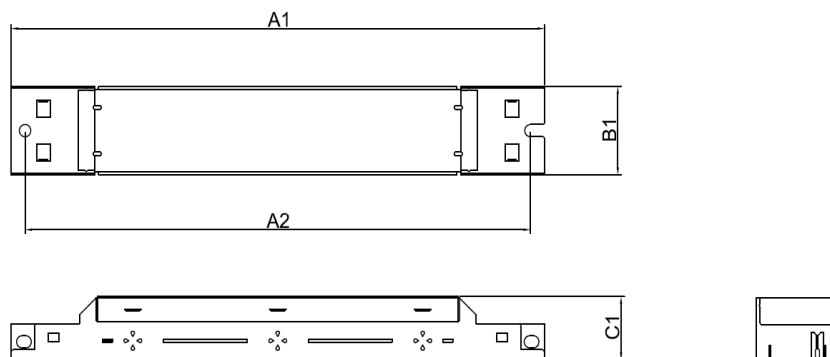
Output Voltage																									
Output voltage range	Vo	measured at end of wire	45	80	Vdc																				
Output voltage @no load	Vo.max	open load	150		Vdc																				
Output Current																									
Output Current	Io		250/300/350/400		mA																				
Default Setting Current	Io		400		mA																				
DIP when power on is NOT allowed, please disconnect the AC power before DIP																									
<table><tr><td>PIN1</td><td>PIN2</td><td>U out</td><td>I out</td></tr><tr><td>OFF</td><td>OFF</td><td>45-80V</td><td>250mA</td></tr><tr><td>ON</td><td>OFF</td><td>45-80V</td><td>300mA</td></tr><tr><td>OFF</td><td>ON</td><td>45-80V</td><td>350mA</td></tr><tr><td>ON</td><td>ON</td><td>50-75V</td><td>400mA</td></tr></table>						PIN1	PIN2	U out	I out	OFF	OFF	45-80V	250mA	ON	OFF	45-80V	300mA	OFF	ON	45-80V	350mA	ON	ON	50-75V	400mA
PIN1	PIN2	U out	I out																						
OFF	OFF	45-80V	250mA																						
ON	OFF	45-80V	300mA																						
OFF	ON	45-80V	350mA																						
ON	ON	50-75V	400mA																						
Output Current tolerance			-7.5	7.5	%																				
Current Ripple		@230Vac (Imax-Imin)/(Imax+Imin)	1		%																				
Output Power																									
	Po	output performance power		30	W																				
Isolation																									
	In-Out	3000Vac. for 1min		10	mA																				

4) Robustness	Symbol	Remarks	Min.	Typical	Max.	Unit
General						
Electric strength	Input-Output	50Hz/60Hz and be applied for 1 min		3000		Vrms
	Input-GND			1480		Vrms
Insulation Resistance Test		500Vd.c. for 1min, For SELV part is 100 Vd.c.	2			MΩ
Reliability						
Rated Life@Tc.max		10% failure			50K	Hrs
Rated Life@Tc.life		10% failure			100K	Hrs
Surge	L-N			1		kV
Surge	L/N-PE			2		kV
Environment Operation						
Ambient temperature	Ta		-40		45	°C
Maximum Tcase	Tc.max				80	°C
Tc life	Tc.life				70	°C
Operation Humidity	H.op		10		90	%
Environment Storage						
Storage temperature	T.st		-25		85	°C
Storage Humidity	H.st		10		90	%
Abnormal Condition						
Input Over Voltage		Protected, no damage to driver ^①		380		Vac
Output Short Circuit		Protected, no damage to driver ^②		With		
Output Open load		Output voltage limited to Vo.max ^③		125		Vdc
Too High Ambient Temperature		Protected by built-in thermal protection in controller IC ^④		With		
Input Over Power		Input power should be limited and no damage to driver ^⑤			33	W
① If the LED driver connects to Input Voltage 380Vac, then the protection Turn On and the Led driver is switched off until its connect to Input voltage 220-240Vac. In this protection mode, the led driver does not blink and can be not damage more than 48 hours ② Auto Recovery ③ Auto Recovery ④ The output current decreases ⑤ There is risk to damage the LED driver or decreases the life time.						

5) Warranty

- Warrenty 5 years
- Except for the following circumstance:
 - 1) Improper Installation or operation
 - 2) Misuse
 - 3) Abuse
 - 4) Unauthorized or improper repair alteration
 - 5) Accident or negligence in use, storage, transportation.
 - 6) Any natural destroy
 - 7) Exceed the specifiaction as per the product datasheet

6) Mechanical properties	Symbol	Remarks	Unit
Dimensions		L W H M	
		195(A1) 30(B1) 21.5(C1) 184.8(A2)	mm
Housing Material		Metal	



7) Physical properties	Symbol	Remarks	Unit
Weight		130	gram
Qty to Carton		100	pcs
Carton Size:		31*20.5*27	cm
G.W:		13.5	kgs
Potting Raw materials		without	
Printing		printing can be changed by customer's email confirmation	

size:127*26mm

INPUT LED Driver PL-HMI-030WA0400C-380V 220-240Vac 50/60Hz	OSSDAT		OUTPUT 																			
	Pin 33W PF 0.95 Iout 400mA Ta -40...45°C	lin 0.16A Umax 150V Uout 50-75V Tc 80°C	9-10mm 0.5-0.75 Cable Tc Made in China <table border="1"> <tr> <th>PIN1</th><th>PIN2</th><th>U out</th><th>I out</th></tr> <tr> <td>OFF</td><td>OFF</td><td>45-80V</td><td>250mA</td></tr> <tr> <td>ON</td><td>OFF</td><td>45-80V</td><td>300mA</td></tr> <tr> <td>OFF</td><td>ON</td><td>45-80V</td><td>350mA</td></tr> <tr> <td>ON</td><td>ON</td><td>50-75V</td><td>400mA</td></tr> </table>	PIN1	PIN2	U out	I out	OFF	OFF	45-80V	250mA	ON	OFF	45-80V	300mA	OFF	ON	45-80V	350mA	ON	ON	50-75V
PIN1	PIN2	U out	I out																			
OFF	OFF	45-80V	250mA																			
ON	OFF	45-80V	300mA																			
OFF	ON	45-80V	350mA																			
ON	ON	50-75V	400mA																			

Connection	Signal	Cable Description	Remark
Input	L	0.5-0.75mm ²	grey, push-in terminal
	N	0.5-0.75mm ²	grey, push-in terminal
	G	0.5-0.75mm ²	grey, push-in terminal
Output	+	0.5-0.75mm ²	red, push-in terminal
	-	0.5-0.75mm ²	black, push-in terminal
Connection Marking	Yes		

8) Directives / Test Standards
Directives / Test Standards
Safety

IEC61347-1、IEC61347-2-13

EMC

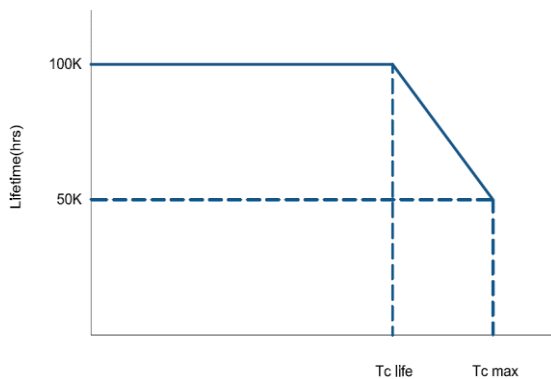
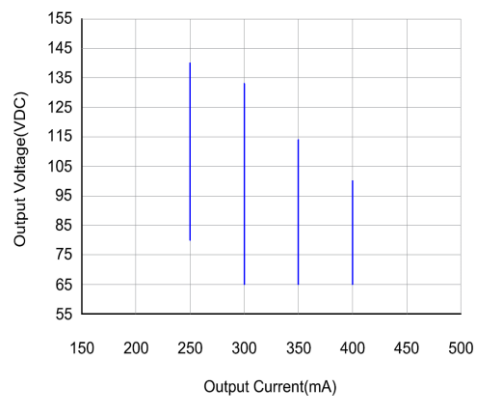
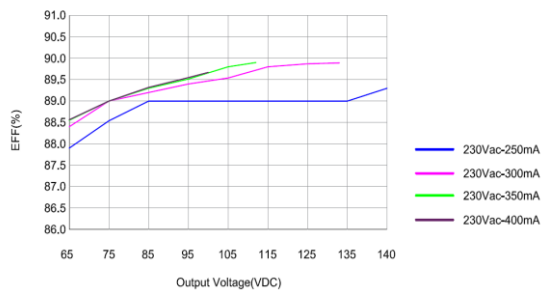
 EN55015、CISPR15、EN61000-3-2、EN61547、EN61000-4-2、EN61000-4-3、EN61000-4-4、
EN61000-4-5、EN61000-4-6、EN61000-4-11

9) Addition Remarks

- The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. The manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.

- The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Operating conditions of the LED drivers may never exceed the specifications as per the product datasheet.

- All parameters, if not specified, are measured at 230Vac full loading and 25°C ambient temperature

10) Performance
Lifetime vs. Temperature Curve

Operating window

Efficiency VS. Load

Power Factor Characteristics
