
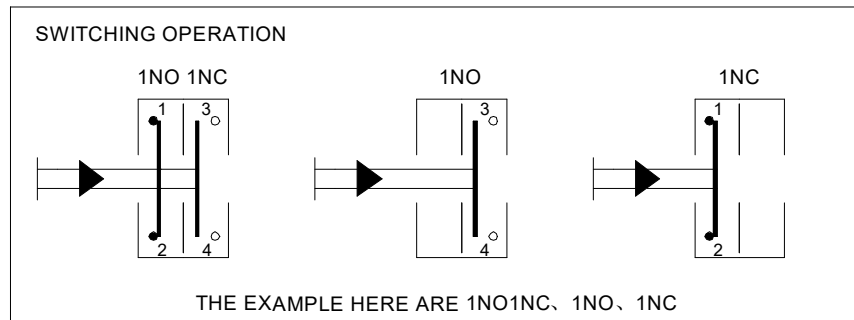


FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

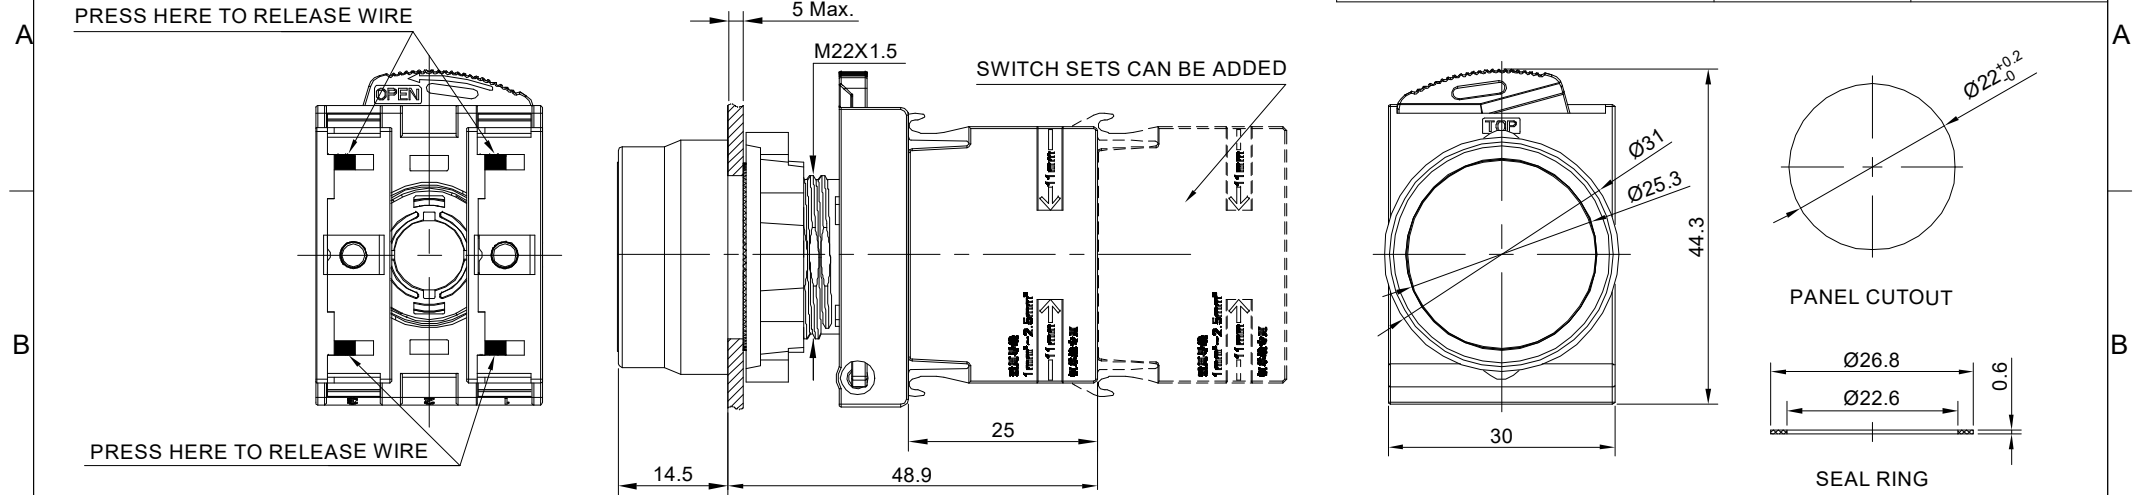

SPECIFICATIONS:

1. SWITCH RATING: Ui:500V, Ith:10A.
2. MECHANICAL LIFE: $\geq 1,000,000$ cycles(MOMENTARY),
 $\geq 500,000$ cycles(LATCHING).
3. ELECTRICAL LIFE: $\geq 50,000$ cycles.
4. CONTACT RESISTANCE: $\leq 200\text{m}\Omega$.
5. INSULATION RESISTANCE: $\geq 1000\text{M}\Omega(500\text{VDC})$.
6. POWER-FREQUENCY WITHSTAND VOLTAGE: 3,000V, RMS 50Hz, 1min.
7. OPERATING TEMPERATURE: $-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$ (NO FREEZING, KEEP THE AIR FLOWING AROUND PUSHBUTTON).
8. TORQUE: ABOUT $0.6\text{N}\cdot\text{m}$ APPLIED TO NUT.
9. OPERATING FORCE: ABOUT $6.5\text{N}(1\text{NO}1\text{NC})$, ABOUT $11.5\text{N}(2\text{NO}2\text{NC})$.
10. OPERATING TRAVEL: ABOUT 5.5mm.
11. FRONT PANEL PROTECTION DEGREE: IP40/IP65.
12. TERMINAL TYPE: WIRE CONNECTION, DIAMETER: $1\text{mm}^2 \sim 2.5\text{mm}^2$.
13. GENERAL TOLERANCE: $0-18\text{mm} = \pm 0.25$, $18-80\text{mm} = \pm 0.52$.
14. COMPLIANT WITH RoHS.

MATERIALS:

- 1.CONTACT: SILVER ALLOY.
- 2.BUTTON: PC.
- 3.BODY: PA.
- 4.BASE: PA.

PART NUMBER:ONPOW26BK-Q□■/△/※

"□"	CONTACT STRUCTURE	"△"	BUTTON COLOR
11	1NO1NC	R	RED
10	1NO	G	GREEN
01	1NC	Y	YELLOW
20	2NO	B	BLUE
02	2NC	W	WHITE
THE COMBINATION MODE CAN BE SELECTED ACCORDING TO THE NEEDS.		N	BLACK
"■"	OPERATION MODE	"※"	PROTECTION DEGREE
NO LETTER	MOMENTARY	NO LETTER	IP40
Z	LATCHING	P	IP65

BRAND 品牌		红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.				
ONPOW 欧宝龙®						
TITLE 名称		ONPOW26 SERIES PUSHBUTTON SWITCHES			UNIT 单位	mm
DWG NO. 图号		ONPOW26BK-Q(不带灯)	SCALE 比例 1 : 1		SIZE 图纸	A4
FILE NAME 档案名称		ONPOW26BK-Q.DWG	DRAWN 制图 LJJ 2026/05/28		SHEET 张 1/1	REV. 版本 V1.0