

F

E

D

C

B

A

U9

1

2

3

4








5

6

7

8

9

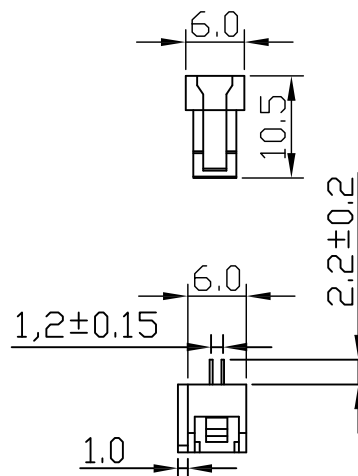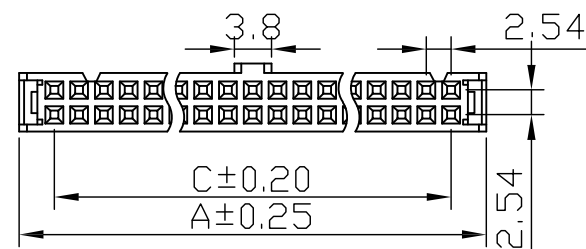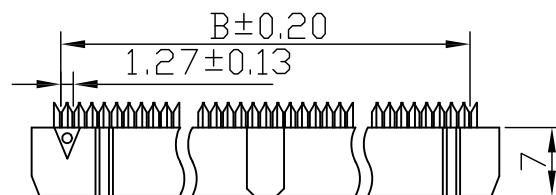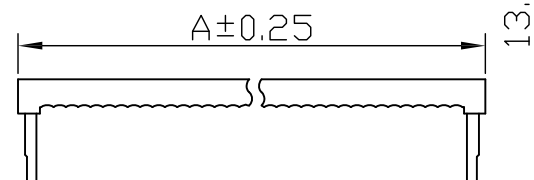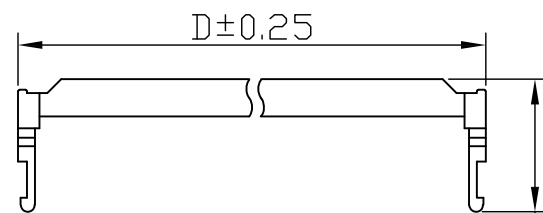

SINGLE CONTACT TYPE

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2022.02.07	钟建虾
B		增加电镀码	2023.02.17	钟建虾

SPECIFICATIONS

Rated Current: 1Amp

Contact Resistance: 20mΩ Max

Withstand Voltage: AC 500V for 1Minute

Insulation Resistance: 100MΩ Min at DC 500V

Operation Temperature: -40°C to +105°C

Contact Material: Brass

Contact Plating: Please See Part Numnber

Insulator Material: PBT UL94V-0

All materials must meet GREENCONN hazardous substances control standards.

TABLE:

No of Pins/Row	Dim. A	Dim. B	Dim. C	Dim. D
04	14.86	8.89	7.62	14.66
05	17.40	11.43	10.16	17.20
06	19.94	13.97	12.70	19.74
07	22.48	16.51	15.24	22.28
08	25.02	19.05	17.78	24.82
09	27.56	21.59	20.32	27.36
10	30.10	24.13	22.86	29.90
12	35.18	29.21	27.94	34.98
13	37.72	31.75	30.48	37.52
14	40.26	34.29	33.02	40.06
15	42.80	36.83	35.56	42.60
17	47.88	41.91	40.64	47.68
18	50.42	44.45	43.18	50.22
20	55.50	49.53	48.26	55.30
22	60.58	54.61	53.34	60.38
25	68.20	62.23	60.96	68.40
30	80.90	74.93	73.66	80.70
32	85.98	80.01	78.74	85.78

Ordering Information

C QHZ204 - XX XX A 001 A X B X

No. of Pins per Row
SEE TABLE

Standard Plating
70=Gold Flash/Ni
Selective Plating
 S8=Gold 30u"/Ni

Color
1=Black


Standard Packing
B=Tray



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. B UNIT. mm SCALE. 1:1

3RD. ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.°±5.0°	X.±0.35
.X°±3.0°	.X±0.30
.XX°±2.0°	.XX±0.25
.XXX°±1.0°	.XXX±0.15

DESIGNED: 钟建虾

DATE: 2023.02.17

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CQHZ204-CA001AB

PART NO.

CQHZ204-XXXXA001AXBX

TITLE.

IDC 2.54 三件式