
REV	DESCRPTION	DATE
A	Original Edition	2008-10-07

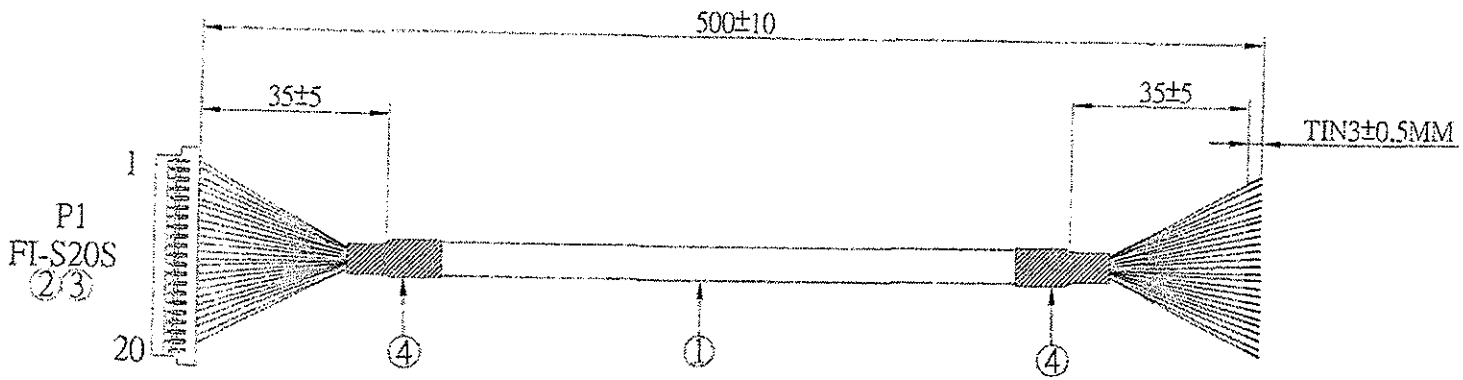

PINOUT

P1
FI-S20S

TWIST	1	PINK/BLACK	TIN
	2	PINK	TIN
TWIST	3	WHITE/BLACK	TIN
	4	WHITE	TIN
	5	PURPLE/BLACK	TIN
TWIST	6	GRAY/BLACK	TIN
	7	GRAY	TIN
	8	PURPLE	TIN
TWIST	9	BLUE/BLACK	TIN
	10	BLUE	TIN
	11	YELLOW/BLACK	TIN
TWIST	12	GREEN/BLACK	TIN
	13	GREEN	TIN
	14	YELLOW	TIN
TWIST	15	ORANGE/BLACK	TIN
	16	ORANGE	TIN
TWIST	17	RED/BLACK	TIN
	18	RED	TIN
TWIST	19	BROWN/BLACK	TIN
	20	BROWN	TIN

TEST THE CONDITION
100% TEST SHORT、OPEN、MISSWIRE
INSULATION RESISTANCE: 20MΩ MIN
CONTACT RESISTANCE: 1Ω MAX
WITHSTAND VOLTAGE: 300V DC

ITEM	DESCRIPTION	Q'TY	REMARK
④	TUBE:Ø6.0*L20MM BLACK	2PCS	TUBE
③	JAE/FI-C3-A1-15000 (or EQ)	20PCS	TERMINAL
②	JAE/FI-S20S (PH1.25)(or EQ)	1PCS	HOUSING
①	UL20276 #28AWG*10PR+AB BEIGE OD5.2 L507MM	1PCS	CABLE

Customer: E001	Title:FI-S20S-TIN3MM-L500MM		Part Number :FI-S20S-0500RK		DWG NO:YR081007-J00		
APPROVED		CHECK		DRAWN	JLB	REV A	SHEET:1/1 UNIT
						DATE 2008-10-07	SCALE:NONE