

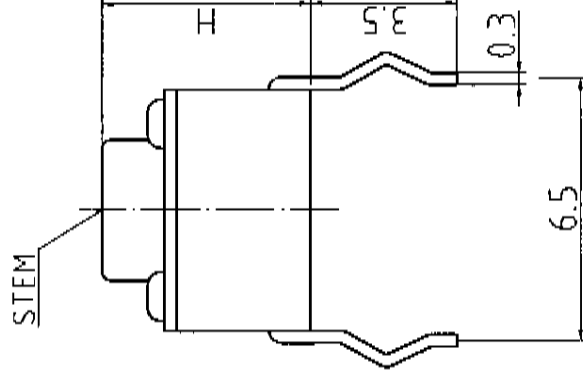


HOW TO ORDER


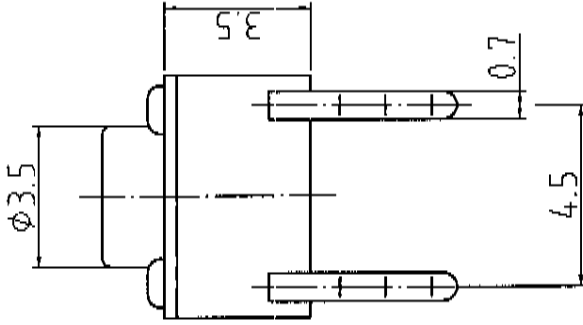


TS21(H)

STEM HEIGHT (mm)	
040	4
043	4.3
045	4.5
047	4.7
050	5
055	5.5
060	6
065	6.5
070	7
075	7.5
078	7.8
080	8
095	9.5
100	10
107	10.7
110	11
115	11.5
120	12
125	12.5
130	13
140	14
150	15
160	16
170	17
180	18
220	22



Circuit Diagram

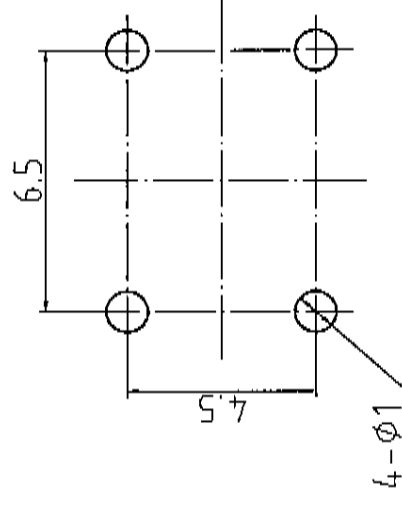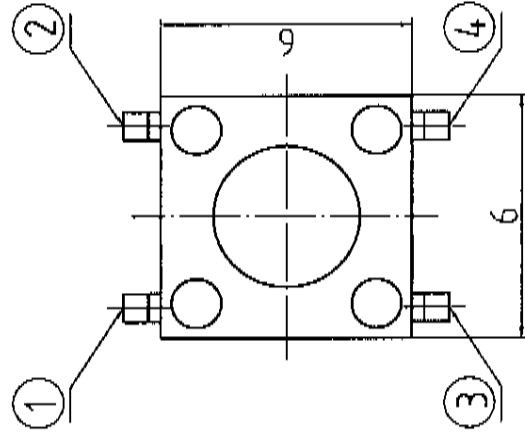

SPECIFICATION:

Rating: DC12V 50mA
 Contact Resistance: 100m ohm max
 Insulation Resistance: 100M ohm min
 Operation Force: 160±30gf / 250±30gf
 Life: 100,000cycles








DWN: Z.L.Y. UNIT: mm

CHKD: W.Y. DATE: PAGE:

APVD: C.S.C. SCALE: TITLE: TACT SWITCH

PART NO: TS21

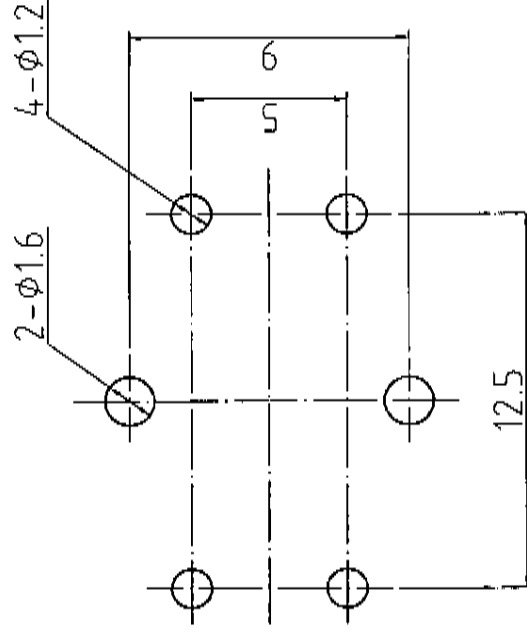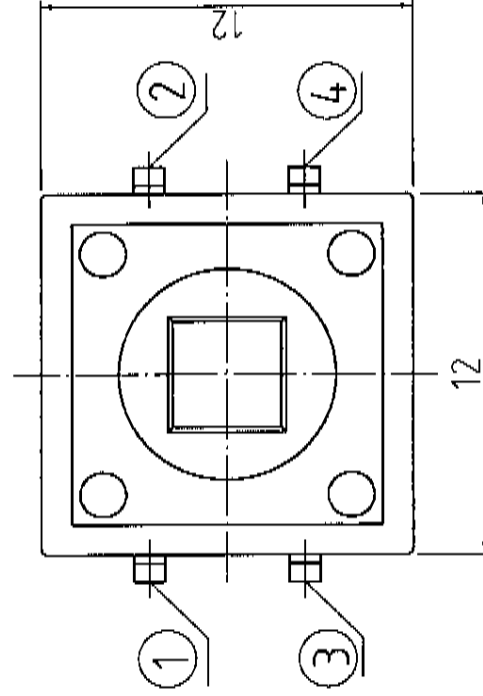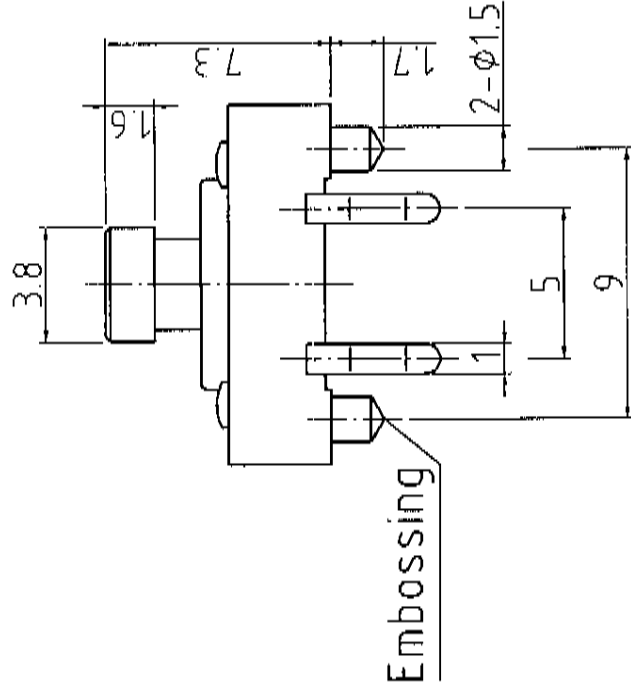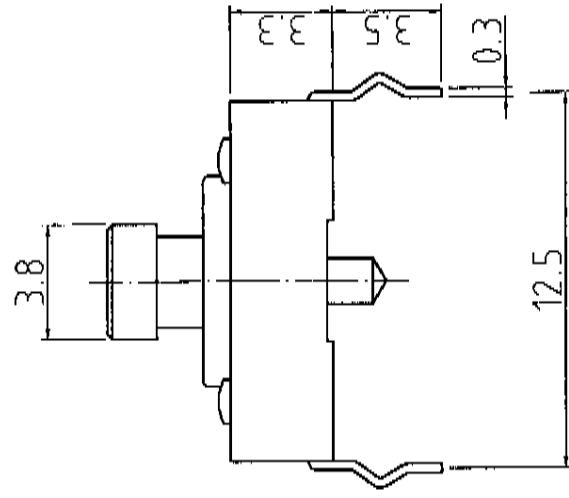

Circuit Diagram

ORDERING INFORMATION

TS33073

C	EMBOSSING
D	
E	
W	WITH
N	WITHOUT

SPECIFICATION:

Rating: DC12V 50mA
 Contact Resistance: 100m ohm max
 Insulation Resistance: 100M ohm min
 Operation Force: 160±30gf
 Life: 100,000cycles



DWN Z.L.Y.

CHKD: W.Y.

APVD: C.S.C.



UNIT: cm

SCALE:

DATE:

PAGE:

TITLE: TACT SWITCH

PART NO: TS33073