



Ver.	Modify No.	Details	Area	P.I.C	Date


Front View

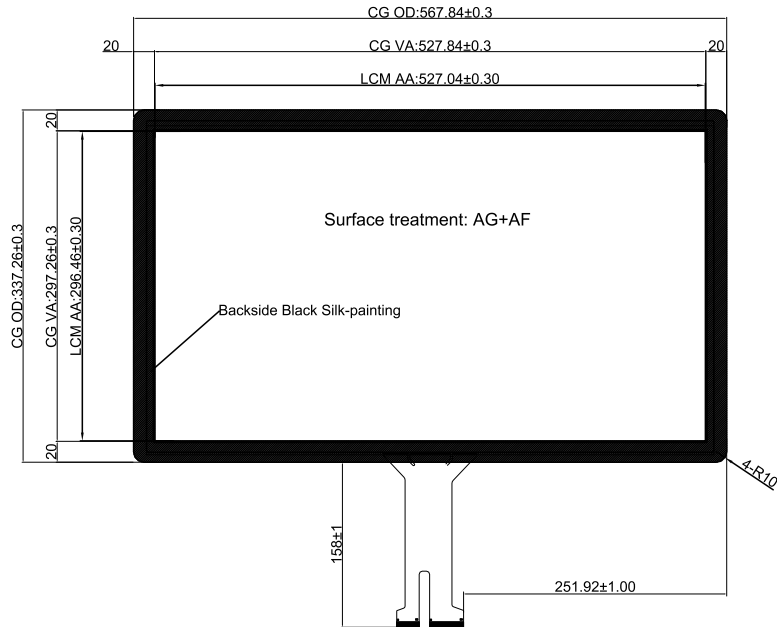

Side View

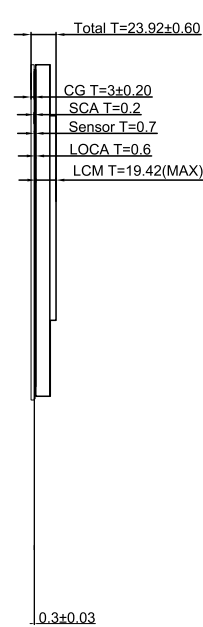


Back View

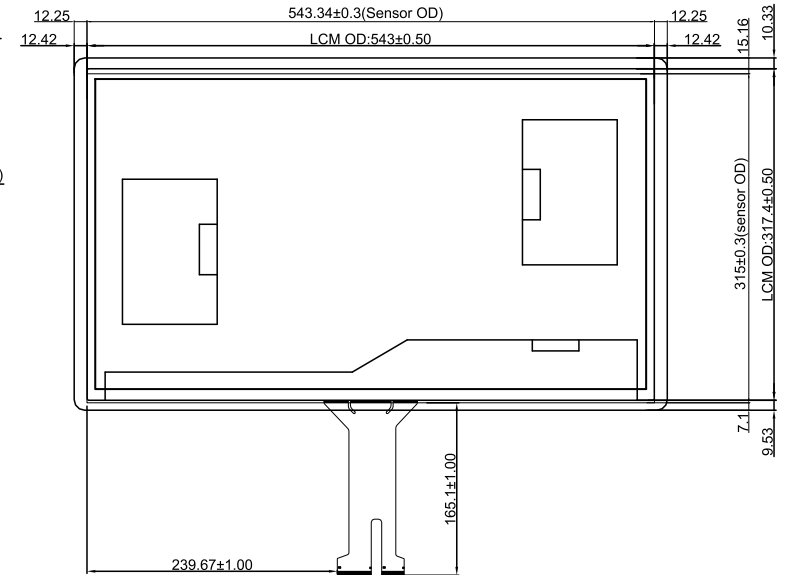

Technical Datasheet:

1. Structure: TP+LCM Optical Bonding
2. Cover Glass: 3mm Tempered Glass
Surface treatment: AG+AF
3. LCD: G238HCJ-LH1
4. TP Controller: BTP-TPM-CTR-ILI-238B-SN16 COB
5. TP Controller IC: ILI2510
6. Surface Hardness: ≥6H
7. Light Transmittance: ≥80%
8. Working Temperature: -20℃~+70℃, ≤85%RH;
9. Storage Temperature: -30℃~+80℃, ≤85%RH;
10. Unmarked Tolerance: ±0.5mm
11. All materials used conform to RoHS standards



Designed by:	Curry.Wang	Business Unit: SNT-BTP		Period Mark		View Angle	Ratio
Checked by:	Jimmy.Lu			A			1:1
Approved by:	Cale.Chen						
Workmanship:		BOM Code	2.03.238.01.0116		Page 1		Total 1 Page
Standardization:	Link.Chen	Product Series	BTP-TPM		 思诺泰科创电子（苏州）有限公司 SINOTRONICS INC.		
Released by:	Rocky.Liu						

E-File Name: PM238250602SN16

A3