



Ver.	modify NO.	Details	Area	P.I.C	Date

Front View

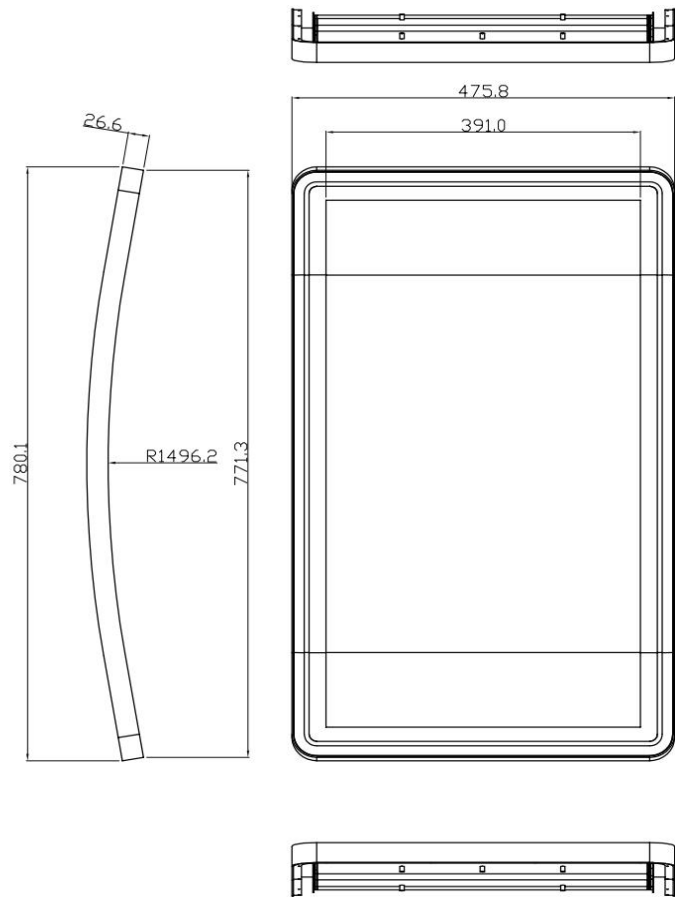

Back View

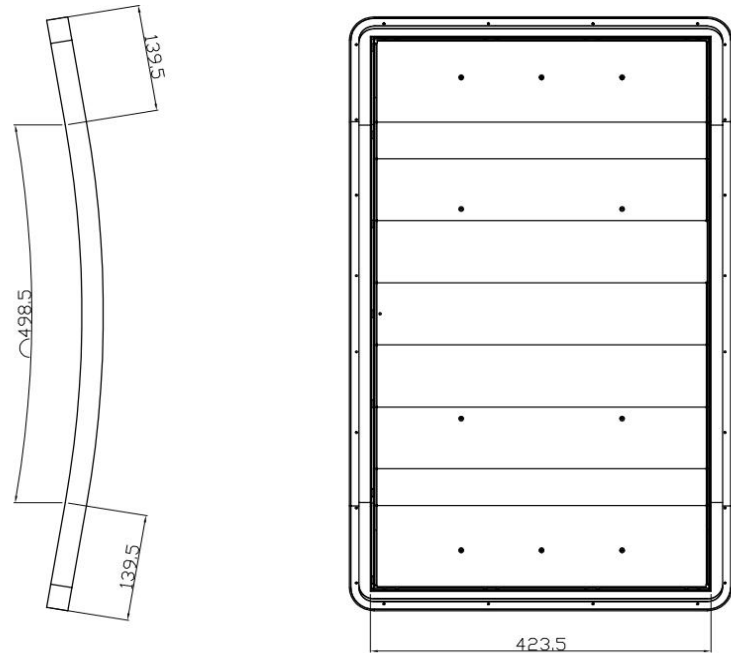

Technical Datasheet:
1. Structure: TP+LCM+Frame Bonding
2. Cover Glass: 3mm Tempered Glass
3. TP Controller: BTP-TMF-CTR-ILI-32C-SN01
4. Surface Hardness: ≥6H
5. Light Transmittance: ≥85%
6. Working Temperature: 0℃~+50℃, ≤85%RH;
7. Storage Temperature: -10℃~+60℃, ≤85%RH;
8. Unmarked Tolerance: ±0.5mm
9. All materials used conform to RoHS standards

Designed by:	Curry.Wang	Business Unit: SNT-BTP		Period Mark		View Angle	Ratio
Checked by:	Jimmy.Lu			A		1:1	
Approved by:	Cale.Chen						
Workmanship:		BOM Code		Page 1	Total 1 Page		
Standardization:	Link.Chen	Product Series	BTP-TMS	 SINOTELECTRONICS Interactivity Changes the World			
Released by:	Rocky.Liu						