


Ver.	Modify No.	Details	Area	P.I.C	Date

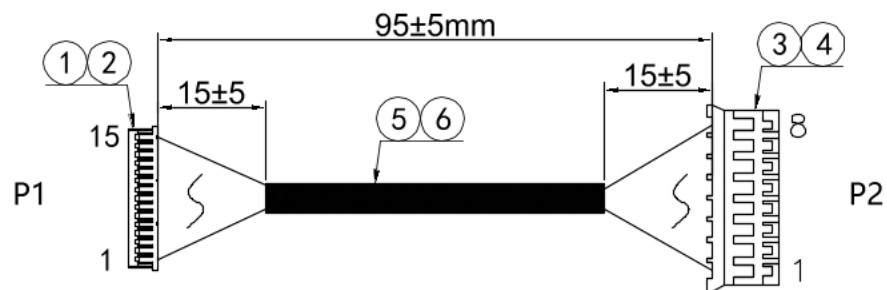

CHARACTERISTIC:

- (1).The cable shall be 100% electric test.
- (2).Operating voltage:110V DC max !
- (3).Insulation resistance: 10M ohm/MIN
- (4).Conductance resistance: 2 ohm/Max
- (5).Wire color cannot be changed at will.

PIN ASSIGNMENT

COLOR	P1	P2
Red	1	1
Black	2	2
Red	3	3
Red ☆	5	双压 3
Black ☆	4	双压 4
Black	6	4
Red	7	双压 5
Red ☆	9	5
Black ☆	8	双压 6
Black	10	6
Red	11	7
Black	12	8
	13	NC
	14	NC
	15	NC

NO.	NAME:	SPEC:	QTY	Remark
1	Housing	DF14-15P	1	
2	Terminal	DF14-T	12	
3	Housing	PHR-8P Pitch 2.0 (PH2.0-8P)	1	
4	Terminal	SPHD-002T-P0.5 (PH2.0-T)	8	
5	Wire	UL1571 28AWG OD=0.6		
6	Acetic acid tape	W15*L65MM (CB)	1	
All material used conform to RoHS standards				

Part No.		Power-DF14-15P-DF14-T-95 (685622.002)		
Product Name:		Period Mark	View Angle	Ratio
		A		1:1
Business Unit:		Page 1 Total 1 Page		
SNT-CKP		SINOTECHNICS 思诺泰科创 · 造未来 Interactivity Changes the World		
Product Series	CKP-Cable			