


iW-RainboW-G40M

i.MX 8M Plus Quad/QuadLite/Dual SMARC System On Module Hardware User Guide

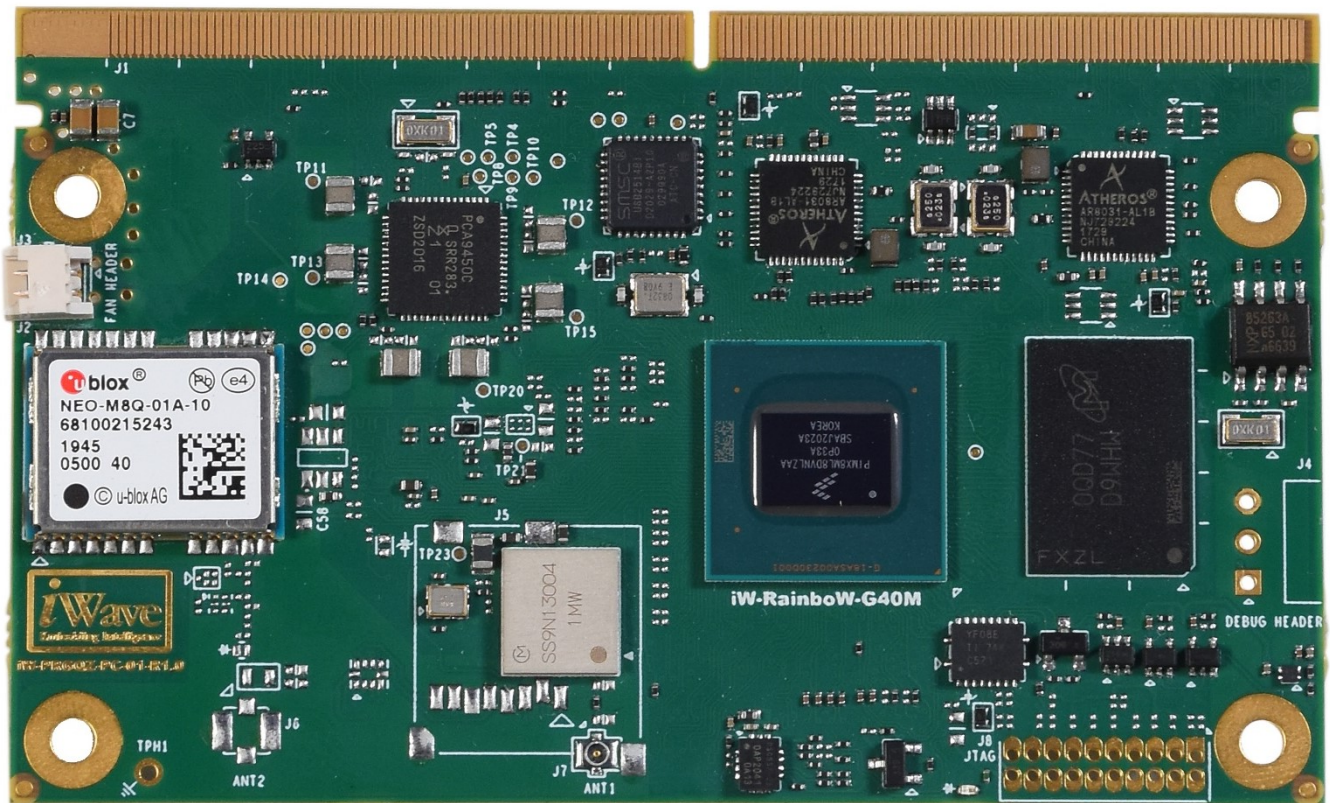

iWave
Embedding Intelligence

i.MX 8M Plus SMARC SOM Hardware User Guide

Document Revision History

Document Number		iW-PRGQZ-UM-01-R2.0-REL0.1-Hardware
Revision	Date	Description
0.1	24 th Aug 2021	Draft Release Version

PROPRIETARY NOTICE: This document contains proprietary material for the sole use of the intended recipient(s). Do not read this document if you are not the intended recipient. Any review, use, distribution or disclosure by others is strictly prohibited. If you are not the intended recipient (or authorized to receive for the recipient), you are hereby notified that any disclosure, copying distribution or use of any of the information contained within this document is STRICTLY PROHIBITED. Thank you. "iWave Systems Tech. Pvt. Ltd."

Disclaimer

iWave Systems reserves the right to change details in this publication including but not limited to any Product specification without notice.

No warranty of accuracy is given concerning the contents of the information contained in this publication. To the extent permitted by law no liability (including liability to any person by reason of negligence) will be accepted by iWave Systems, its subsidiaries or employees for any direct or indirect loss or damage caused by omissions from or inaccuracies in this document.

SoC and other major components used in this product may have several silicon errata associated with it. Under no circumstances, iWave Systems shall be liable for the silicon errata and associated issues.

Trademarks

All registered trademarks, product names mentioned in this publication are the property of their respective owners and used for identification purposes only.

Certification

iWave Systems Technologies Pvt. Ltd. is an ISO 9001:2015 Certified Company.



Warranty & RMA

Warranty support for Hardware: 1 Year from iWave or iWave's EMS partner.

For warranty terms, go through the below web link,

<http://www.iwavesystems.com/support/warranty.html>

For Return Merchandise Authorization (RMA), go through the below web link,

<http://www.iwavesystems.com/support/rma.html>

Technical Support

iWave Systems technical support team is committed to provide the best possible support for our customers so that our Hardware and Software can be easily migrated and used.

For assistance, contact our Technical Support team at,

Email : support.ip@iwavesystems.com
Website : www.iwavesystems.com
Address : iWave Systems Technologies Pvt. Ltd.
7/B, 29th Main, BTM Layout 2nd Stage,
Bengaluru, Karnataka,
India – 560076

Table of Contents

1. INTRODUCTION	7
1.1 Purpose	7
1.2 SMARC SOM Overview.....	7
1.3 List of Acronyms.....	7
1.4 Terminology Description.....	9
1.5 References	9
1.6 Important Note	10
2. ARCHITECTURE AND DESIGN	11
2.1 i.MX 8M Plus SMARC SOM Block Diagram.....	11
2.2 i.MX 8M Plus SMARC SOM Features.....	12
2.3 i.MX 8M Plus SoC	14
2.4 PCA9450C PMIC	15
2.5 Memory.....	15
2.5.1 LPDDR4 RAM.....	15
2.5.2 eMMC Flash	15
2.5.3 Micro SD Connector (Optional)	15
2.6 Network & Communiation.....	16
2.6.1 Wi-Fi and Bluetooth Interface.....	16
2.6.2 GNSS Module (Optional)	17
2.6.3 RTC Controller	17
2.7 SMARC PCB Edge Connector.....	18
2.7.1 Gigabit Ethernet.....	24
2.7.2 SERDES and MDIO Interface (Optional)	25
2.7.3 SD Interface.....	26
2.7.4 USB3.0 OTG Interface.....	27
2.7.5 USB3.0 Host Interface	28
2.7.6 USB 2.0 Host Interface	29
2.7.7 PCIe Interface	31
2.7.8 MIPI CSI Interface.....	31
2.7.9 HDMI TX Interface.....	33
2.7.10 MIPI DSI/LVDS Display Interface	34
2.7.11 Audio Interface.....	36
2.7.12 SPI Interface	37
2.7.13 Data UART.....	37
2.7.14 SMARC GPIOs	38
2.7.15 CAN Interface	39
2.7.16 I2C Interface.....	39
2.7.17 Control Signals	40
2.7.18 Boot Select.....	41
2.7.19 Power and GND.....	42
2.8 Other Features	43

2.8.1	Fan Header	43
2.8.2	MIPI CSI Camera Connector (Optional)	44
2.8.3	Debug UART Header (Optional)	45
2.8.4	JTAG Header (Optional).....	46
2.9	i.MX 8M Plus Pin Multiplexing on SMARC Edge	48
3.	TECHNICAL SPECIFICATION.....	56
3.1	Electrical Characteristics	56
3.1.1	Power Input Requirement	56
3.1.2	Power Input Sequencing.....	57
3.1.3	Power Consumption	58
3.2	Environmental Characteristics	59
3.2.1	Environmental Specification.....	59
3.2.2	Heat Sink/ Heat Spreader.....	59
3.2.3	RoHS Compliance	60
3.2.4	Electrostatic Discharge.....	60
3.3	Mechanical Characteristics	61
3.3.1	i.MX 8M Plus SMARC SOM Mechanical Dimensions	61
4.	ORDERING INFORMATION	62
5.	APPENDIX.....	65
5.1	i.MX 8M Plus SMARC SOM Development Platform	65

List of Figures

Figure 1: i.MX 8M Plus SMARC SOM Block Diagram.....	11
Figure 2: i.MX 8M Plus Block Diagram	14
Figure 3: Wi-Fi and Bluetooth Antenna Connector.....	16
Figure 4: SMARC Edge Connector	18
Figure 5: Fan Header	43
Figure 6: Power Input Sequencing	57
Figure 7: i.MX 8M Plus SMARC SOM Development Platform.....	65

List of Tables

Table 1: Acronyms & Abbreviations.....	7
Table 2: Terminology	9
Table 3: SMARC Edge Connector Pinouts	19
Table 4: FAN Header Pin Assignment.....	43
Table 5: Debug UART Header Pin Assignment.....	46
Table 6: JTAG Header Pin Assignment	46
Table 7: i.MX 8M Plus SoC IOMUX for SMARC Edge Connector interfaces	48
Table 8: Power Input Requirement.....	56
Table 9: Power Sequence Timing.....	57
Table 10: Power Consumption.....	58
Table 11: Environmental Specification	59
Table 12: Orderable Product Part Numbers	62

1. INTRODUCTION

1.1 Purpose

This document is the Hardware User Guide for the SMARC V2.1.1 SOM based on the NXP's i.MX 8M Plus (Quad/QuadLite/Dual) Application processor. This board is fully supported by iWave Systems Technologies Pvt. Ltd. This Guide provides detailed information on the overall design and usage of the i.MX 8M Plus SMARC SOM from a Hardware Systems perspective.

1.2 SMARC SOM Overview

The SMARC V2.1.1 ("Smart Mobility ARChitecture version 2.1.1") is a versatile small form factor computer Module definition targeting application that require low power, low costs, and high performance. The Modules are used as building blocks for portable and stationary embedded systems. The core SoC and support circuits, including DRAM, boot flash, power sequencing, SoC power supplies, GBE, GNSS module (optional) and dual channel LVDS/ MIPI display transmitter are concentrated on the Module. The Modules are used with application specific Carrier Boards that implement other features such as audio CODECs, touch controllers, wireless devices, etc. The modular approach allows scalability, fast time to market and upgradability while still maintaining low costs, low power and small physical size.

NXP's i.MX 8M Plus SoC based SMARC System on Module is rich with i.MX 8M Plus features along with on SOM LPDDR4, eMMC, Dual Ethernet PHY (one with TSN support), USB2.0 Hub, Wi-Fi & BT module, GNSS module (optional) and comes in compact 82mm x 50mm form factor. The Module PCB has 314 edge fingers that mate with a low profile 314 pin 0.5mm pitch right angle connector.

1.3 List of Acronyms

The following acronyms will be used throughout this document.

Table 1: Acronyms & Abbreviations

Acronyms	Abbreviations
ARM	Advanced RISC Machine
BT	Bluetooth
CAN	Controller Area Network
CODEC	Coder-Decoder
CPU	Central Processing Unit
CSI	Camera Serial Interface
CTS	Clear to Send
DP	Display Port
DRAM	Dynamic Random Access Memory
DSI	Display Serial Interface
eDP	embedded Display Port

Acronyms	Abbreviations
eMMC	Enhanced Multi Media Card
EMS	Electronics manufacturing services
ESAI	Enhanced Serial Audio Interface
FIFO	First In First Out
FLEXCAN	Flexible Control Area Network
FlexSPI	Flexible Serial Peripheral Interface
GB	Giga Byte
Gbps	Gigabits per sec
GPIO	General Purpose Input Output
GPU	Graphics Processing Unit
HDCP	High-bandwidth Digital Content Protection
HDMI	High-Definition Multimedia Interface
I2C	Inter-Integrated Circuit
I2S	Inter-Integrated Sound
IC	Integrated Circuit
JTAG	Joint Test Action Group
LPDDR4	Low Power Double Data Rate4
MHz	Mega Hertz
MIPI	Mobile Industry Processor Interface
MLB	Media Local Bus
OTG	On-The-Go
PCB	Printed Circuit Board
PCIe	Peripheral Component Interconnect express
PMIC	Power management integrated circuits
RAM	Random Access Memory
RGMI	Reduced gigabit media-independent interface
RoHS	Restriction of Hazardous Substances
RTC	Real Time Clock
RTS	Request to Send
SAI	Serial Audio Interface
SATA	Serial Advanced Technology Attachment
SD	Secure Digital
SDIO	Secure Digital Input Output
SMARC	Smart Mobility ARChitecture
SoC	System on Chip
SOM	System On Module
SPDIF	The Sony/Philips Digital Interface
SPI	Serial Peripheral Interface
UART	Universal Asynchronous Receiver/Transmitter
USB	Universal Serial Bus
VPU	Video Processing Unit
Wi-Fi	Wireless Fidelity

1.4 Terminology Description

In this document, wherever Signal Type is mentioned, below terminology is used.

Table 2: Terminology

Terminology	Description
I	Input Signal
O	Output Signal
IO	Bidirectional Input/output Signal
CMOS	Complementary Metal Oxide Semiconductor Signal
HCSL	High speed Current Steering Logic
LVDS	Low Voltage Differential Signal
HDMI	High-Definition Multimedia Interface Differential Signal
DP	Display Port Differential Signal
GBE	Gigabit Ethernet Signal
PCIe	PCIe differential pair signals
SATA	Serial Advanced Technology Attachment differential pair signals
USB HS	Universal Serial Bus High Speed differential pair signals
USB SS	Universal Serial Bus Super Speed differential pair signals
MIPI	Mobile Industry Processor Interface differential pair signals
OD	Open Drain Signal
OC	Open Collector Signal
Power	Power Pin
PU	Pull Up
PD	Pull Down
NA	Not Applicable
NC	Not Connected

Note: Signal Type does not include internal pull-ups or pull-downs implemented by the chip vendors and only includes the pull-ups or pull-downs implemented On-SMARC SOM.

1.5 References

- IMX8MPXEC_Rev_x.pdf
- iMX_8M_Plus_RM_Revx.pdf
- SMARC Specification V2.1.1

1.6 Important Note

In this document, wherever i.MX 8M Plus SoC signal name is mentioned, it is followed as per below format for easy understanding.

- If SoC pin doesn't have multiplexing option or used for dedicated functionality then the signal name is mentioned as functionality name.

"Functionality Name"

Example: ENET1_RGMII_TXC

In this signal, ***ENET1_RGMII_TXC*** pad is used for same functionality.

- If SoC pin selected as GPIO function, then the signal name is mentioned as

"Functionality Description (GPIO Number)"

Example: BCONFIG_0(GPIO1_05)

In this signal, ***BCONFIG_0*** is the GPIO functionality and ***GPIO1_05*** is the GPIO number.

Note: The above naming is not applicable for other signals which are not connected to SoC.

2.2 i.MX 8M Plus SMARC SOM Features

i.MX 8M Plus SMARC SOM supports the following features.

SoC

- i.MX 8M Plus Applications Processor¹:
 - i.MX 8M Plus Quad : 4 x Cortex-A53, 1 x Cortex-M7, GPU, VPU, NPU, ISP & HiFi4 Audio DSP
 - i.MX 8M Plus QuadLite : 4 x Cortex-A53, 1 x Cortex-M7 & GPU
 - i.MX 8M Plus Dual : 2 x Cortex-A53, 1 x Cortex-M7, GPU, VPU, NPU, ISP & HiFi4 Audio DSP

Power

- PCA9450C PMIC

Memory

- LPDDR4 - 2GB (Expandable up to 8GB)^{1,2}
- eMMC Flash - 16GB (Expandable up to 128GB)²
- Micro SD Connector (Optional)⁴

Other On-SOM Features

- WiFi 802.11a/b/g/n/ac + BT 5.0 Module³
- Gigabit Ethernet PHY Transceiver x 2
- USB 2.0 High Speed 4-Port Hub
- RTC Controller
- FAN Header
- GNSS Module (Optional)⁴
- Debug UART Header (Optional)
- JTAG Header (Optional)

MIPI-CSI Camera Connector (Optional)

- MIPI CSI x 1 Channel (1 x 4lane)
- I2C x 1 Port

SMARC PCB Edge Interfaces

- Gigabit Ethernet x 2 Ports (through On-SOM Gigabit Ethernet PHY transceiver)
- SERDES x 2Ports (Optional. Either Gigabit Ethernet or SERDES can be supported)
- SD (4bit) x 1 Port
- USB 3.0 OTG x 1 Port (Including USB2.0 lanes)
- USB3.0 Host x 1 Port
- USB 2.0 Host x 4Ports (through On-SOM USB Hub)
- PCIe x 1 Ports
- MIPI CSI x 2 Channel (1x2lane and 1x4lane)

- HDMI 2.0 Transmitter x 1 Port
- LVDS0/MIPI DSI x 1 Channel⁵
- LVDS1 x 1 Channel
- SAI/I2S (Audio Interface) x 2 Port
- SPI x 2 Port
- Data UART (with CTS & RTS) x 1 Port⁶
- Data UART (without CTS & RTS) x 2 Port (One port can be used as Debug Port)⁴
- SMARC GPIO x 14⁷
- CAN FD x 2 Port
- I2C x 4 Ports

General Specification

- Power Supply : 5V, 2.5A
- Form Factor : 82mm X 50mm (SMARC V2.1.1 Specification)

- ^{1.} The i.MX 8M Plus supports upto 4GB of RAM. It can support 8GB RAM (32-bit) if LPDDR4 chip is available.
- ^{2.} Memory Size will differ based on iWave's SOM Product Part Number.
- ^{3.} In Murata-1MW, Wi-Fi is supported by using SDIO interface, hence On SOM microSD will be an optional feature.
- ^{4.} In default configuration, UART3 interface of i.MX 8M Plus is connected to SMARC Edge. In on SOM GNSS module is used, UART3 will not be supported on SMARC Edge.
- ^{5.} The i.MX 8M Plus supports MIPI_DSI and LVDS interface, but in SMARC Specification LVDS and MIPI_DSI interface pins are multiplexed hence any one can be supported at a time based on SOM part Number. By default, MIPI DSI is supported.
- ^{6.} In default configuration, UART1 interface of i.MX 8M Plus is connected to on SOM Bluetooth module. One more UART with CTS and RTS can be supported, if Bluetooth is not supported.
- ^{7.} In default configuration, SMARC GPIOs 12 and 14 are not supported and instead LVDS1 VDD_Enable and Backlight Enable GPIOs are supported.

2.3 i.MX 8M Plus SoC

iW-RainboW-G40M SMARC SOM can support i.MX 8M Plus SoCs from NXP. The i.MX 8M Plus Family consists of three processors: i.MX 8M Plus Quad, i.MX 8M Plus QuadLite & i.MX 8M Plus Dual. The Major Difference between i.MX 8M Plus SoCs are:

- i.MX 8M Plus Quad : 4 x Cortex-A53, 1 x Cortex-M7, GPU, VPU, NPU, ISP & HiFi4 Audio DSP
- i.MX 8M Plus QuadLite : 4 x Cortex-A53, 1 x Cortex-M7 & GPU
- i.MX 8M Plus Dual : 2 x Cortex-A53, 1 x Cortex-M7, GPU, VPU, NPU, ISP & HiFi4 Audio DSP

The i.MX 8M Plus processors along with ARM core supports integrated NPU of 2.3 TOPs, OpenCL GPU, Image Signal Processor, 1080p60 video encode and decode capable VPU, 3 x display controllers, multiple display output options, including MIPI-DSI, HDMI 2.0, and LVDS. Memory interfaces supporting LPDDR4, Quad SPI/Octal SPI (FlexSPI), eMMC 5.1, SD 3.0 and a wide range of peripheral I/Os such as PCIe 3.0 provide wide flexibility.

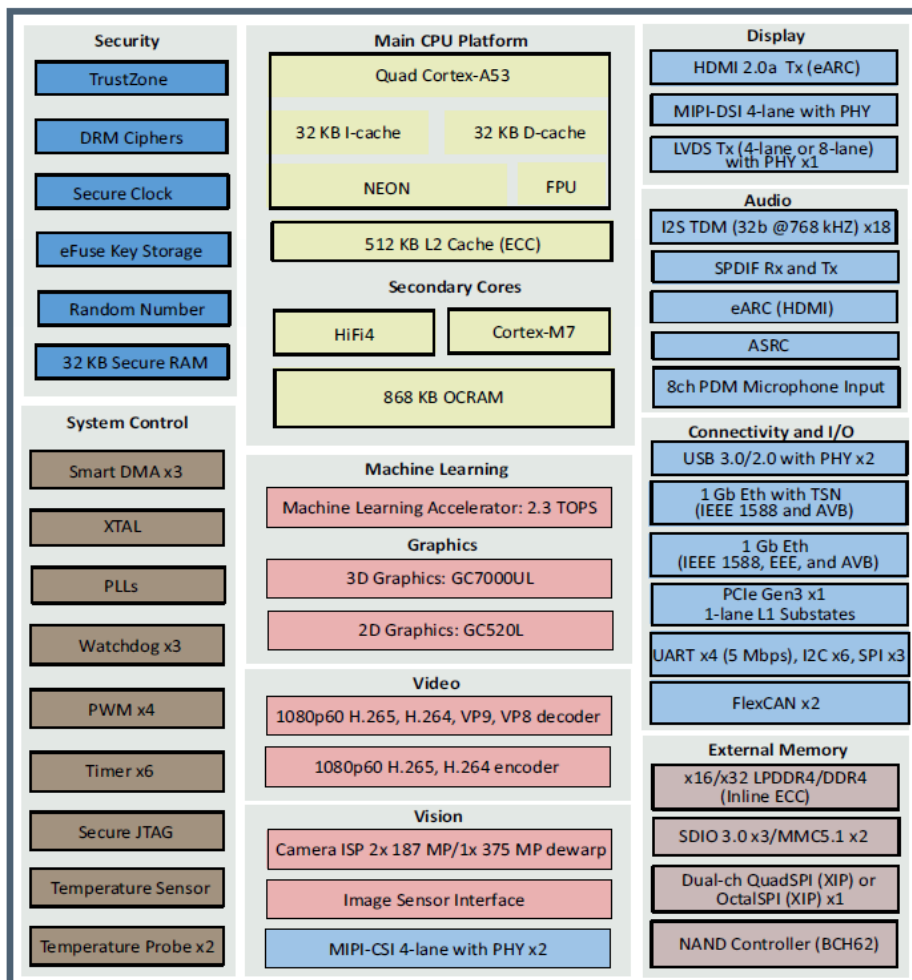


Figure 2: i.MX 8M Plus Block Diagram

Note: The i.MX 8M Plus processor offers numerous advanced features, please refer the latest i.MX 8M Plus Datasheet & Reference Manual for Electrical characteristics and other information, which may be revised from time to time.

2.4 PCA9450C PMIC

The i.MX 8M Plus SMARC SOM uses one PCA9450C PMIC (U9) for SOM Power management. The PCA9450C features six high efficiency step-down regulators and five linear regulators. It is a high-performance power management integrated circuit (PMIC) that provides a highly programmable/configurable architecture with fully integrated power devices and built-in one-time programmable memory stores key start up configurations, drastically reducing external components typically used to set output voltage and sequence of external regulators. Regulator parameters are adjustable through high-speed I2C after start up offering flexibility for different system states. The PCA9450C PMIC comes in 56pin 7x7 QFN Package and is placed on the Top side of the SOM.

2.5 Memory

2.5.1 LPDDR4 RAM

The i.MX 8M Plus SMARC SOM supports 2GB LPDDR4 RAM memory by default using 32bit DDR_CH0 channel of i.MX 8M Plus SoC to support LPDDR4 up to 2GHz. LPDDR4 part U14 is placed on Top side of the SOM. The RAM size can be expandable up to maximum of 8GB (if chips are available). To customize the LPDDR4 memory size, contact iWave.

2.5.2 eMMC Flash

The i.MX 8M Plus SMARC SOM supports 16GB eMMC as default boot and storage device. This is directly connected to uSDHC3 controller of the i.MX 8M Plus SoC and operates at 1.8V (I/O supply) and 3.3V (NAND core supply) Voltage levels.

The eMMC flash memory (U30) is physically located on bottom side of the SMARC SOM. The memory size of the eMMC Flash can be customised based on the requirement by contacting iWave Support Team.

2.5.3 Micro SD Connector (Optional)

The i.MX 8M Plus SMARC SOM optionally supports Micro SD connector which can be used to connect Micro SD card as optional Mass storage device. Micro SD card connector (J5) is connected to the USDHC1 controller of the i.MX 8M Plus SoC.

The main power to Micro SD Card Connector is 3.3 Voltage. The i.MX 8M Plus SMARC SOM supports configurable I/O voltage levels for USDHC1 lines through GPIO1_IO03. If GPIO1_IO03 is set to low, then 3.3V IO level is selected for uSDHC1 lines. If GPIO1_IO03 is set to high, then 1.8V IO level is selected for uSDHC1 lines. Micro SD Connector is physically located on Top side of the i.MX 8M Plus SMARC SOM.

Note: In default configuration USDHC1 is used for on board Wi-Fi module. Contact iWave Support team if microSD feature is required or refer Application Note: "TBD"

2.6 Network & Communication

2.6.1 Wi-Fi and Bluetooth Interface

The i.MX 8M Plus SMARC SOM is integrated with Murata's "LBEE5HY1MW" based Wi-Fi & Bluetooth module. The LBEE5HY1MW module is a very high-performance module based on Cypress CYW43455 combo chipset which supports WiFi IEEE 802.11a/b/g/n/ac + Bluetooth 5.0 BR/EDR/LE standard.

The LBEE5HY1MW module utilizes highly optimized IEEE 802.11 Bluetooth coexistence protocols and supports single stream 1x1 IEEE 802.11 a/b/g/n/ac mode providing up to 390Mbps. The LBEE5HY1MW module features small form factor when integrating Power Amplifier (PA), Low Noise Amplifier (LNA), Transmit/Receive switch, Power Management. The LBEE5HY1MW module need external Antenna but it requires a 32.768 kHz clock for sleep operation.

The LBEE5HY1MW module (U19) provides Secure Digital Input Output (SDIO) for interfacing with the host controller for Wi-Fi and UART interface for Bluetooth. The i.MX 8M Plus SMARC SOM uses processor's UART1 interface for Bluetooth and USDHC1 interface for Wi-Fi in default configuration. In i.MX 8M Plus SMARC SOM, antenna pin of Wi-Fi & Bluetooth module is connected to J7 Connector.

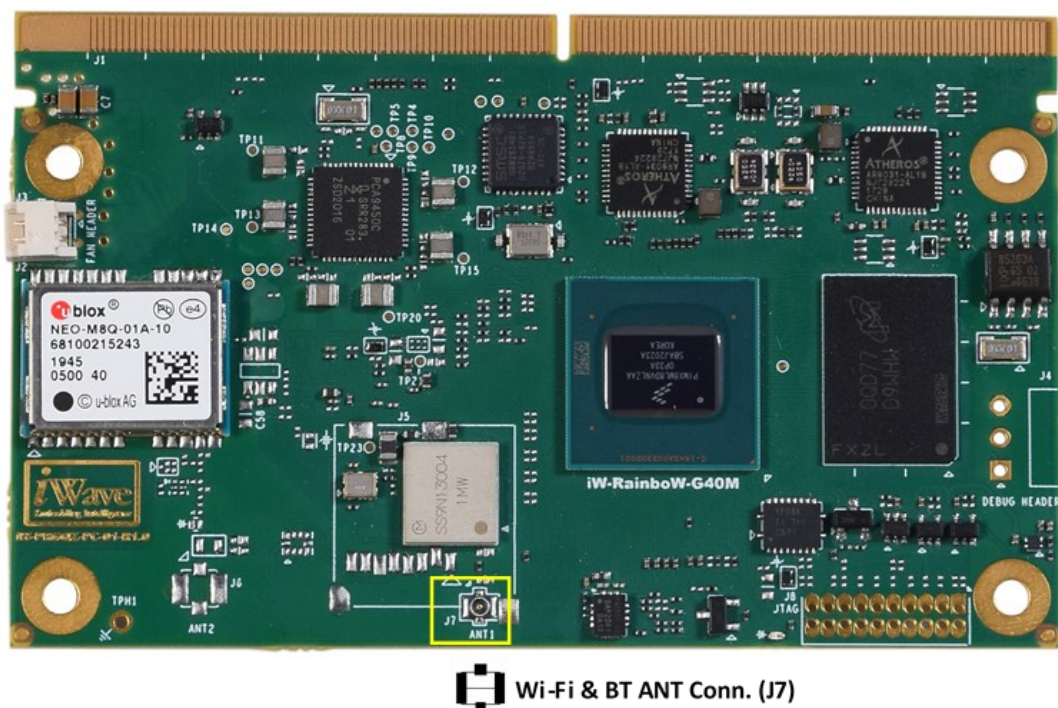


Figure 3: Wi-Fi and Bluetooth Antenna Connector

Connector Part Number - : MM4829-2702RA4 from Murata Electronics.

Antenna Part Number - : 2042811100 from Molex/from Taoglas Limited

Note: The LBEE5HY1MW module supports operating temperature -30°C to 85°C with the default module's firmware. To set the module temperature to industrial grade in firmware, please contact iWave.

2.6.2 GNSS Module (Optional)

The i.MX 8M Plus SMARC SOM can be optionally integrated with u-blox's "NEO-M8Q-01A" based GNSS module. The NEO-M8Q-01A module is built on the exceptional performance of the u-blox M8 GNSS engine in the industry proven NEO form factor. It utilizes concurrent reception of up to three GNSS systems (GPS/Galileo together with BeiDou or GLONASS) for more reliable positioning.

The NEO-M8Q-01A provides high sensitivity and minimal acquisition times while maintaining low system power. The NEO-M8Q-01A combines a high level of robustness and integration capability along with flexible connectivity options via USB, I2C UART and SPI. The DDC (I2C compatible) interface provides connectivity and enables synergies with most u-blox cellular modules.

The i.MX 8M Plus SMARC SOM makes use of the UART3 interface which is by default connected to the SMARC Edge connector for communication between the Host and Device. The Antenna pin of the module can be connected to the J6 Antenna connector through an Active or Passive Path as per the requirement.

Connector Part Number - : 734120110 from Molex.

Antenna Part Number - : TBD

Note: In default configuration GNSS Module is not populated. Contact iWave Support team if GNSS feature is required or refer Application Note: "TBD"

2.6.3 RTC Controller

The i.MX 8M Plus SMARC SOM by supports external RTC Controller "PCF85263" On-SOM for Real time clock support. This external RTC Controller is connected to i.MX 8M Plus SoC through I2C3 Interface and operates at 3.3V voltage level. In SOM power off condition, this device will take power from SMARC PCB Edge (VDD_RTC) coin cell power input (Pin S147) and continues to keep the current time.

2.7 SMARC PCB Edge Connector

SMARC PCB edge connector (J1) has standard pinout as per SMARC Specification V2.1.1. The interfaces which are available at 314pin SMARC Edge connector are explained in the following sections.

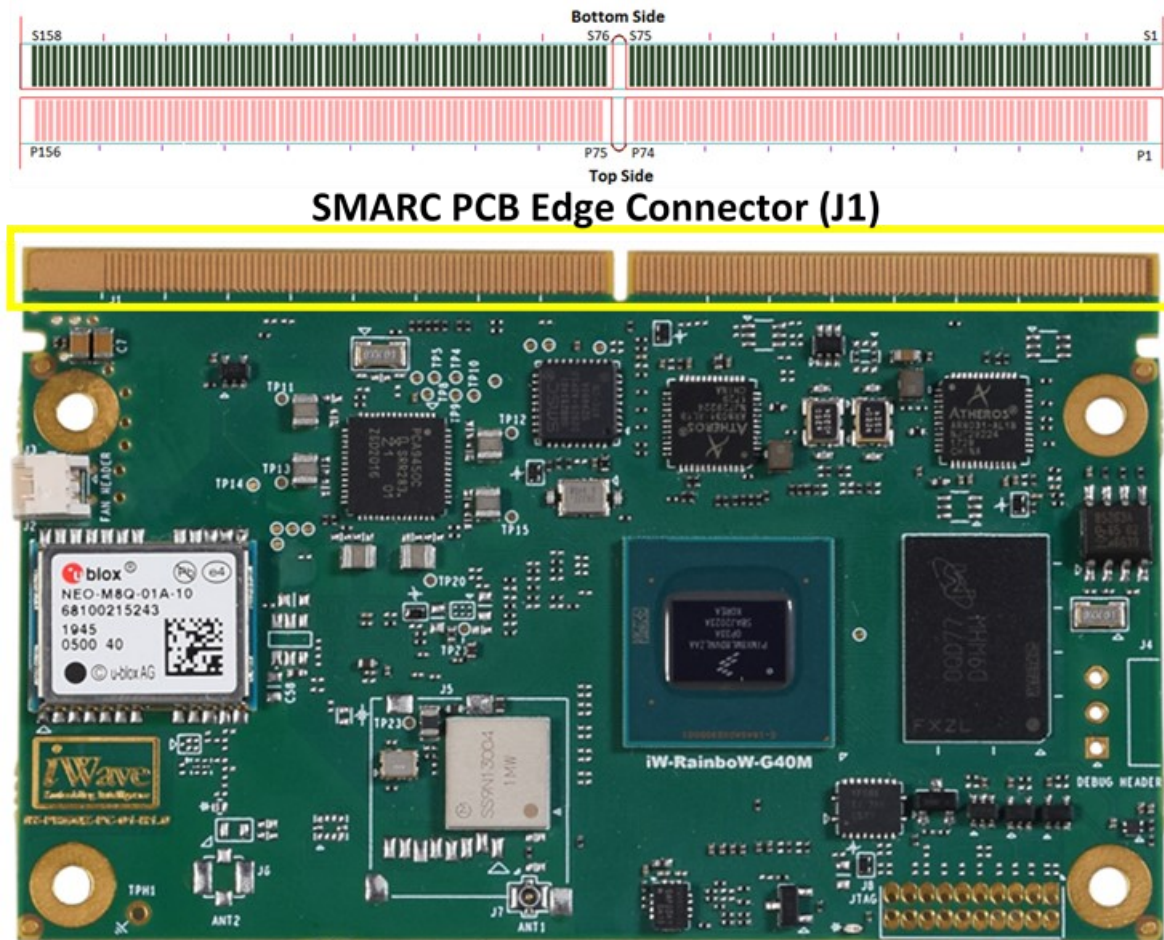


Table 3: SMARC Edge Connector Pinouts

Signal	SMARC Pin (Top)	SMARC Pin (Bottom)	Signal
GPIO_SMB_ALERT_GPIO5_02	P1	S1	I2C5_SCL(SPDIF_TX)
GND	P2	S2	I2C5_SDA(SPDIF_RX)
MIPI_CSI2_CLK_P	P3	S3	GND
MIPI_CSI2_CLK_N	P4	S4	NC
GBE1_PPS_SDP	P5	S5	I2C3_SCL
GBE0_PPS_SDP	P6	S6	CAMERA_CCMCLKO1(ECSPI2_MISO)
MIPI_CSI2_D0_P	P7	S7	I2C3_SDA
MIPI_CSI2_D0_N	P8	S8	MIPI_CSI1_CLK_P
GND	P9	S9	MIPI_CSI1_CLK_N
MIPI_CSI2_D1_P	P10	S10	GND
MIPI_CSI2_D1_N	P11	S11	MIPI_CSI1_D0_P
GND	P12	S12	MIPI_CSI1_D0_N
MIPI_CSI2_D2_P	P13	S13	GND
MIPI_CSI2_D2_N	P14	S14	MIPI_CSI1_D1_P
GND	P15	S15	MIPI_CSI1_D1_N
MIPI_CSI2_D3_P	P16	S16	GND
MIPI_CSI2_D3_N	P17	S17	GBE1_MDI0+
GND	P18	S18	GBE1_MDI0-
GBE0_MDI3-	P19	S19	GBE1_LINK100#
GBE0_MDI3+	P20	S20	GBE1_MDI1+
GBE0_LINK100#	P21	S21	GBE1_MDI1-
GBE0_LINK1000#	P22	S22	GBE1_LINK1000#
GBE0_MDI2-	P23	S23	GBE1_MDI2+
GBE0_MDI2+	P24	S24	GBE1_MDI2-
GBE0_LINK_ACT#	P25	S25	GND
GBE0_MDI1-	P26	S26	GBE1_MDI3+
GBE0_MDI1+	P27	S27	GBE1_MDI3-
VPHY0_DVDDL	P28	S28	VPHY1_DVDDL
GBE0_MDI0-	P29	S29	NC (Optionally GBE0_SOP)
GBE0_MDI0+	P30	S30	NC (Optionally GBE0_SON)
NC	P31	S31	GBE1_LINK_ACT#
GND	P32	S32	NC (Optionally GBE0_SIP)
GPIO2_20(SD2_WP)	P33	S33	NC (Optionally GBE0_SIN)
SD2_CMD	P34	S34	GND
GPIO2_12(SD2_CD_B)	P35	S35	USB_HUB3OUT_DP
SD2_CLK	P36	S36	USB_HUB3OUT_DM
GPIO2_19(SD2_RESET_B)	P37	S37	VBUS_OTG1
GND	P38	S38	SAI2_MCLK
SD2_DATA0	P39	S39	SAI2_TX_SYNC(SAI2_TXFS)
SD2_DATA1	P40	S40	SAI2_TX_DATA0(SAI2_TXD0)

i.MX 8M Plus SMARC SOM Hardware User Guide

Signal	SMARC Pin (Top)	SMARC Pin (Bottom)	Signal
SD2_DATA2	P41	S41	SAI2_RX_DATA0(SAI2_RXD0)
SD2_DATA3	P42	S42	SAI2_TX_BCLK(SAI2_TXC)
ECSPI1_SS0	P43	S43	NC
ECSPI1_SCLK	P44	S44	NC
ECSPI1_MISO	P45	S45	ENET1_MDC(SAI1_RXD2)
ECSPI1_MOSI	P46	S46	ENET1_MDIO(SAI1_RXD3)
GND	P47	S47	GND
NC	P48	S48	I2C2_SCL
NC	P49	S49	I2C2_SDA
GND	P50	S50	SAI3_TX_SYNC(SAI3_TXFS)
NC	P51	S51	SAI3_TX_DATA0(SAI3_TXD)
NC	P52	S52	SAI3_RX_DATA0(NAND_DATA00)
GND	P53	S53	SAI3_TX_BCLK(SAI3_TXC)
ECSPI2_SS0	P54	S54	NC
NC	P55	S55	USB_HUB4_OC
ECSPI2_SCLK	P56	S56	NC
ECSPI2_MISO(I2C4_SCL)	P57	S57	NC
ECSPI2_MOSI	P58	S58	NC
GND	P59	S59	USB_HUB4OUT_DP
NC (Optionally USB_OTG1_DP)	P60	S60	USB_HUB4OUT_DM
NC (Optionally USB_OTG1_DM)	P61	S61	GND
NC (Optionally USB1_OTG_OC(GPIO1_IO13))	P62	S62	USB1_TX_P
NC (Optionally VBUS_OTG1)	P63	S63	USB1_TX_N
NC (Optionally USB_OTG1_ID)	P64	S64	GND
USB_HUB1OUT_DP	P65	S65	USB1_RX_P
USB_HUB1OUT_DM	P66	S66	USB1_RX_N
USB_HUB1_OC	P67	S67	GND
GND	P68	S68	USB_OTG1_DP
USB_HUB2OUT_DP	P69	S69	USB_OTG1_DM
USB_HUB2OUT_DM	P70	S70	GND
USB_HUB2_OC	P71	S71	USB2_TX_P
NC	P72	S72	USB2_TX_N
NC	P73	S73	GND
USB1_OTG_OC(GPIO1_IO13)	P74	S74	USB2_RX_P
		S75	USB2_RX_N

Signal	SMARC Pin (Top)	SMARC Pin (Bottom)	Signal
Key			Key
GPIO_PCIE_RST(GPIO1_IO12)	P75	S76	NC
USB_HUB3_OC	P76	S77	NC
NC	P77	S78	NC (Optionally GBE1_SIP)
NC (Optional PCIE_CLKREQ_B(SAI3_MCLK))	P78	S79	NC (Optionally GBE1_SIN)
GND	P79	S80	GND
NC	P80	S81	NC (Optionally GBE1_SOP)
NC	P81	S82	NC (Optionally GBE1_SON)
GND	P82	S83	GND
PCIE_REFCLK_DP	P83	S84	NC
PCIE_REFCLK_DM	P84	S85	NC
GND	P85	S86	GND
PCIE_RXN_P	P86	S87	NC
PCIE_RXN_N	P87	S88	NC
GND	P88	S89	GND
PCIE_TXN_P	P89	S90	NC
PCIE_TXN_N	P90	S91	NC
GND	P91	S92	GND
HDMI_TX_D2_P	P92	S93	NC
HDMI_TX_D2_N	P93	S94	NC
GND	P94	S95	NC
HDMI_TX_D1_P	P95	S96	NC
HDMI_TX_D1_N	P96	S97	NC
GND	P97	S98	NC
HDMI_TX_D0_P	P98	S99	NC
HDMI_TX_D0_N	P99	S100	NC
GND	P100	S101	GND
HDMI_TX_CLK_P	P101	S102	NC
HDMI_TX_CLK_N	P102	S103	NC
GND	P103	S104	USB_OTG1_ID
HDMI_TX_HPD	P104	S105	NC
HDMI_TX_DDC_SCL	P105	S106	NC
HDMI_TX_DDC_SDA	P106	S107	LCD1_BKLT_EN_GPIO3_14(NAND_DQS)
NC (Optionally GPIO3_IO28(HDMI_CEC))	P107	S108	LVDS1_CLK_P
SMARC_GPIO_0(GPIO4_18)	P108	S109	LVDS1_CLK_N
SMARC_GPIO_1(GPIO4_19)	P109	S110	GND
SMARC_GPIO_2(GPIO4_0)	P110	S111	LVDS1_D0_P
SMARC_GPIO_3(GPIO4_1)	P111	S112	LVDS1_D0_N
SMARC_GPIO_4(GPIO4_2)	P112	S113	NC

i.MX 8M Plus SMARC SOM Hardware User Guide

Signal	SMARC Pin (Top)	SMARC Pin (Bottom)	Signal
SMARC_GPIO_5(GPIO3_20)	P113	S114	LVDS1_D1_P
SMARC_GPIO_6(GPIO4_22)	P114	S115	LVDS1_D1_N
SMARC_GPIO_7(GPIO4_21)	P115	S116	LCD1_VDD_EN_GPIO3_28(HDMI_CEC)
SMARC_GPIO_8(GPIO4_28)	P116	S117	LVDS1_D2_P
SMARC_GPIO_9(GPIO4_3)	P117	S118	LVDS1_D2_N
SMARC_GPIO_10(GPIO3_21)	P118	S119	GND
SMARC_GPIO_11(GPIO5_5)	P119	S120	LVDS1_D3_P
GND	P120	S121	LVDS1_D3_N
NC (Optionally I2C1_SCL)	P121	S122	PWM2_OUT(SAI5_RXD0)
NC (Optionally I2C1_SDA)	P122	S123	NC (Optionally SMARC_GPIO_13(GPIO3_28))
BOOT_SELO#	P123	S124	GND
BOOT_SEL1#	P124	S125	LVDS0/DSIO_D0_P
BOOT_SEL2#	P125	S126	LVDS0/DSIO_D0_N
GPIO_RESET_OUT_GPIO1_9_1V8	P126	S127	LCD0_BKLT_EN_GPIO3_7(NAND_DATA0 1)
PMIC_RST_B	P127	S128	LVDS0/DSIO_D1_P
CPU_ON_OFF	P128	S129	LVDS0/DSIO_D1_N
UART2_TXD	P129	S130	GND
UART2_RXD	P130	S131	LVDS0/DSIO_D2_P
UART2_CTS_B(SAI3_RXC)	P131	S132	LVDS0/DSIO_D2_N
UART2_RTS_B(SAI3_RXD)	P132	S133	LCD0_VDD_EN_GPIO3_8(NAND_DATA0 2)
GND	P133	S134	LVDS0/DSIO_CLK_P
UART3_TXD	P134	S135	LVDS0/DSIO_CLK_N
UART3_RXD	P135	S136	GND
NC (Optionally UART1_TX)	P136	S137	LVDS0/DSIO_D3_P
NC (Optionally UART1_RX)	P137	S138	LVDS0/DSIO_D3_N
NC (Optionally UART1_CTS_B)	P138	S139	I2C5_SCL(SPDIF_TX)
NC (Optionally UART1_RTS_B)	P139	S140	I2C5_SDA(SPDIF_RX)
UART4_TXD	P140	S141	PWM1_OUT(I2C4_SDA)
UART4_RXD	P141	S142	NC (Optionally SMARC_GPIO_12(GPIO3_14))
GND	P142	S143	GND
FLEXCAN1_TX(SAI5_RXD1)	P143	S144	NC
FLEXCAN1_RX(SAI5_RXD2)	P144	S145	GPIO_WDT_OUT
FLEXCAN2_TX(SAI5_RXD3)	P145	S146	GPIO_PCl_e_Wake(GPIO1_IO14)
FLEXCAN2_RX(SAI5_MCLK)	P146	S147	VRTC_3V0
VDD_IN	P147	S148	NC
VDD_IN	P148	S149	NC

Signal	SMARC Pin (Top)	SMARC Pin (Bottom)	Signal
VDD_IN	P149	S150	VIN_PWR_BAD#
VDD_IN	P150	S151	NC
VDD_IN	P151	S152	NC
VDD_IN	P152	S153	CARRIER_STBY#
VDD_IN	P153	S154	CARRIER_PWR_ON
VDD_IN	P154	S155	FORCE_RECOV#
VDD_IN	P155	S156	NC
VDD_IN	P156	S157	TEST#
		S158	GND

2.7.1 Gigabit Ethernet

The i.MX 8M Plus SMARC SOM supports two Gigabit Ethernet using two on SOM Ethernet PHY “AR8031” from Atheros, Qualcomm. ENET0 and ENET1 of i.MX 8M Plus SoC are connected to GBE0 and GBE1 ports of SMARC edge connector respectively. The AR8031 integrates Atheros Green ETHOS® power saving technologies and significantly saves power not only during the work time, but also overtime. Atheros Green ETHOS® power savings include ultra-low power in cable unplugged mode or port power down mode, and automatic optimized power saving based on cable length. The AR8031 also supports IEEE 802.3az EEE standard (Energy Efficient Ethernet) and Atheros proprietary SmartEEE. SmartEEE allows legacy MAC/SoC devices without 802.3az support to function as a complete 802.3az system. Further, the AR8031 supports Wake-on-LAN (WoL) feature to be able to help manage and regulate total system power requirements. The GBE0 of i.MX 8M Plus SMARC SOM also optionally supports TSN feature. Contact iWave if TSN support is required.

For more details on GBE0 pinouts, refer below Table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P6	GBE0_PPS_SDP	NA	IO, 3.3V CMOS	NC. <i>Note: Optionally connected to GBE0_PPS_SDP</i>
P19	GBE0_MDI3-	NA	IO, GBE	Gigabit Ethernet MDI differential pair 3 negative.
P20	GBE0_MDI3+	NA	IO, GBE	Gigabit Ethernet MDI differential pair 3 positive.
P21	GBE0_LINK100#	NA	O, 3.3V CMOS 10K PU	100Mbps Ethernet link status LED. <i>Note: Connect to Cathode of LED.</i>
P22	GBE0_LINK1000#	NA	O, 3.3V CMOS 10K PU	Gigabit Ethernet link status LED. <i>Note: Connect to Cathode of LED.</i>
P23	GBE0_MDI2-	NA	IO, GBE	Gigabit Ethernet MDI differential pair 2 negative.
P24	GBE0_MDI2+	NA	IO, GBE	Gigabit Ethernet MDI differential pair 2 positive.
P25	GBE0_LINK_ACT#	NA	O, 3.3V CMOS 10K PU	Gigabit Ethernet activity status <i>Note: Connect to Cathode of LED.</i>
P26	GBE0_MDI1-	NA	IO, GBE	Gigabit Ethernet MDI differential pair 1 negative.
P27	GBE0_MDI1+	NA	IO, GBE	Gigabit Ethernet MDI differential pair 1 positive.
P28	VPHY0_DVDDL	NA	Power	Power for the Centre Tap of Mack Jack connector
P29	GBE0_MDI0-	NA	IO, GBE	Gigabit Ethernet MDI differential pair 0 negative.
P30	GBE0_MDI0+	NA	IO, GBE	Gigabit Ethernet MDI differential pair 0 positive.

For more details on GBE1 pinouts, refer below Table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P5	GBE1_PPS_SDP	NA	IO, 3.3V CMOS	NC. <i>Note: Optionally connected to GBE1_PPS_SDP</i>
S17	GBE1_MDIO+	NA	IO, GBE	Second Gigabit Ethernet MDI differential pair 0 positive.
S18	GBE1_MDIO-	NA	IO, GBE	Second Gigabit Ethernet MDI differential pair 0 negative.
S19	GBE1_LINK100#	NA	O, 3.3V CMOS 10K PU	100Mbps Ethernet link status LED <i>Note: Connect to Cathode of LED.</i>
S20	GBE1_MDI1+	NA	IO, GBE	Second Gigabit Ethernet MDI differential pair 1 positive.
S21	GBE1_MDI1-	NA	IO, GBE	Second Gigabit Ethernet MDI differential pair 1 negative.
S22	GBE1_LINK1000#	NA	O, 3.3V CMOS 10K PU	1000Mbps Ethernet link status LED <i>Note: Connect to Cathode of LED.</i>
S23	GBE1_MDI2+	NA	IO, GBE	Second Gigabit Ethernet MDI differential pair 2 positive.
S24	GBE1_MDI2-	NA	IO, GBE	Second Gigabit Ethernet MDI differential pair 2 negative.
S26	GBE1_MDI3+	NA	IO, GBE	Second Gigabit Ethernet MDI differential pair 3 positive.
S27	GBE1_MDI3-	NA	IO, GBE	Second Gigabit Ethernet MDI differential pair 3 negative.
S28	VPHY1_DVDDL	NA	Power	Power for the Centre Tap of Mack Jack connector.
S31	GBE1_LINK_ACT#	NA	O, 3.3V CMOS 10K PU	Ethernet Activity status LED. <i>Note: Connect to Cathode of LED.</i>

2.7.2 SERDES and MDIO Interface (Optional)

The i.MX 8M Plus SMARC SOM optionally supports two SERDES interface support on the SMARC Edge using the two on SOM Ethernet PHY “AR8031” from Atheros, Qualcomm and a MDIO support from the ENET MDIO (Either ENET0 or ENET1) of the i.MX 8M Plus processor on the SMARC Edge connector. SERDES0 and SERDES1 are from the first and second Ethernet PHY and are optionally connected to SERDES0 and SERDES1 of SMARC edge connector respectively.

For more details on SERDES and MDIO pinouts, refer below Table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S29	GBE0_SOP	NA	O, PCIE	NC. <i>Note: Optionally connected to GBE0_SOP</i>
S30	GBE0_SON	NA	O, PCIE	NC. <i>Note: Optionally connected to GBE0_SON</i>

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S32	GBE0_SIP	NA	I, PCIE	NC. <i>Note: Optionally connected to GBE0_SIP</i>
S33	GBE0_SIN	NA	I, PCIE	NC. <i>Note: Optionally connected to GBE0_SIN</i>
S45	SMARC_MDIO_CLK	NA	O, 1.8V CMOS	NC. <i>Note: Optionally connected to ENET1_MDC</i>
S46	SMARC_MDIO_DATA	NA	IO, 1.8V CMOS	NC. <i>Note: Optionally connected to ENET1_MDIO</i>
S78	GBE1_SIP	NA	I, PCIE	NC. <i>Note: Optionally connected to GBE1_SIP</i>
S79	GBE1_SIN	NA	I, PCIE	NC. <i>Note: Optionally connected to GBE1_SIN</i>
S81	GBE1_SOP	NA	O, PCIE	NC. <i>Note: Optionally connected to GBE1_SOP</i>
S82	GBE1_SON	NA	O, PCIE	NC. <i>Note: Optionally connected to GBE1_SON</i>

2.7.3 SD Interface

The i.MX 8M Plus SMARC SOM supports 4bit SD interface over SMARC PCB Edge connector which can be used to connect SD card as Mass storage or optional boot device. uSDHC2 controller of the i.MX 8M Plus SoC is used to support SMARC SD interface. uSDHC2 operates both in 3.3V and 1.8V IO level and supports maximum of 208 Mbit/s per line with 1.8V IO voltage in SDR mode. Controlling GPIOs like Write Protect and Card detect signals also operates at both 1.8V and 3.3V IO level.

For more details on SD pinouts, refer below Table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P33	GPIO2_20(SD2_WP)	SD2_WP/ AC26	I, 1.8/3.3V CMOS 10K PU	SD write Protect.
P34	SD2_CMD	SD2_CMD/ AB28	IO, 1.8/3.3V CMOS	SD command. <i>Note: 10K pullup option is provided.</i>
P35	GPIO2_12(SD2_CD_B)	SD2_CD_B/ AD29	I, 1.8V/3.3V CMOS 10K PU	SD Card Detect.
P36	SD2_CLK	SD2_CLK/	O, 1.8/3.3V	SD Clock

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
		AB29	CMOS	<i>Note: 1K pullup option is provided.</i>
P37	GPIO2_19(SD2_RESET_B)	SD2_RESET_B/ AD28	O, 3.3V CMOS	SD Power enable.
P39	SD2_DATA0	SD2_DATA0/ AC28	IO, 1.8/3.3V CMOS	SD data 0 <i>Note: 10K pullup option is provided.</i>
P40	SD2_DATA1	SD2_DATA1/ AC29	IO, 1.8/3.3V CMOS	SD data 1. <i>Note: 10K pullup option is provided</i>
P41	SD2_DATA2	SD2_DATA2/ AA26	IO, 1.8/3.3V CMOS	SD data 2. <i>Note: 10K pullup option is provided</i>
P42	SD2_DATA3	SD2_DATA3/ AA25	IO, 1.8/3.3V CMOS	SD data 3. <i>Note: 10K pullup option is provided</i>

2.7.4 USB3.0 OTG Interface

The i.MX 8M Plus SMARC SOM supports one USB 3.0 OTG interface and one USB3.0 Host port on SMARC PCB Edge connector. Also, it supports four USB2.0 Host interface on SMARC PCB Edge connector through On-SOM USB 2.0 four port hub.

i.MX 8M Plus SoC's USB OTG1 controller with integrated PHY is used for USB 3.0 OTG interface and directly connected to USB3 port of SMARC PCB Edge connector. This USB3.0 OTG is compliant with the Universal Serial Bus (USB) 3.0 Specifications which supports USB dual-role operation and can be configured as host or device. It supports Super Speed (5 Gbps), High Speed (480 Mbps), Full Speed (12 Mbps) and Low Speed (1.5 Mbps).

For more details on USB pinouts near SMARC edge connector, refer below table:

SMARC Pin No.	SMARC Edge Pin Name	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S37	USB3_VBUS_DET	VBUS_OTG1	NA	I, Power	USB 3.0 OTG VBUS power for detection. <i>Note: Same power is also connected to P63rd pin through resistor and default not populated.</i>
S62	USB3_SSTX+	USB1_TX_P	USB1_TX_P/ A10	O, USB SS/ 0.1uf AC coupled	USB 3.0 OTG Super Speed Transmit Positive.
S63	USB3_SSTX-	USB1_TX_N	USB1_TX_N/ B10	O, USB SS/ 0.1uf AC coupled	USB 3.0 OTG Super Speed Transmit Negative.
S65	USB3_SSRX+	USB1_RX_P	USB1_RX_P/ A9	I, USB SS	USB 3.0 OTG Super Speed Receive Positive.
S66	USB3_SSRX-	USB1_RX_N	USB1_RX_N/ B9	I, USB SS	USB 3.0 OTG Super Speed Receive Negative.
S68	USB3+	USB_OTG1_DP	USB1_D_P/ D10	IO, USB	USB 2.0 OTG High Speed Data Positive.

SMARC Pin No.	SMARC Edge Pin Name	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S69	USB3-	USB_OTG1_DM	USB1_D_N/ E10	IO, USB	USB 2.0 OTG High Speed Data Negative.
P74	USB3_EN_OC #	USB1_OTG_OC(GPIO1_IO13)	GPIO1_IO13/ A6	I, 3.3V CMOS	USB OTG Power Enable/ Over Current Indicator.
S104	USB3_OTG_ID	USB_OTG1_ID	USB1_ID/ B11	I, 3.3V CMOS	USB OTG ID.

2.7.5 USB3.0 Host Interface

The i.MX 8M Plus SMARC SOM supports one USB 3.0 Host interface on SMARC PCB Edge connector. i.MX 8M Plus SoC's USB OTG2 controller with integrated USB3.0 MAC & PHY is used for USB3.0 Host interface and directly connected to USB2 port of SMARC PCB Edge connector. This USB3.0 OTG controller is compliant with the Universal Serial Bus (USB) 3.0 Specifications which supports USB dual-role operation but configured as host only to match the SMARC specification of USB2 port. It supports Super Speed (5 Gbps), High Speed (480 Mbps), Full Speed (12 Mbps) and Low Speed (1.5 Mbps).

To support USB 2.0 Host interface on this USB3.0 Host Interface port, i.MX 8M Plus SoC's USB OTG2 controller with integrated USB 2.0 MAC & PHY is used. This USB2.0 PHY output is connected to USB2 port of SMARC PCB Edge connector through four-port USB hub "USB2514" from Microchip. The Hub is used to support more USB2.0 Host Ports on SMARC PCB Edge connector.

For more details on USB 3.0 Host pinouts on SMARC PCB edge connector, refer the below table.

SMARC Pin No.	SMARC Edge Pin Name	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P69	USB2+	USB_HUB2OUT_DP	NA	IO, USB	USB 2.0 Port2 Data Positive. <i>Note: This pin is connected from 4port USB Hub Out2.</i>
P70	USB2-	USB_HUB2OUT_DM	NA	IO, USB	USB 2.0 Port2 Data Negative. <i>Note: This pin is connected from 4port USB Hub Out2.</i>
P71	USB2_EN_OC #	USB_HUB2_OC	NA	I, 3.3V CMOS/ 10K PU	USB Port2 Power Enable/ Over Current Indicator. <i>Note: This pin is connected to USB Hub.</i>
S71	USB2_SSTX+	USB2_TX_P	USB2_TX_P/ A13	O, USB SS/ 0.1uf AC coupled	USB 3.0 Port2 Transmit Positive.
S72	USB2_SSTX-	USB2_TX_N	USB2_TX_N/ B13	O, USB SS/ 0.1uf AC coupled	USB 3.0 Port2 Transmit Negative.

i.MX 8M Plus SMARC SOM Hardware User Guide

SMARC Pin No.	SMARC Edge Pin Name	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S74	USB2_SSRX+	USB2_RX_P	USB2_RX_P/ A12	I, USB SS	USB 3.0 Port2 Receive Positive.
S75	USB2_SSRX-	USB2_RX_N	USB2_RX_N/ B12	I, USB SS	USB 3.0 Port2 Receive Negative.

2.7.6 USB 2.0 Host Interface

The i.MX 8M Plus SMARC SOM supports four USB2.0 Host interface on SMARC PCB Edge connector. To support four USB2.0 Host interfaces, SOM includes four-port USB hub “USB2514” from Microchip. This Hub is interfaced with i.MX 8M Plus SOC using USB OTG2 controller (with integrated PHY) which supports USB2.0 High-Speed (480 Mbps), Full-Speed (12 Mbps) and Low-Speed (1.5 Mbps) transfer. This Hub output is directly connected to USB1, USB2, USB4 & USB5 port of SMARC PCB Edge connector.

For more details on USB 2.0 Host pinouts on SMARC PCB edge connector, refer the below table.

SMARC Pin No.	SMARC Edge Pin Name	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P60	USB0+	NC	USB1_DP/A14	IO, USB	Default NC. <i>Note: This pin is optionally connected from i.MX 8M Plus SoC USB1 Data Positive for USB 2.0 OTG through resistor and default not populated.</i> <i>Note: USB1 Data Positive is by default connected to S68th pin through resistor and default populated.</i>
P61	USB0-	NC	USB1_DM/B14	IO, USB	Default NC. <i>Note: This pin is optionally connected from i.MX 8M Plus SoC USB1 Data Negative for USB 2.0 OTG through resistor and default not populated.</i> <i>Note: USB1 Data Negative is by default connected to S69th pin through resistor and default populated.</i>
P62	USB0_EN_OC#	NC	SAI5_RXFS/N4	IO, 3.3V CMOS	Default NC. <i>Note: This pin is optionally connected to GPIO3_19 through resistor and default not populated.</i>

i.MX 8M Plus SMARC SOM Hardware User Guide

SMARC Pin No.	SMARC Edge Pin Name	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P63	USB0_VBUS_DET	NC	USB1_VBUS/D14	5V, Power	Default NC. <i>Note: This pin is optionally connected to i.MX 8M Plus SoC's USB1_VBUS for VBUS detection through resistor and default not populated.</i> <i>Note: Same power is also connected to SMARC Edge S37th pin through resistor and default populated.</i>
P64	USB0_OTG_ID	NC	NA	I, 3.3V CMOS	Default NC. <i>Note: This pin is optionally connected to i.MX 8M Plus SoC's USB1_ID pin through resistor and default not populated.</i>
P65	USB1+	USB_HUB10UT_DP	NA	IO, USB	USB 2.0 Port1 Data Positive. <i>Note: This pin is connected from 4port USB Hub Out1.</i>
P66	USB1-	USB_HUB10UT_DM	NA	IO, USB	USB 2.0 Port1 Data Negative. <i>Note: This pin is connected from 4port USB Hub Out1.</i>
P67	USB1_EN_OC#	USB_HUB1_OC	NA	I, 3.3V CMOS/ 10K PU	USB 2.0 Port1 Over Current Indicator. <i>Note: This pin is connected to USB Hub OCS1 pin.</i>
P76	USB4_EN_OC#	USB_HUB3_OC	NA	I, 3.3V CMOS/ 10K PU	USB 2.0 Port3 Over Current Indicator. <i>Note: This pin is connected to USB Hub OCS3 pin.</i>
S35	USB4+	USB_HUB30UT_DP	NA	IO, USB	USB 2.0 Port3 Data Positive. <i>Note: This pin is connected from 4port USB Hub Out3.</i>
S36	USB4-	USB_HUB30UT_DM	NA	IO, USB	USB 2.0 Port3 Data Negative. <i>Note: This pin is connected from 4port USB Hub Out2.</i>
S55	USB5_EN_OC#	USB_HUB4_OC	NA	I, 3.3V CMOS/ 10K PU	USB 2.0 Port4 Over Current Indicator. <i>Note: This pin is connected to USB Hub OCS4 pin.</i>
S59	USB5+	USB_HUB40UT_DP	NA	IO, USB	USB 2.0 Port4 Data Positive. <i>Note: This pin is connected from 4port USB Hub Out4.</i>

i.MX 8M Plus SMARC SOM Hardware User Guide

SMARC Pin No.	SMARC Edge Pin Name	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S60	USB5-	USB_HUB40 UT_DM	NA	IO, USB	USB 2.0 Port4 Data Negative. <i>Note: This pin is connected from 4port USB Hub Out4.</i>

2.7.7 PCIe Interface

The i.MX 8M Plus SMARC SOM supports one PCIe Gen3 lane on SMARC PCB Edge connector. i.MX 8M Plus SoC's PCIe1 lane with integrated PHY is directly connected to PCIe Link A port of SMARC PCB Edge connector. 100MHz external clock oscillator output option is also available connected to SoC & SMARC PCB Edge for PCIe reference clock. By default, internal PCIe Reference Clock is used. Also, PCIe reset and PCIe wake are supported on SMARC PCB Edge connector from i.MX 8M Plus SoC IOs GPIO1_12 & GPIO1_14 respectively.

Note: PCIe differential transmitter lines are ac coupled on SOM itself. Also, when using PCIe differential clock lines from external clock oscillator no external termination is required as they are having On-SOM termination resistors.

For more details on PCIe pinouts, refer below table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P75	GPIO_PCIE_RST(GPIO1_IO12)	GPIO1_IO12/A5	O, 3.3V CMOS	PCIe Channel-A Reset Out.
P78	PCIE_CLKREQ_B	NA	I, 3.3V CMOS	NC. <i>Note: Optionally connected to Enable of PCIe Clock Generator. Optional 10K PU and also optionally connected to GPIO5_02(SAI3_MCLK).</i>
P83	PCIE_REFCLK_DP	NA	O, PCIe	PCIe Channel-A Clock Positive. <i>Note: From External Oscillator.</i>
P84	PCIE_REFCLK_DM	NA	O, PCIe	PCIe Channel-A Clock Negative. <i>Note: From External Oscillator.</i>
P86	PCIE_RXN_P	PCIE_RXN_P/ A14	I, PCIe	PCIe Channel-A Receive Positive.
P87	PCIE_RXN_N	PCIE_RXN_N/ B14	I, PCIe	PCIe Channel-A Receive Negative.
P89	PCIE_TXN_P	PCIE_TXN_P/ A15	O, PCIe / 0.1μF AC Couple	PCIe Channel-A Transmit Positive.
P90	PCIE_TXN_N	PCIE_TXN_N/ B15	O, PCIe / 0.1μF AC Couple	PCIe Channel-A Transmit Negative.

2.7.8 MIPI CSI Interface

The i.MX 8M Plus SoC supports two 4-lane camera interfaces, the CSI-2 Rx Controller Core is compliant to MIPI CSI2 Specification V1.3 except for C-PHY feature and implements all three layers defined by the CSI-2 Specification: Pixel to Byte Packing, Low Level Protocol, and Lane Management. The D-PHY interface of the CSI-2 Rx Controller Core supports

i.MX 8M Plus SMARC SOM Hardware User Guide

PHY Protocol Interface (PPI) compatible MIPI D-PHYs. The Local Interface is an easy-to-use pixel-based interface that supports 1 to 4 virtual channels and all data types. The Local interface runs at the User Interface clock rate for all implementations. The CSI-2 Rx Controller Core takes care of all packet formatting details and transmission over the MIPI bus. The i.MX 8M Plus SoC also supports 2 x ISP for providing aggregate performance and HDR processing. The i.MX 8M Plus SMARC SOM supports one two lane and one four lane MIPI CSI camera interface via SMARC Edge connector along with the other controlling signals. Here all CSI2 lane [3:0] are connected to SMARC edge connector, but only CSI1 lane [1:0] are connected to SMARC edge connector. MIPI CSI1 lane [3:0] are optionally connected to the on SOM MIPI CSI Camera Connector.

For more details on MIPI CSI1 SMARC pinouts, refer below table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S5	I2C3_SCL	I2C3_SCL/ AJ7	O, 1.8V CMOS/ 4.7K PU	MIPI CSI1 I2C Clock.
S6	CAMERA_CCMCKO1 (ECSPi2_MISO)	ECSPi2_MISO/ AH20	O, 1.8V CMOS	Master Clock for Camera.
S7	I2C3_SDA	I2C3_SDA/ AJ6	IO, 1.8V CMOS/ 4.7K PU	MIPI CSI1 I2C Data.
S8	MIPI_CSI1_CLK_P	MIPI_CSI1_CLK_P/ BF20	I, MIPI	MIPI CSI0 differential Clock positive.
S9	MIPI_CSI1_CLK_N	MIPI_CSI1_CLK_N/ BE21	I, MIPI	MIPI CSI0 differential Clock negative.
S11	MIPI_CSI1_D0_P	MIPI_CSI1_D0_P/ D18	I, MIPI	MIPI CSI0 differential data lane 0 positive.
S12	MIPI_CSI1_D0_N	MIPI_CSI1_D0_N/ E18	I, MIPI	MIPI CSI0 differential data lane 0 negative.
S14	MIPI_CSI1_D1_P	MIPI_CSI1_D1_P/ D20	I, MIPI	MIPI CSI0 differential data lane 1 positive.
S15	MIPI_CSI1_D1_N	MIPI_CSI1_D1_N/ E20	I, MIPI	MIPI CSI0 differential data lane 1 negative.

For more details on MIPI CSI2 SMARC pinouts, refer below table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S1	I2C5_SCL(SPDIF_TX)	SPDIF_TX/ AE18	O, 1.8V CMOS/ 4.7K PU	MIPI CSI2 I2C Clock.
S2	I2C5_SDA(SPDIF_RX)	SPDIF_RX/ AD18	IO, 1.8V CMOS/ 4.7K PU	MIPI CSI2 I2C Data.
P3	MIPI_CSI2_CLK_P	MIPI_CSI2_CLK_P/ A23	I, MIPI	MIPI CSI2 differential clock positive.
P4	MIPI_CSI2_CLK_N	MIPI_CSI2_CLK_N/ B23	I, MIPI	MIPI CSI2 differential clock negative.
P7	MIPI_CSI2_D0_P	MIPI_CSI2_D0_P/ A25	I, MIPI	MIPI CSI2 differential data lane 0 positive.
P8	MIPI_CSI2_D0_N	MIPI_CSI2_D0_N/ B25	I, MIPI	MIPI CSI2 differential data lane 0 negative.

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P10	MIPI_CSI2_D1_P	MIPI_CSI2_D1_P/A24	I, MIPI	MIPI CSI2 differential data lane 1 positive.
P11	MIPI_CSI2_D1_N	MIPI_CSI2_D1_N/B24	I, MIPI	MIPI CSI2 differential data lane 1 negative.
P13	MIPI_CSI2_D2_P	MIPI_CSI2_D2_P/A22	I, MIPI	MIPI CSI2 differential data lane 2 positive.
P14	MIPI_CSI2_D2_N	MIPI_CSI2_D2_N/B22	I, MIPI	MIPI CSI2 differential data lane 2 negative.
P16	MIPI_CSI2_D3_P	MIPI_CSI2_D3_P/A21	I, MIPI	MIPI CSI2 differential data lane 3 positive.
P17	MIPI_CSI2_D3_N	MIPI_CSI2_D3_N/B21	I, MIPI	MIPI CSI2 differential data lane 3 negative.

2.7.9 HDMI TX Interface

The i.MX 8M Plus SMARC SOM supports one HDMI Interface on SMARC PCB Edge connector. i.MX 8M Plus SoC's HD Display Transmitter Controller with integrated PHY is directly connected to HDMI port of SMARC PCB Edge connector. It supports dedicated DDC interface on SMARC PCB Edge connector for HDMI EDID read and to carry the HDCP & SCDC commands. i.MX 8M Plus SoC supports HDMI 1.4 Specification & HDMI 2.0a (3840 x 2160p30) Specification. The SoC inbuilt PHY also supports 32 channel audio output support. The HDMI TX PHY of the i.MX 8M Plus SoC supports pixel clock frequency of up to 297MHz.

For more details on HDMI pinouts, refer below table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P92	HDMI_TX_D2_P	HDMI_TX2_P/AH27	O, HDMI	HDMI differential data lane 2 Positive
P93	HDMI_TX_D2_N	HDMI_TX2_N/AJ27	O, HDMI	HDMI differential data lane 2 Negative
P95	HDMI_TX_D1_P	HDMI_TX1_P/AH26	O, HDMI	HDMI differential data lane 1 Positive
P96	HDMI_TX_D1_N	HDMI_TX1_N/AJ26	O, HDMI	HDMI differential data lane 1 Negative
P98	HDMI_TX_D0_P	HDMI_TX0_P/AH25	O, HDMI	HDMI differential data lane 0 Positive
P99	HDMI_TX_D0_N	HDMI_TX0_N/AJ25	O, HDMI	HDMI differential data lane 0 Negative
P101	HDMI_TX_CLK_P	HDMI_TXC_P/AH24	O, HDMI	HDMI differential CLK Positive
P102	HDMI_TX_CLK_N	HDMI_TXC_N/AJ24	O, HDMI	HDMI differential CLK Negative
P104	HDMI_TX_HPD	HDMI_HPD/AE22	I, 1.8V CMOS	HDMI Hot Plug Detect
P105	HDMI_TX_DDC_SCL	HDMI_DDC_SCL/AC22	O, 1.8V CMOS/ 100K PU	HDMI DDC I2C Clock
P106	HDMI_TX_DDC_SDA	HDMI_DDC_SDA/AF22	IO, 1.8V CMOS/ 100K PU	HDMI DDC I2C DATA

2.7.10 MIPI DSI/LVDS Display Interface

SMARC Specification supports two display interfaces over edge connector, which can be either LVDS or MIPI DSI display. The i.MX 8M Plus SoC supports single MIPI DSI and two LVDS display channels. The i.MX 8M Plus SoC MIPI_DSI standard controller is a flexible, high-performance, and easy-to-use digital core that implements all protocol functions defined in the MIPI DSI Specification. The MIPI DSI controller provides an interface that allows communication with MIPI DSI-compliant peripherals. The MIPI DSI D-PHY is a high frequency, low power, low-cost, source-synchronous, physical layer supporting the MIPI Alliance standard for D-PHY.

An option is provided on i.MX 8M Plus SMARC SOM to support either LVDS0 or MIPI DSI1 over the edge connector for Display Channel0 and in default configuration MIPI DSI0 is supported. LVDS 2nd Channel is connected to Display Channel1 of the SMARC Edge Connector.

For more details on DSI pinouts, refer below table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S107	LCD1_BKLT_EN_GPIO3_14 (NAND_DQS)	NAND_DQS/ R26	O, 1.8V CMOS	LCD1 Backlight Enable
S108	LVDS1_CLK_P	LVDS1_CLK_P/ A28	O, LVDS	LVDS1 differential Clock positive
S109	LVDS1_CLK_N	LVDS1_CLK_N/ B28	O, LVDS	LVDS1 differential Clock negative
S111	LVDS1_D0_P	LVDS1_D0_P/ A26	O, LVDS	LVDS1 differential data lane 0 positive
S112	LVDS1_D0_N	LVDS1_D0_N/ B26	O, LVDS	LVDS1 differential data Lane 0 negative
S114	LVDS1_D1_P	LVDS1_D1_P/ A27	O, LVDS	LVDS1 differential data lane 1 positive
S115	LVDS1_D1_N	LVDS1_D1_N/ B27	O, LVDS	LVDS1 differential data lane 1 negative
S116	LCD1_VDD_EN_GPIO3_28 (HDMI_CEC)	HDMI_CEC/ AD22	O, 1.8V CMOS	LCD1 Power Enable
S117	LVDS1_D2_P	LVDS1_D2_P/ B29	O, LVDS	LVDS1 differential data lane 2 positive
S118	LVDS1_D2_N	LVDS1_D2_N/ C28	O, LVDS	LVDS1 differential data lane 2 negative
S120	LVDS1_D3_P	LVDS1_D3_P/ C29	O, LVDS	LVDS1 differential data lane 3 positive
S121	LVDS1_D3_N	LVDS1_D3_N/ D28	O, LVDS	LVDS1 differential data lane 3 negative
S122	PWM2_OUT(SAI5_RXD0)	SAI5_RXD0/ AE16	O, 1.8V CMOS	LCD0 Back Light Brightness control PWM
S125	LVDS0/DSI0_D0_P	MIPI_DSI1_D0_P/ A16 or LVDS0_D0_P/ D29	O, MIPI	MIPI DSI1 differential data lane 0 positive <i>Note: Optionally connected to LVDS0 differential data lane 0 positive</i>

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S126	LVDS0/DSIO_D0_N	MIPI_DSI1_D0_N/ B16 or LVDS0_D0_N/ E28	O, MIPI	MIPI DSI1 differential data lane 0 negatives <i>Note: Optionally connected to LVDS0 differential data lane 0 negative</i>
S127	LCD0_BKLT_EN_GPIO3_7 (NAND_DATA01)	NAND_DATA01/ L25	O, 1.8V CMOS	LCD0 Backlight Enable
S128	LVDS0/DSIO_D1_P	MIPI_DSI1_D1_P/ A17 or LVDS0_D1_P/ E29	O, MIPI	MIPI DSI1 differential data lane 1 positive <i>Note: Optionally connected to LVDS0 differential data lane 1 positive</i>
S129	LVDS0/DSIO_D1_N	MIPI_DSI1_D1_N/ B17 or LVDS0_D1_N/ F28	O, MIPI	MIPI DSI1 differential data lane 1 negative <i>Note: Optionally connected to LVDS0 differential data lane 1 negative</i>
S131	LVDS0/DSIO_D2_P	MIPI_DSI1_D2_P/ A19 or LVDS0_D2_PP/ G29	O, MIPI	MIPI DSI1 differential data lane 2 positive <i>Note: Optionally connected to LVDS0 differential data lane 2 positive</i>
S132	LVDS0/DSIO_D2_N	MIPI_DSI1_D2_N/ B19 or LVDS0_D2_N/ H28	O, MIPI	MIPI DSI1 differential data lane 2 negative <i>Note: Optionally connected to LVDS0 differential data lane 2 negative</i>
S133	LCD0_VDD_EN_GPIO3_8 (NAND_DATA02)	NAND_DATA02/ L24	O, 1.8V CMOS	LCD0 Power Enable
S134	LVDS0/DSIO_CLK_P	MIPI_DSI1_CLK_P/ A18 or LVDS0_CLK_P/ F29	O, MIPI	MIPI DSI1 differential Clock positive <i>Note: Optionally connected to LVDS0 differential Clock positive</i>
S135	LVDS0/DSIO_CLK_N	MIPI_DSI1_CLK_N/ B18 or LVDS0_CLK_N/ G28	O, MIPI	MIPI DSI1 differential Clock negative <i>Note: Optionally connected to LVDS0 differential Clock negative</i>
S137	LVDS0/DSIO_D3_P	MIPI_DSI1_D3_P/ A20 or LVDS0_D3_P/ H29	O, MIPI	MIPI DSI1 differential data lane 3 positive <i>Note: Optionally connected to LVDS0 differential data lane 3 positive</i>
S138	LVDS0/DSIO_D3_N	MIPI_DSI1_D3_N/ B20 or LVDS0_D3_N/ J28	O, MIPI	MIPI DSI1 differential data lane 3 negative <i>Note: Optionally connected to LVDS0 differential data lane 3 negative</i>

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S139	I2C5_SCL(SPDIF_TX)	SPDIF_TX/ AE18	O, 1.8V CMOS/ 4.7K PU	I2C CLK for Display and Touch
S140	I2C5_SDA(SPDIF_RX)	SPDIF_RX/ AD18	IO, 1.8V CMOS/ 4.7K PU	I2C DATA for Display and Touch
S141	PWM1_OUT(I2C4_SDA)	I2C4_SDA/ AD8	O, 1.8V CMOS	LCD0 Back Light Brightness control PWM

Note: Contact iWave support team if LVDS0 supported SOM is required or refer Application note: "TBD"

2.7.11 Audio Interface

The i.MX 8M Plus SMARC SOM supports I2S0 and I2S1 channels of SMARC Edge connector from SoC's SAI2 and SAI3 channels respectively. The SAI peripheral provides a synchronous audio interface that supports full duplex serial interfaces with frame synchronization such as I2S, AC97 and other audio CODEC/DSP interfaces. The SAI general features are including Transmitter section with independent bit clock and frame sync, Maximum frame size of 32 words, Word size from 8-bits to 32-bits and supports 49.152 MHz BCLK. Only Transmitter Clock and Transmitter Left-Right Clock (LRCK) is supported as per SMARC specification.

In i.MX 8M Plus SMARC SOM the transmitter is configured for asynchronous mode and the receiver is configured for synchronous mode, hence both transmitter and receiver will use the transmitter bit clock and frame sync.

For more details on SMARC Edge SD pinouts on SMARC Edge connector, refer below table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S38	SAI2_MCLK	SAI2_MCLK/ AJ15	O, 1.8V CMOS	Master Clock for Audio codec
S39	SAI2_TX_SYNC(SAI2_TXFS)	SAI2_TXFS/ AJ17	O, 1.8V CMOS	Serial Audio Interface Channel1 Frame Sync /Left Right Clock
S40	SAI2_TX_DATA0(SAI2_TXD0)	SAI2_TXD0/ AH16	O, 1.8V CMOS	Serial Audio Interface Channel1 Data Output
S41	SAI2_RX_DATA0(SAI2_RXD0)	SAI2_RXD0/ AJ14	I, 1.8V CMOS	Serial Audio Interface Channel1 Data Input
S42	SAI2_TX_BCLK(SAI2_TXC)	SAI2_TXC/ AH15	O, 1.8V CMOS/ 33E Series	Serial Audio Interface Channel1 Clock
S50	SAI3_TX_SYNC(SAI3_TXFS)	SAI3_TXFS/ AC16	O, 1.8V CMOS	Serial Audio Interface Channel0 Left Right Clock
S51	SAI3_TX_DATA0(SAI3_TXD)	SAI3_TXD/ AH18	O, 1.8V CMOS	Serial Audio Interface Channel0 Data Output
S52	SAI3_RX_DATA0(NAND_DATA00)	NAND_DATA00/ R25	I, 1.8V CMOS	Serial Audio Interface Channel0 Data Input
S53	SAI3_TX_BCLK(SAI3_TXC)	SAI3_TXC/ AH19	O, 1.8V CMOS/ 33E Series	Serial Audio Interface Channel0 Clock

2.7.12 SPI Interface

The i.MX 8M Plus SoC supports enhanced Configurable Serial Peripheral Interface (ECSPI) module that supports an efficient interface to an SPI bus as a master and/or a slave with maximum data rate of 52 Mbits/s. The i.MX 8M Plus SMARC SOM supports SPI0 and SPI1 channels of the SMARC Edge connector using ECSPI1 and ECSPI2 of SoC.

For more details on SPI pinouts, refer below table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P43	ECSPI1_SS0	ECSPI1_SS0/ AE20	O, 1.8V CMOS	SPI0 Chip Select 0
P44	ECSPI1_SCLK	ECSPI1_SCLK/ AF20	O, 1.8V CMOS/ 33E Series	SPI0 Clock
P45	ECSPI1_MISO	ECSPI1_MISO/ AD20	I, 1.8V CMOS	SPI0 Master IN Slave Out
P46	ECSPI1_MOSI	ECSPI1_MOSI/ AC20	O, 1.8V CMOS	SPI0 Master Out Slave In
P54	ECSPI2_SS0	ECSPI2_SS0/ AJ22	O, 1.8V CMOS	SPI1 Chip Select 0
P56	ECSPI2_SCLK	ECSPI2_SCLK/ AH21	O, 1.8V CMOS/ 33E Series	SPI1 Clock
P57	ECSPI2_MISO (I2C4_SCL)	I2C4_SCL/ AF8	I, 1.8V CMOS	SPI1 Master IN Slave Out
P58	ECSPI2_MOSI	ECSPI2_MOSI/ AJ21	O, 1.8V CMOS	SPI1 Master Out Slave In

2.7.13 Data UART

SMARC V2.1.1 supports four UART channels where two channels SER0 & SER2 are with CTS and RTS and two channels SER1 & SER3 are without. The i.MX 8M Plus SoC's UART2 and UART3 connected SER0 and SER1 channels of SMARC Edge connector respectively. Whereas SER2 channel of SMARC Edge connector optionally connected to UART1 of i.MX 8M Plus SoC. In default configuration UART1 is connected to on SOM Bluetooth module. SER1 of the SMARC Edge connector is optionally connected to the on SOM GNSS Module. SER0, SER1 & SER2 can be used for any data commination. UART4 of the SoC is connected to SER3 channel of SMARC Edge connector and used as Debug UART.

For more details on UART pinouts, refer below table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P129	UART2_TXD	UART2_TXD/ AH4	O, 1.8V CMOS	UART2 Transmitter.
P130	UART2_RXD	UART2_RXD/ AF6	I, 1.8V CMOS	UART2 Receiver.
P131	UART2_CTS_B(SAI3_RXC)	SAI3_RXC/ AJ18	O, 1.8V CMOS	UART2 Request to Send.
P132	UART2_RTS_B(SAI3_RXD)	SAI3_RXD/ AF18	I, 1.8V CMOS	UART2 Clear to Send.

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P134	UART3_TXD	NAND_CE0_B/ L26	O, 1.8V CMOS	UART3 Transmitter.
P135	UART3_RXD	NAND_ALE/ N25	I, 1.8V CMOS	UART3 Receiver.
P136	NC	UART1_TXD/ AJ3	O, 1.8V CMOS	NC. <i>Note: Optionally connect to UART1_TX. By default, connected to on SOM Bluetooth module.</i>
P137	NC	UART1_RXD/ AD6	I, 1.8V CMOS	NC. <i>Note: Optionally connect to UART1_RX. By default, connected to on SOM Bluetooth module.</i>
P138	NC	UART3_RXD/ AE6	O, 1.8V CMOS	NC. <i>Note: Optionally connect to UART1_CTS_B. By default, connected to on SOM Bluetooth module.</i>
P139	NC	UART3_TXD/ AJ4	I, 1.8V CMOS	NC. <i>Note: Optionally connect to UART1_RTS_B. By default, connected to on SOM Bluetooth module.</i>
P140	UART4_TX	UART4_TXD/ AH5	O, 1.8V CMOS	Debug UART Transmitter. <i>Note: Optionally connected to on SOM Debug Header.</i>
P141	UART4_RX	UART4_RXD/ AJ5	I, 1.8V CMOS	Debug UART Receiver. <i>Note: Optionally connected to on SOM Debug Header.</i>

2.7.14 SMARC GPIOs

SMARC V2.1.1 supports 14 GPIOs, which can be used for any general-purpose application and are listed below. But, if extra GPIO are required then refer “i.MX 8M Plus Pin Multiplexing on SMARC Edge” table, which gives all optional GPIO supported via Edge connector.

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P108	SMARC_GPIO_0_GPIO4_18	SAI1_TXD6/AC12	IO, 1.8V CMOS	SMARC General Purpose Input/output 0.
P109	SMARC_GPIO_1_GPIO4_19	SAI1_TXD7/AJ13	IO, 1.8V CMOS	SMARC General Purpose Input/output 1.
P110	SMARC_GPIO_2_GPIO4_0	SAI1_RXFS/AJ9	IO, 1.8V CMOS	SMARC General Purpose Input/output 2.
P111	SMARC_GPIO_3_GPIO4_1	SAI1_RXC/AH8	IO, 1.8V CMOS	SMARC General Purpose Input/output 3.
P112	SMARC_GPIO_4_GPIO4_2	SAI1_RXD0/AC10	IO, 1.8V CMOS	SMARC General Purpose Input/output 4.
P113	SMARC_GPIO_5_GPIO3_20	SAI5_RXC/AD14	IO, 1.8V CMOS	SMARC General Purpose Input/output 5.

P114	SMARC_GPIO_6_GPIO4_22	SAI2_RXC/AJ16	IO, 1.8V CMOS	SMARC General Purpose Input/output 6.
P115	SMARC_GPIO_7_GPIO4_21	SAI2_RXFS/AH17	IO, 1.8V CMOS	SMARC General Purpose Input/output 7.
P116	SMARC_GPIO_8_GPIO4_28	SAI3_RXFS/AJ19	IO, 1.8V CMOS	SMARC General Purpose Input/output 8.
P117	SMARC_GPIO_9_GPIO4_3	SAI1_RXD1/AF10	IO, 1.8V CMOS	SMARC General Purpose Input/output 9.
P118	SMARC_GPIO_10_GPIO3_21	SAI5_RXFS/AC14	IO, 1.8V CMOS	SMARC General Purpose Input/output 10.
P119	SMARC_GPIO_11_GPIO5_5	SPDIF_EXT_CLK/AC18	IO, 1.8V CMOS	SMARC General Purpose Input/output 11.
S123	NC	HDMI_CEC/AD22	IO, 1.8V CMOS	NC (Optionally SMARC General Purpose Input/output 13).
S142	NC	NAND_DQS/R26	IO, 1.8V CMOS	NC (Optionally SMARC General Purpose Input/output 12).

2.7.15 CAN Interface

The Flexible Controller Area Network (FLEXCAN) module is a communication controller implementing the CAN protocol according to the ISO 11898-1 standard and CAN 2.0B protocol specifications.

The CAN protocol was primarily designed to be used as a vehicle serial data bus meeting the specific requirements of this field: real-time processing, reliable operation in the EMI environment of a vehicle, cost-effectiveness and required bandwidth. The FLEXCAN module is a full implementation of the CAN protocol specification, which supports both standard and extended message frames. 64 Message Buffers are supported by the FlexCAN module.

The i.MX 8M Plus SOC Supports two CAN interface and are connected to SMARC Edge Connector.

For more details of CAN pinouts on SMARC Edge connector, refer below table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P143	FLEXCAN1_TX(SAI5_RXD1)	SAI5_RXD1/AD16	O, 1.8V CMOS	CAN 1 Transmitter.
P144	FLEXCAN1_RX(SAI5_RXD2)	SAI5_RXD2/AF16	I, 1.8V CMOS	CAN 1 Receiver.
P145	FLEXCAN2_TX(SAI5_RXD3)	SAI5_RXD3/AE14	O, 1.8V CMOS	CAN 2 Transmitter.
P146	FLEXCAN2_RX(SAI5_MCLK)	SAI5_MCLK/AF14	I, 1.8V CMOS	CAN 2 Receiver.

2.7.16 I2C Interface

SMARC Specification V2.1.1 supports Five I2C but i.MX 8M Plus SOM supports only four I2C in default configuration and fifth I2C as optional which are listed down:

For more details of I2C pinouts on SMARC Edge connector, refer below table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S1	I2C5_SCL(SPDIF_TX)	SPDIF_TX/ AE18	O, 1.8V CMOS 4.7K PU	Secondary Camera Purpose I2C Clock.
S2	I2C5_SDA(SPDIF_RX)	SPDIF_RX/ AD18	IO, 1.8V CMOS 4.7K PU	Secondary Camera Purpose I2C Data.
S5	I2C3_SCL	I2C3_SCL/ AJ7	O, 1.8V CMOS 4.7K PU	Primary Camera Purpose I2C Clock.
S7	I2C3_SDA	I2C3_SDA/ AJ6	IO, 1.8V CMOS 4.7K PU	Primary Camera Purpose I2C Clock.
S48	I2C2_SCL	I2C2_SCL/ AH6	O, 1.8V CMOS 4.7K PU	General Purpose I2C Clock.
S49	I2C2_SDA	I2C2_SDA/ AE8	IO, 1.8V CMOS 4.7K PU	General Purpose I2C Data.
S139	I2C5_SCL(SPDIF_TX)	SPDIF_TX/ AE18	O, 1.8V CMOS 4.7K PU	Display Purpose I2C Clock.
S140	I2C5_SDA(SPDIF_RX)	SPDIF_RX/ AD18	IO, 1.8V CMOS 4.7K PU	Display Purpose I2C Clock.
P121	NC (I2C1_SCL)	I2C1_SCL/ AC8	O, 1.8V CMOS 4.7K PU	NC. <i>Note: Optionally connected to I2C1_SCL-PMIC I2C</i>
P122	NC (I2C1_SDA)	I2C1_SDA/ AH7	IO, 1.8V CMOS 4.7K PU	NC. <i>Note: Optionally connected to I2C1_SDA-PMIC I2C</i>

2.7.17 Control Signals

SMARC V2.1.1 specification supports control Signals, for more details on SMARC Control Signals pinouts on SMARC Edge connector, refer below table:

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P126	GPIO_RESET_OUT_GPIO1_9_1V8	GPIO1_IO08/ A8	I, 1.8V CMOS	RESET OUT from SoC to all other peripherals.
P127	PMIC_RST_B	NA	I, 1.8V CMOS 100K PU	Hard RESET Input to SOM.
P128	CPU_ON_OFF	ONOFF/ G22	I, 1.8V CMOS 100K PU	Power ON /OFF Input to SOM.
S150	VIN_PWR_BAD#	NA	I, 5V CMOS 10K PU	Power bad indication from Carrier board. Module and Carrier Board power supplies shall not be enabled while this signal is held low by the Carrier.

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
S153	CARRIER_STBY#	NA	O, 1.8V CMOS	Carrier Board power should be enabled only after CARRIER_STBY# goes High.
S154	CARRIER_PWR_ON	NA	O, 1.8V CMOS 10K PU	Carrier Board power should be enabled only after CARRIER_PWR_ON goes High.
S157	TEST#	NA	I, 1.8V CMOS	Not supported. <i>Note: This pin is connected to GND in SOM.</i>

2.7.18 Boot Select

The i.MX 8M Plus SMARC SOM supports three Boot Select pins as per SMARC V2.1.1 specification. i.MX 8M Plus SMARC SOM supports booting from On-SOM eMMC, SMARC SD (from carrier board) and eCSPI. Any of these boot media can be selected by properly setting the Boot Select Pins status from the carrier board as mentioned below.

Boot Select Pins			Description
BOOT_SEL2#	BOOT_SEL1#	BOOT_SEL0#	
Float	Float	GND	eMMC Flash (uSDHC3)
GND	GND	Float	SMARC SD (uSDHC2)
GND	Float	GND	eCSPI

Also, i.MX 8M Plus SMARC SOM supports active low FORCE_RECOV# functionality as per SMARC V2.1.1 specification. By pulling low on this pin puts i.MX 8M Plus SoC in serial download mode where the SoC boot media can be programmed through i.MX 8M Plus SoC's USB1 controller USB 3.0 interface which is connected to USB3 port of SMARC PCB Edge connector.

SMARC Pin No.	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P123	BOOT_SEL0#	NA	I, 1.8V CMOS 10K PU	Boot Media Select bit 0
P124	BOOT_SEL1#	NA	I, 1.8V CMOS 10K PU	Boot Media Select bit 1
P125	BOOT_SEL2#	NA	I, 1.8V CMOS 10K PU	Boot Media Select bit 2
S155	FORCE_RECOV#	NA	I, 1.8V CMOS 10K PU	Active low Force Recovery Input.

2.7.19 Power and GND

The i.MX 8M Plus SMARC SOM works with 5V power input (VCC) from SMARC PCB Edge Connector and generates all other required powers internally On-SOM itself. i.MX 8M Plus SMARC SOM also supports coin cell power input (VDD_RTC) from SMARC PCB Edge Connector to On-SOM RTC controller for real time clock.

For more details on Power & GND Signals pinouts on SMARC PCB Edge connector, refer the below table.

SMARC Pin No.	SMARC Edge Pin Name	SMARC Edge Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
P147, P148, P149, P150, P151, P152, P153, P154, P155, P156	VDD_IN	VDD_IN	NA	I, 5V Power	Supply Voltage.
P2, P9, P12, P15, P18, P32, P38, P47, P50, P53, P59, P68, P79, P82, P85, P88, P91, P94, P97, P100, P103, P120, P133, P142, S3, S10, S13, S16, S25, S34, S47, S61, S64, S67, S70, S73, S80, S83, S86, S89, S92, S101, S110, S119, S124, S130, S136, S143, S158	GND	GND	NA	Power	Ground.
S147	VDD_RTC	VDD_RTC	NA	I, 3V Power	3V coin cell input for RTC.

2.8 Other Features

2.8.1 Fan Header

The i.MX 8M Plus SMARC SOM supports a Fan Header to connect cooling Fan if required. This Fan Header (J3) is physically located at the top of the board as shown below.

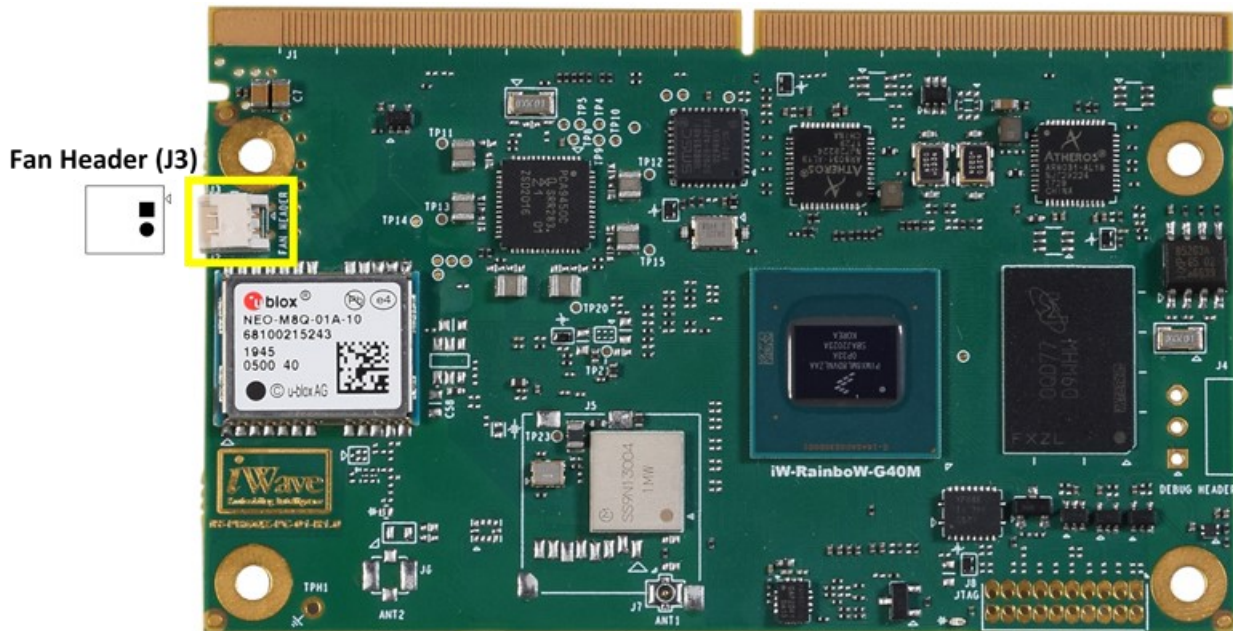


Figure 5: Fan Header

Number of Pins	- 2
Connector Part	- 53048-0210 from Molex
Mating Connector	- 51021-0200 from Molex

Table 4: FAN Header Pin Assignment

Pin No	Signal Name	Signal Type/ Termination	Description
1	VCC_5V	O, Power	+5V Power output to FAN.
2	GND	Power	Ground.

2.8.2 MIPI CSI Camera Connector (Optional)

The i.MX 8M Plus SoC supports two 4-lane camera interfaces, the CSI-2 Rx Controller Core is compliant to MIPI CSI2 Specification V1.3 except for C-PHY feature and implements all three layers defined by the CSI-2 Specification: Pixel to Byte Packing, Low Level Protocol, and Lane Management. The D-PHY interface of the CSI-2 Rx Controller Core supports PHY Protocol Interface (PPI) compatible MIPI D-PHYs. The Local Interface is an easy-to-use pixel-based interface that supports 1 to 4 virtual channels and all data types. The Local interface runs at the User Interface clock rate for all implementations. The CSI-2 Rx Controller Core takes care of all packet formatting details and transmission over the MIPI bus. The i.MX 8M Plus SoC also supports 2 x ISP for providing aggregate performance and HDR processing.

As the MIPI CSI0 interface of SMARC Edge only supports 2 lane MIPI CSI, so an optional 40 pin MIPI-CSI connector is supported on SOM supporting all 4 lanes of MIPI CSI1 controller of i.MX 8M Plus SoC.

Number of Pins : 36

Connector Part : FH12A-36S-0.5SH(55)

For more details on MIPI CSI1 pinouts on MIPI CSI Camera connector, refer below table:

Pin No	Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
1	VDD_3V3	NA	Power	3V3 Camera Power
2	VDD_3V3	NA	Power	3V3 Camera Power
3	MIPI_CSI1_D0_P	MIPI_CSI1_D0_P/ D18	I, MIPI	MIPI CSI1 differential data lane 0 positive.
4	MIPI_CSI1_D0_N	MIPI_CSI1_D0_N/ E18	I, MIPI	MIPI CSI1 differential data lane 0 negative.
5	GND	NA	Power	Ground.
6	MIPI_CSI1_D1_P	MIPI_CSI1_D1_P/ D20	I, MIPI	MIPI CSI1 differential data lane 1 positive.
7	MIPI_CSI1_D1_N	MIPI_CSI1_D1_N/ E20	I, MIPI	MIPI CSI1 differential data lane 1 negative.
8	GND	NA	Power	Ground.
9	MIPI_CSI1_D2_P	MIPI_CSI1_D2_P/ D24	I, MIPI	MIPI CSI1 differential data lane 2 positive.
10	MIPI_CSI1_D2_N	MIPI_CSI1_D2_N/ E24	I, MIPI	MIPI CSI1 differential data lane 2 negative.
11	SMARC_GPIO_4_GPIO4_2	SAI1_RXD0/AC10	IO, 1.8V CMOS	MIPI Camera Reset signal
12	MIPI_CSI1_D3_P	MIPI_CSI1_D3_P/ D26	I, MIPI	MIPI CSI1 differential data lane 3 positive.
13	MIPI_CSI1_D3_N	MIPI_CSI1_D3_N/ E26	I, MIPI	MIPI CSI1 differential data lane 3 negative.
14	GND	NA	Power	Ground.

Pin No	Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
15	MIPI_CSI1_CLK_P	MIPI_CSI1_CLK_P/ BF20	I, MIPI	MIPI CSI1 differential Clock positive.
16	MIPI_CSI1_CLK_N	MIPI_CSI1_CLK_N/ BE21	I, MIPI	MIPI CSI1 differential Clock negative.
17	GND	NA	Power	Ground.
18	I2C3_SCL	I2C3_SCL/ AJ7	O, 1.8V CMOS/ 4.7K PU	I2C Clock for MIPI CSI1 Camera
19	I2C3_SDA	I2C3_SDA/ AJ6	IO, 1.8V CMOS/ 4.7K PU	I2C Data for MIPI CSI1 Camera
20	SMARC_GPIO_0_GPIO4_18	SAI1_TXD6/AC12	IO, 1.8V CMOS	Camera 0 Enable (active low).
21	CAMERA_CCMCLKO1 (ECSPi2_MISO)	I2C4_SCL/ AF8	O, 1.8V CMOS	Master Clock for Camera
22	NC	NA	-	-
23	NC	NA	-	-
24	NC	NA	-	-
25	GND	NA	Power	Ground.
26	CKOUT1	CKOUT1/ K29	O, 1.8V CMOS	Clock Out from SoC.
27	CKOUT2	CKOUT2/ L29	O, 1.8V CMOS	Clock Out from SoC.
28	GND	NA	Power	Ground.
29	CLKIN1	CLKIN1/ K28	I, 1.8V CMOS	Clock In to SoC.
30	CLKIN2	CLKIN2/ L28	I, 1.8V CMOS	Clock In to SoC.
31	NC	NA	-	-
32	NC	NA	-	-
33	NC	NA	-	-
34	GND	NA	Power	Ground.
35	CAM0_GPIO	GPIO1_IO03/ D6	IO, 1.8V CMOS	GPIO for MIPI CSI1 Camera.
36	NC	NA	-	-

2.8.3 Debug UART Header (Optional)

The i.MX 8M Plus SMARC SOM optionally supports 3pin UART header for i.MX 8M Plus SoC's debug purpose. The i.MX 8M Plus SoC's UART4 can be connected to this header. FTDI's UART to USB smart cable (*TTL-232RG-VREG1V8*) can be directly connected between this header and Host PC for debugging. This UART header (J4) is physically located on topside of the SOM. This is the optional feature and not populated by default.

Number of Pins - 3

Connector Part - M20-9960345 from Harwin Inc.

Table 5: Debug UART Header Pin Assignment

Pin No	Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
1	UART4_TXD_CONN	UART4_TXD/AH5	O, 1.8V CMOS	Debug UART Transmitter
2	UART4_RXD_CONN	UART4_RXD/AJ5	I, 1.8V CMOS	Debug UART Receiver
3	GND	NA	Power	Ground

2.8.4 JTAG Header (Optional)

The i.MX 8M Plus SMARC SOM optionally supports JTAG interface for SoC debug purpose. A customized 20-pin ARM JTAG connector (J8) is available in SOM for JTAG interface. The i.MX 8M Plus SoC's JTAG pins are 1.8V tolerant and so 1.8V reference power is provided to pin1 of the connector to allow JTAG tool to automatically configure the logic signals for the right voltage. JTAG connector (J8) is physically located on topside of the SOM. This is the optional feature and not populated by default.

Number of Pins - 20

Connector Part - GRPB102MWCN-RC from Sullins Connector Solutions

Mating Connector - LPPB102CFFN-RC from Sullins Connector Solutions

Table 6: JTAG Header Pin Assignment

Pin No	Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
1	VDD_1V8	NA	O, 1.8V Power	VTREF Voltage Reference.
2	VFRE_JTAG1	NA	O, 1.8V Power	Supply Voltage.
3	-	NA	O, 1.8V CMOS/ 10K PU	Only pull up is provided.
4	GND	NA	Power	Ground.
5	JTAG_TDI	JTAG_TDI/ G16	I, 1.8V CMOS/ 10K PU	JTAG test data input.
6	GND	NA	Power	Ground.
7	JTAG_TMS	JTAG_TMS/ G14	I, 1.8V CMOS/ 10K PD	JTAG test mode select.
8	GND	NA	Power	Ground.
9	JTAG_TCK	JTAG_TCK/ G18	I, 1.8V CMOS/ 10K PU/PD	JTAG test Clock.
10	GND	NA	Power	Ground.
11	-	NA	-	Only pull down is provided.
12	GND	NA	Power	Ground.

Pin No	Signal Name	SoC Ball Name/ Pin Number	Signal Type/ Termination	Description
13	JTAG_TDO	JTAG_TDO/ F14	O, 1.8V CMOS, 10K PU	JTAG test data output.
14	GND	NA	Power	Ground.
15	-	NA	O, 1.8V CMOS/ 10K PU	Only pull up is provided.
16	GND	NA	Power	Ground.
17	-	NA	-	Only pull up is provided.
18	GND	NA	Power	Ground.
19	-	NA	-	Only pull down is provided.
20	GND	NA	Power	Ground.

2.9 i.MX 8M Plus Pin Multiplexing on SMARC Edge

The i.MX 8M Plus SoC IO pins have many alternate functions and can be configured to any one of the alternate functions based on the requirement, also most of the i.MX 8M Plus SoC's IO pins can be configured as GPIO if required. The below table provides the details of i.MX 8M Plus SoC pin connections to the SMARC edge connector and with selected pin function highlighted and available alternate functions. This table has been prepared by referring NXP's i.MX 8M Plus Hardware User's Manual.

Important Note: It is strongly recommended to use the pin function same as selected in the SMARC SOM Edge connector for iWave's BSP reusability and to have compatible SMARC modules in future for upgradability.

Table 7: i.MX 8M Plus SoC IOMUX for SMARC Edge Connector interfaces

Interface/ Function	SMARC Edge Pin Number	i.MX 8M Plus SoC Pin Number	Function 0	Function 1	Function 2	Function 3	Function 4	Function 5	Function 6	Default
MIPI CSI0	S9	E22	MIPI_CSI1_CLK_N							MIPI_CSI1_CLK_N
	S8	D22	MIPI_CSI1_CLK_P							MIPI_CSI1_CLK_P
	S12	E18	MIPI_CSI1_D0_N							MIPI_CSI1_D0_N
	S11	D18	MIPI_CSI1_D0_P							MIPI_CSI1_D0_P
	S15	E20	MIPI_CSI1_D1_N							MIPI_CSI1_D1_N
	S14	D20	MIPI_CSI1_D1_P							MIPI_CSI1_D1_P
	S6	AH20	ECSPI2_MISO	UART4_CTS_B	I2C4_SCL	SAI7_MCLK	CCM_CLKO1	GPIO5_IO12		CCM_CLKO1
	S5	AJ7	I2C3_SCL	PWM4_OUT	GPT2_CLK	ECSPI2_SCLK		GPIO5_IO18		I2C3_SCL
	S7	AJ6	I2C3_SDA	PWM3_OUT	GPT3_CLK	ECSPI2_MOSI		GPIO5_IO19		I2C3_SDA
MIPI CSI1	P4	B23	MIPI_CSI2_CLK_N							MIPI_CSI2_CLK_N

i.MX 8M Plus SMARC SOM Hardware User Guide

Interface/ Function	SMARC Edge Pin Number	i.MX 8M Plus SoC Pin Number	Function 0	Function 1	Function 2	Function 3	Function 4	Function 5	Function 6	Default
	P3	A23	MIPI_CSI2_CLK_P							MIPI_CSI2_CLK_P
	P8	B25	MIPI_CSI2_D0_N							MIPI_CSI2_D0_N
	P7	A25	MIPI_CSI2_D0_P							MIPI_CSI2_D0_P
	P11	B24	MIPI_CSI2_D1_N							MIPI_CSI2_D1_N
	P10	A24	MIPI_CSI2_D1_P							MIPI_CSI2_D1_P
	P14	B22	MIPI_CSI2_D2_N							MIPI_CSI2_D2_N
	P13	A22	MIPI_CSI2_D2_P							MIPI_CSI2_D2_P
	P17	B21	MIPI_CSI2_D3_N							MIPI_CSI2_D3_N
	P16	A21	MIPI_CSI2_D3_P							MIPI_CSI2_D3_P
	S1	AE18	SPDIF1_OUT	PWM3_OUT	I2C5_SCL	GPT1_COMP ARE1	FLEXCAN1_T X	GPIO5_IO3		I2C5_SCL
	S2	AD18	SPDIF1_IN	PWM2_OUT	I2C5_SDA	GPT1_COMP ARE2	FLEXCAN1_R X	GPIO5_IO4		I2C5_SDA
MIPI DSI0	S135	B18	MIPI_DSI1_CLK_N							MIPI_DSI1_CLK_N
	S134	A18	MIPI_DSI1_CLK_P							MIPI_DSI1_CLK_P
	S126	B16	MIPI_DSI1_D0_N							MIPI_DSI1_D0_N
	S125	A16	MIPI_DSI1_D0_P							MIPI_DSI1_D0_P
	S129	B17	MIPI_DSI1_D1_N							MIPI_DSI1_D1_N

i.MX 8M Plus SMARC SOM Hardware User Guide

Interface/ Function	SMARC Edge Pin Number	i.MX 8M Plus SoC Pin Number	Function 0	Function 1	Function 2	Function 3	Function 4	Function 5	Function 6	Default
	S128	A17	MIPI_DSI1_D1_P							MIPI_DSI1_D1_P
	S132	B19	MIPI_DSI1_D2_N							MIPI_DSI1_D2_N
	S131	A19	MIPI_DSI1_D2_P							MIPI_DSI1_D2_P
	S138	B20	MIPI_DSI1_D3_N							MIPI_DSI1_D3_N
	S137	A20	MIPI_DSI1_D3_P							MIPI_DSI1_D3_P
	S139	AE18	SPDIF1_OUT	PWM3_OUT	I2C5_SCL	GPT1_COMP ARE1	FLEXCAN1_T X	GPIO5_IO3		I2C5_SCL
	S140	AD18	SPDIF1_IN	PWM2_OUT	I2C5_SDA	GPT1_COMP ARE2	FLEXCAN1_R X	GPIO5_IO4		I2C5_SDA
	S141	AD8	I2C4_SDA	PWM1_OUT		ECSP12_SS0		GPIO5_IO21		PWM1_OUT
	S127	L25	NAND_DATA01	QSPI_A_DAT A1	SAI3_TX_SY NC	ISP_PRELIGH T_TRIG_0	UART4_TX	GPIO3_IO7	CORESIGHT_ TRACE05	GPIO3_IO7
	S133	L24	NAND_DATA02	QSPI_A_DAT A2	USDHC3_CD _B	UART4_CTS_ B		GPIO3_IO8	CORESIGHT_ TRACE06	GPIO3_IO8
LVDS1	S109	B28	LVDS1_CLK_N							LVDS1_CLK_N
	S108	A28	LVDS1_CLK_P							LVDS1_CLK_P
	S112	B26	LVDS1_D0_N							LVDS1_D0_N
	S111	A26	LVDS1_D0_P							LVDS1_D0_P
	S115	B27	LVDS1_D1_N							LVDS1_D1_N
	S114	A27	LVDS1_D1_P							LVDS1_D1_P
	S118	C28	LVDS1_D2_N							LVDS1_D2_N
	S117	B29	LVDS1_D2_P							LVDS1_D2_P
	S121	D28	LVDS1_D3_N							LVDS1_D3_N
	S120	C29	LVDS1_D3_P							LVDS1_D3_P
	S122	AE16	SAI5_RX_DATA0	SAI1_TX_DA TA2	PWM2_OUT	I2C5_SCL	PDM_BIT_ST REAM0	GPIO3_IO21		PWM2_OUT
	S107	R26	NAND_DQS	QSPI_A_DQS	SAI3_MCLK	ISP_SHUTTE R_OPEN_0		GPIO3_IO14		GPIO3_IO14

i.MX 8M Plus SMARC SOM Hardware User Guide

Interface/ Function	SMARC Edge Pin Number	i.MX 8M Plus SoC Pin Number	Function 0	Function 1	Function 2	Function 3	Function 4	Function 5	Function 6	Default
	S116	AD22	HDMI_CEC			I2C6_SCL	FLEXCAN2_T X	GPIO3_IO28		GPIO3_IO28
HDMI	P102	AJ24	HDMI_TXC_N							HDMI_TXC_N
	P101	AH24	HDMI_TXC_P							HDMI_TXC_P
	P99	AJ25	HDMI_TX0_N							HDMI_TX0_N
	P98	AH25	HDMI_TX0_P							HDMI_TX0_P
	P96	AJ26	HDMI_TX1_N							HDMI_TX1_N
	P95	AH26	HDMI_TX1_P							HDMI_TX1_P
	P93	AJ27	HDMI_TX2_N							HDMI_TX2_N
	P92	AH27	HDMI_TX2_P							HDMI_TX2_P
	P104	AE22	HDMI_HPD	HDMI_HPD_ O		I2C6_SDA	FLEXCAN2_R X	GPIO3_IO29		HDMI_HPD
	P105	AC22	HDMI_SCL			I2C5_SCL	FLEXCAN1_T X	GPIO3_IO26		HDMI_SCL
	P106	AF22	HDMI_SDA			I2C5_SDA	FLEXCAN1_R X	GPIO3_IO27		HDMI_SDA
SD Interface	P36	AB29	USDHC2_CLK		ECSPI2_SCLK	UART4_RX		GPIO2_IO13		USDHC2_CLK
	P34	AB28	USDHC2_CMD		ECSPI2_MOS I	UART4_TX	PDM_CLK	GPIO2_IO14		USDHC2_CMD
	P39	AC28	USDHC2_DATA0		I2C4_SDA	UART2_RX	PDM_BIT_ST REAM0	GPIO2_IO15		USDHC2_DATA0
	P40	AC29	USDHC2_DATA1		I2C4_SCL	UART2_TX	PDM_BIT_ST REAM1	GPIO2_IO16		USDHC2_DATA1
	P41	AA26	USDHC2_DATA2		ECSPI2_SS0	SPDIF1_OUT	PDM_BIT_ST REAM2	GPIO2_IO17		USDHC2_DATA2
	P42	AA25	USDHC2_DATA3		ECSPI2_MIS O	SPDIF1_IN	PDM_BIT_ST REAM3	GPIO2_IO18	SRC_EARLY_ RESET	USDHC2_DATA3
	P37	AD28	USDHC2_RESET _B					GPIO2_IO19	SRC_SYSTEM_ RESET	GPIO2_IO19
	P33	AC26	USDHC2_WP					GPIO2_IO20	CORESIGHT_ EVENTI	GPIO2_IO20
	P35	BK24	USDHC2_CD_B					GPIO2_IO1 2		USDHC2_CD_B

i.MX 8M Plus SMARC SOM Hardware User Guide

Interface/ Function	SMARC Edge Pin Number	i.MX 8M Plus SoC Pin Number	Function 0	Function 1	Function 2	Function 3	Function 4	Function 5	Function 6	Default
SPI1	P54	AJ22	ECSPI2_SS0	UART4_RTS_B	I2C4_SDA		CCM_CLKO2	GPIO5_IO13		ECSPI2_SS0
	P56	AH21	ECSPI2_SCLK	UART4_RX	I2C3_SCL	SAI7_TX_BCLK		GPIO5_IO10		ECSPI2_SCLK
	P57	AF8	I2C4_SCL	PWM2_OUT	PCIE_CLKREQ_B	ECSPI2_MISO		GPIO5_IO20		ECSPI2_MISO
	P58	AJ21	ECSPI2_MOSI	UART4_TX	I2C3_SDA	SAI7_TX_DATA0		GPIO5_IO11		ECSPI2_MOSI
SPIO	P43	AE20	ECSPI1_SS0	UART3_RTS_B	I2C2_SDA	SAI7_TX_SYNC		GPIO5_IO9		ECSPI1_SS0
	P44	AF20	ECSPI1_SCLK	UART3_RX	I2C1_SCL	SAI7_RX_SYNC		GPIO5_IO6		ECSPI1_SCLK
	P45	AD20	ECSPI1_MISO	UART3_CTS_B	I2C2_SCL	SAI7_RX_DATA0		GPIO5_IO8		ECSPI1_MISO
	P46	AC20	ECSPI1_MOSI	UART3_TX	I2C1_SDA	SAI7_RX_BCLK		GPIO5_IO7		ECSPI1_MOSI
USB OTG1	P74	A6	GPIO1_IO13	USB1_OTG_OC				PWM2_OUT		GPIO1_IO13
	S104	B11	USB1_ID							USB1_ID
	S68	D10	USB1_D_P							USB1_D_P
	S69	E10	USB1_D_N							USB1_D_N
	S62	A10	USB1_TX_P							USB1_TX_P
	S63	B10	USB1_TX_N							USB1_TX_N
	S65	A9	USB1_RX_P							USB1_RX_P
	S66	B9	USB1_RX_N							USB1_RX_N
PCIe	P89	A15	PCIE_TXN_P							PCIE_TXN_P
	P90	B15	PCIE_TXN_N							PCIE_TXN_N
	P86	A14	PCIE_RXN_P							PCIE_RXN_P
	P87	B14	PCIE_RXN_N							PCIE_RXN_N
	S146	A4	GPIO1_IO14	USB2_OTG_PWR			USDHC3_CD_B	PWM3_OUT	CCM_CLKO1	GPIO1_IO14
	P75	A5	GPIO1_IO12	USB1_OTG_PWR				SDMA2_EXT_EVENT[1]		GPIO1_IO12

i.MX 8M Plus SMARC SOM Hardware User Guide

Interface/ Function	SMARC Edge Pin Number	i.MX 8M Plus SoC Pin Number	Function 0	Function 1	Function 2	Function 3	Function 4	Function 5	Function 6	Default
UART2	P130	AF6	UART2_RX	ECSPI3_MISO		GPT1_COMPARE3		GPIO5_IO24		UART2_RX
	P129	AH4	UART2_TX	ECSPI3_SSO		GPT1_COMPARE2		GPIO5_IO25		UART2_TX
	P132	AF18	SAI3_RX_DATA0	SAI2_RX_DATA3	SAI5_RX_DATA0		UART2_RTS_B	GPIO4_IO30	PDM_BIT_STREAM1	UART2_RTS_B
	P131	AJ18	SAI3_RX_BCLK	SAI2_RX_DATA2	SAI5_RX_BCLK	GPT1_CLK	UART2_CTS_B	GPIO4_IO29	PDM_CLK	UART2_CTS_B
UART1 (optional)	P136	AJ3	UART1_TX	ECSPI3_MOSI				GPIO5_IO23		UART1_TX
	P137	AD6	UART1_RX	ECSPI3_SCLK				GPIO5_IO22		UART1_RX
	P138	AE6	UART3_RX	UART1_CTS_B	USDHC3_RESET_B	GPT1_CAPTURE2	CAN2_TX	GPIO5_IO26		UART1_CTS_B
	P139	AJ4	UART3_TX	UART1_RTS_B	USDHC3_VSELECT	GPT1_CLK	CAN2_RX	GPIO5_IO27		UART1_RTS_B
UART3	P135	N25	NAND_ALE	QSPI_A_SCLK	SAI3_TX_BCLK	ISP_FL_TRIG_0	UART3_RX	GPIO3_IO0	CORESIGHT_TRACE_CLK	UART3_RX
	P134	L26	NAND_CE0_B	QSPI_A_SSO_B	SAI3_TX_DATA0	ISP_SHUTTER_TRIG_0	UART3_TX	GPIO3_IO1	CORESIGHT_TRACE_CTL	UART3_TX
UART4	P141	AJ5	UART4_RX	UART2_CTS_B	PCIE_CLKREQ_B	GPT1_COMPARE1	I2C6_SCL	GPIO5_IO28		UART4_RX
	P140	AH5	UART4_TX	UART2_RTS_B		GPT1_CAPTURE1	I2C6_SDA	GPIO5_IO29		UART4_TX
Audio SAI0	S51	AH18	SAI3_TX_DATA0	SAI2_TX_DATA3	SAI5_RX_DATA3	GPT1_CAPTURE2	SPDIF1_EXT_CLK	GPIO5_IO1		SAI3_TX_DATA0
	S52	R25	NAND_DATA00	QSPI_A_DATA0	SAI3_RX_DATA0	ISP_FLASH_TRIG_0	UART4_RX	GPIO3_IO6	CORESIGHT_TRACE04	SAI3_RX_DATA0
	S53	AH19	SAI3_TX_BCLK	SAI2_TX_DATA2	SAI5_RX_DATA2	GPT1_CAPTURE1	UART2_TX	GPIO5_IO0	PDM_BIT_STREAM2	SAI3_TX_BCLK
	S50	AC16	SAI3_TX_SYNC	SAI2_TX_DATA1	SAI5_RX_DATA1	SAI3_TX_DATA1	UART2_RX	GPIO4_IO31	PDM_BIT_STREAM3	SAI3_TX_SYNC

i.MX 8M Plus SMARC SOM Hardware User Guide

Interface/ Function	SMARC Edge Pin Number	i.MX 8M Plus SoC Pin Number	Function 0	Function 1	Function 2	Function 3	Function 4	Function 5	Function 6	Default
Audio SAI1	S41	AJ14	SAI2_RX_DATA0	SAI5_TX_DATA0	ENET_QOS_1588_EVENT2_OUT	SAI2_TX_DATA1	UART1_RTSB	GPIO4_IO23	PDM_BIT_STREAM3	SAI2_RX_DATA0
	S42	AH15	SAI2_TX_BCLK	SAI5_TX_DATA2		FLEXCAN1_RX		GPIO4_IO25	PDM_BIT_STREAM1	SAI2_TX_BCLK
	S40	AH16	SAI2_TX_DATA0	SAI5_TX_DATA3	ENET_QOS_1588_EVENT2_IN	FLEXCAN2_TX	ENET_QOS_1588_EVENT2_AUX_IN	GPIO4_IO26		SAI2_TX_DATA0
	S39	AJ17	SAI2_TX_SYNC	SAI5_TX_DATA1	ENET_QOS_1588_EVENT3_OUT	SAI2_TX_DATA1	UART1_CTSB	GPIO4_IO24	PDM_BIT_STREAM2	SAI2_TX_SYNC
	S38	AJ15	SAI2_MCLK	SAI5_MCLK	ENET_QOS_1588_EVENT3_IN	FLEXCAN2_RX	ENET_QOS_1588_EVENT3_AUX_IN	GPIO4_IO27	SAI3_MCLK	SAI2_MCLK
CAN	P143	AD16	SAI5_RX_DATA1	SAI1_TX_DATA3	SAI1_TX_SYNC	SAI5_TX_SYNC	PDM_BIT_STREAM1	GPIO3_IO22	FLEXCAN1_TX	FLEXCAN1_TX
	P144	AF16	SAI5_RX_DATA2	SAI1_TX_DATA4	SAI1_TX_SYNC	SAI5_TX_BCLK	PDM_BIT_STREAM2	GPIO3_IO23	FLEXCAN1_RX	FLEXCAN1_RX
	P145	AE14	SAI5_RX_DATA3	SAI1_TX_DATA5	SAI1_TX_SYNC	SAI5_TX_DATA0	PDM_BIT_STREAM3	GPIO3_IO24	FLEXCAN2_TX	FLEXCAN2_TX
	P146	AF14	SAI5_MCLK	SAI1_TX_BCLK	PWM1_OUT	I2C5_SDA		GPIO3_IO25	FLEXCAN2_RX	FLEXCAN2_RX
GPIO	P108	AC12	SAI1_TX_DATA6	SAI6_RX_SYNC	SAI6_TX_SYNC		ENET1_RX_ER	GPIO4_IO18		GPIO4_IO18
	P109	AJ13	SAI1_TX_DATA7	SAI6_MCLK		PDM_CLK	ENET1_TX_ER	GPIO4_IO19		GPIO4_IO19
	P110	AJ9	SAI1_RX_SYNC				ENET1_1588_EVENT0_IN	GPIO4_IO0		GPIO4_IO0
	P111	AH8	SAI1_RX_BCLK			PDM_CLK	ENET1_1588_EVENT0_OUT	GPIO4_IO1		GPIO4_IO1
	P112	AC10	SAI1_RX_DATA0		SAI1_TX_DATA1	PDM_BIT_STREAM0	ENET1_1588_EVENT1_IN	GPIO4_IO2		GPIO4_IO2

i.MX 8M Plus SMARC SOM Hardware User Guide

Interface/ Function	SMARC Edge Pin Number	i.MX 8M Plus SoC Pin Number	Function 0	Function 1	Function 2	Function 3	Function 4	Function 5	Function 6	Default
	P113	AD14	SAI5_RX_BCLK	SAI1_TX_DATA1	PWM3_OUT	I2C6_SDA	PDM_CLK	GPIO3_IO20		GPIO3_IO20
	P114	AJ16	SAI2_RX_BCLK	SAI5_TX_BCLK		FLEXCAN1_TX	UART1_RX	GPIO4_IO22	PDM_BIT_STREAM1	GPIO4_IO22
	P115	AH17	SAI2_RX_SYNC	SAI5_TX_SYNC	SAI5_TX_DATA1	SAI2_RX_DATA1	UART1_TX	GPIO4_IO21	PDM_BIT_STREAM2	GPIO4_IO21
	P116	AJ19	SAI3_RX_SYNC	SAI2_RX_DATA1	SAI5_RX_SYNC	SAI3_RX_DATA1	SPDIF1_IN	GPIO4_IO28	PDM_BIT_STREAM0	GPIO4_IO28
	P117	AF10	SAI1_RX_DATA1			PDM_BIT_STREAM1	ENET1_1588_EVENT1_OUTPUT	GPIO4_IO3		GPIO4_IO3
	P118	AC14	SAI5_RX_SYNC	SAI1_TX_DATA0	PWM4_OUT	I2C6_SCL		GPIO3_IO19		GPIO3_IO19
	P119	AC18	SPDIF1_EXT_CLK	PWM1_OUT		GPT1_COMPARE3		GPIO5_IO5		GPIO5_IO5
I2C	S48	AH6	I2C2_SCL	ENET_QOS_1588_EVENT1_IN	USDHC3_CD_B	ECSPI1_MISO	ENET_QOS_1588_EVENT1_AUX_IN	GPIO5_IO16		I2C2_SCL
	S49	AE8	I2C2_SDA	ENET_QOS_1588_EVENT1_OUT	USDHC3_WP	ECSPI1_SS0		GPIO5_IO17		I2C2_SDA
Control Signal	P126	B8	GPIO1_IO9	ENET_QOS_1588_EVENT0_OUTPWM2_OUT	PWM2_OUT	ISP_SHUTTER_OPEN_1	USDHC3_RESET_B	SDMA2_EXT_EVENT[0]		GPIO1_IO9
	S145	B6	GPIO1_IO2	WDOG1_WDOG_B		ISP_FLASH_TRIG_0		WDOG1_WDOG_ANY		WDOG1_WDOG_B

3. TECHNICAL SPECIFICATION

This section provides detailed information about the i.MX 8M Plus SMARC SOM technical specification with Electrical, Environmental and Mechanical characteristics.

3.1 Electrical Characteristics

The Module input power voltage is brought in on the ten VDD_IN pins and returned through the numerous GND pins on the connector. A Module will withstand an indefinite exposure to an applied VDD_IN that may vary over the 4.5V to 5.25V range, without damage, and it will operate over the entire VDD_IN range of 4.5V to 5.25V. Ten pins are allocated to VDD_IN. The connector pin current rating is 0.5A per pin. This works out to 5A total for the 10 pins.

3.1.1 Power Input Requirement

The below table provides the Power Input Requirement of i.MX 8M Plus SMARC SOM.

Table 8: Power Input Requirement

Sl. No.	Power Rail	Min (V)	Typical (V)	Max(V)	Max Input Ripple
1	VDD_IN ¹	4.5V ¹	5V	5.25V	±50mV
2	VDD_RTC ²	2.8V	3V	3.3V	±20mV

¹ i.MX 8M Plus SMARC SOM is designed to work with VDD_IN input power rail from SMARC PCB Edge connector only. VDD_IN can be as low as 3.0V with sufficient current if fan is not used.

² i.MX 8M Plus SMARC SOM use this voltage as backup power source to RTC controller when VDD_IN is off.

3.1.2 Power Input Sequencing

The i.MX 8M Plus SMARC SOM's Power Input sequence requirement is explained below.

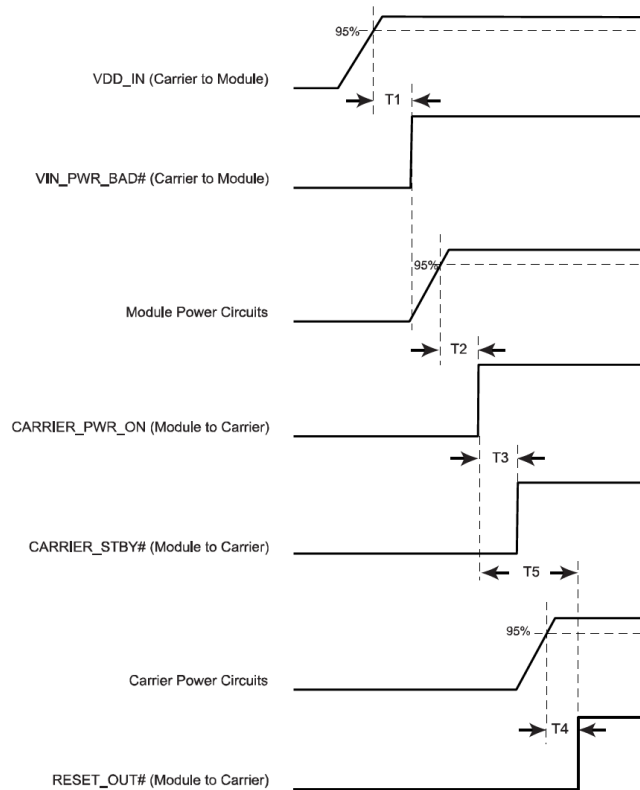


Figure 6: Power Input Sequencing

Table 9: Power Sequence Timing

Item	Description	Value
T1	VDD_IN rise time to VIN_PWR_BAD# rise time	≥ 0 ms
T2	VIN_PWR_BAD# rise time to SOM Power rise time	≥ 0 ms
T3	CARRIER_PWR_ON to CARRIER_STBY# timing	≥ 0 ms
T4	Carrier power circuits are up to RESET_OUT# rise	≥ 0 ms
T5	CARRIER_PWR_ON to CARRIER_RESET_OUT# timing	100 to 500ms

3.1.3 Power Consumption

Table 10: Power Consumption

Task/Status	Power Rail	Current Drawn/ Power Consumption
Run Mode Power Consumption¹		
Play Video run in MIPI display (Gstreamer)	VDD_IN	TBD
Play Video run in MIPI display (Gplay)	VDD_IN	TBD
Camera Streaming	VDD_IN	TBD
Play 4K Video run in HDMI display (Gplay)	VDD_IN	TBD
Play Audio	VDD_IN	TBD
Ping Bluetooth	VDD_IN	TBD
Ping Wi-Fi	VDD_IN	TBD
Ping Ethernet (Eth0 and Eth1)	VDD_IN	TBD
eMMC to Standard SD file transfer	VDD_IN	TBD
eMMC to USB3.0 file transfer	VDD_IN	TBD
eMMC to PCIe file transfer	VDD_IN	TBD
Bluetooth file transfer	VDD_IN	TBD
Wi-Fi file transfer	VDD_IN	TBD
Ethernet Streaming (Video Play)	VDD_IN	TBD
GPU Processor -Graphics 3D Test	VDD_IN	TBD
Dhrystone	VDD_IN	TBD
Maximum Power Test: - Run the below during Maximum Power Test, - Play Video run in MIPI display (Gplay) - Camera Streaming - Ethernet (eth0 & eth1) Run the ping (65500 packet size) - Wi-Fi- Run the ping test on back ground - FileTransfer - Transfer the 1GB files in storage devices - Run the dry2 application on back ground - GPU Processor -Graphics 3D Test	VDD_IN	TBD
Low Power Mode Power Consumption		
System Idle Mode.	VDD_IN	TBD
Deep Sleep Mode.	VDD_IN	TBD
RTC power when no VIN_3V3 supply is provided	VRTC_3V0	TBD

¹ Power consumption measurements are done in iWave's i.MX 8M Plus SoC based SMARC Development platform with iWave's TBD.

3.2 Environmental Characteristics

3.2.1 Environmental Specification

The below table provides the Environment specification of i.MX 8M Plus SMARC SOM.

Table 11: Environmental Specification

Parameters	Min	Max
Operating temperature range ^{1,2,3}	-40°C	85°C

¹ iWave guarantees the component selection for the given operating temperature. The operating temperature at the system level will be affected by the various system components like carrier board and its components, system enclosure, air circulation in the system, system power supply etc. Based on the system design, specific heat dissipating approach might be required from system to system. It is recommended to do the necessary system level thermal simulation and find necessary thermal solution in the system before using this board in the end application.

²The LBEE5HY1MW Wi-Fi & BT module supports operating temperature -30°C to 85°C with the default module's firmware. To set the module temperature to industrial grade in firmware, please contact iWave.

³ For more information on Thermal solution & Heat sink/ Heat Spreader refer the following section.

3.2.2 Heat Sink/ Heat Spreader

For any highly integrated System On Modules, thermal design is a very important factor. As IC's size is decreasing and performance of module is increasing by rising processor frequencies, it generates high amount of heat which should be dissipated for the system to work as expected without fault.

To dissipate the heat, appropriate thermal management techniques like Heat spreader, Heat sink must be used. Always remember that more effective thermal solution will give more performance out of the SoC.

Heat spreader acts as thermal coupling device between Module and external thermal solution. Heat spreader also provides thermal coupling to SoC via gap filler for better heat exchange. Heat spreader is not a complete thermal solution by itself. Heat spreader has to be used with application specific thermal solutions like heat sinks, Chassis, fans, Heat pipes etc.

Note: iWave supports Heat Sink/ Heat Spreader Solution for i.MX 8M Plus SMARC SOM. For more information on Heat Sink/ Heat Spreader contact iWave support team. Do not Power On the SOM without a proper thermal solution.

3.2.3 RoHS Compliance

iWave's i.MX 8M Plus SMARC SOM is designed by using RoHS compliant components and manufactured on lead free production process.

3.2.4 Electrostatic Discharge

iWave's i.MX 8M Plus SMARC SOM is sensitive to electro static discharge and so high voltages caused by static electricity could damage some of the devices on board. It is packed with necessary protection while shipping. Do not open or use the SOM except at an electrostatic free workstation.

3.3 Mechanical Characteristics

3.3.1 i.MX 8M Plus SMARC SOM Mechanical Dimensions

i.MX 8M Plus SMARC SOM PCB size is 50 mm x 82mm x 1.2mm. The i.MX 8M Plus SMARC SOM PCB thickness is 1.2mm±0.15mm, top side maximum height component is 3.5mm (debug Connector) which is optional in default configuration hence 3.4mm FAN header will be the maximum height on Top side in default configuration followed by optional GNSS module (2.6mm) & RTC Controller (1.75mm). In bottom side maximum height component is optional MIPI CSI Camera connector (2mm) followed by D11 diode (1.35mm).

4. ORDERING INFORMATION

The below table provides the standard orderable part numbers for different i.MX 8M Plus SMARC SOM variants. Please contact iWave for orderable part number of higher RAM memory size or Flash memory size SOM configurations. Also, if the desired part number is not listed in below table or if any custom configuration part number is required, please contact iWave.

Table 12: Orderable Product Part Numbers

Product Part Number	Description	Temperature
iW-Rainbow G40M - i.MX 8M Plus SMARC SOM (Industrial grade) With Wi-Fi & 2 x Ethernet		
iW-G40M-SCPQ-4L001G-E008G-BIA	i.MX 8M Plus Quad, 1GB LPDDR4, 8GB eMMC, 2xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPL-4L001G-E008G-BIA	i.MX 8M Plus Quad Lite, 1GB LPDDR4, 8GB eMMC, 2xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPD-4L001G-E008G-BIA	i.MX 8M Plus Dual, 1GB LPDDR4, 8GB eMMC, 2xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPQ-4L002G-E016G-BIA	i.MX 8M Plus Quad, 2GB LPDDR4, 16GB eMMC, 2xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPL-4L002G-E016G-BIA	i.MX 8M Plus Quad Lite, 2GB LPDDR4, 16GB eMMC, 2xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPD-4L002G-E016G-BIA	i.MX 8M Plus Dual, 2GB LPDDR4, 16GB eMMC, 2xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPQ-4L004G-E016G-BIA	i.MX 8M Plus Quad, 4GB LPDDR4, 16GB eMMC, 2xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPL-4L004G-E016G-BIA	i.MX 8M Plus Quad Lite, 4GB LPDDR4, 16GB eMMC, 2xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPD-4L004G-E016G-BIA	i.MX 8M Plus Dual, 4GB LPDDR4, 16GB eMMC, 2xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-Rainbow G40M - i.MX 8M Plus SMARC SOM (Industrial grade) Without Wi-Fi & 2 x Ethernet		
iW-G40M-SCPQ-4L001G-E008G-BIB	i.MX 8M Plus Quad, 1GB LPDDR4, 8GB eMMC, 2xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPL-4L001G-E008G-BIB	i.MX 8M Plus Quad Lite, 1GB LPDDR4, 8GB eMMC, 2xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPD-4L001G-E008G-BIB	i.MX 8M Plus Dual, 1GB LPDDR4, 8GB eMMC, 2xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPQ-4L002G-E016G-BIB	i.MX 8M Plus Quad, 2GB LPDDR4, 16GB eMMC, 2xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPL-4L002G-E016G-BIB	i.MX 8M Plus Quad Lite, 2GB LPDDR4, 16GB eMMC, 2xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPD-4L002G-E016G-BIB	i.MX 8M Plus Dual, 2GB LPDDR4, 16GB eMMC, 2xEthernet - Without Wi-Fi, BT	-40°C to 85°C

i.MX 8M Plus SMARC SOM Hardware User Guide

Product Part Number	Description	Temperature
iW-G40M-SCPQ-4L004G-E016G-BIB	i.MX 8M Plus Quad, 4GB LPDDR4, 16GB eMMC, 2xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPL-4L004G-E016G-BIB	i.MX 8M Plus Quad Lite, 4GB LPDDR4, 16GB eMMC, 2xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-Rainbow G40M - i.MX 8M Plus SMARC SOM (Industrial grade) With Wi-Fi & 1 x Ethernet		
iW-G40M-SCPQ-4L001G-E008G-BIC	i.MX 8M Plus Quad, 1GB LPDDR4, 8GB eMMC, 1xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPL-4L001G-E008G-BIC	i.MX 8M Plus Quad Lite, 1GB LPDDR4, 8GB eMMC, 1xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPD-4L001G-E008G-BIC	i.MX 8M Plus Dual, 1GB LPDDR4, 8GB eMMC, 1xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPQ-4L002G-E016G-BIC	i.MX 8M Plus Quad, 2GB LPDDR4, 16GB eMMC, 1xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPL-4L002G-E016G-BIC	i.MX 8M Plus Quad Lite, 2GB LPDDR4, 16GB eMMC, 1xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPD-4L002G-E016G-BIC	i.MX 8M Plus Dual, 2GB LPDDR4, 16GB eMMC, 1xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPQ-4L004G-E016G-BIC	i.MX 8M Plus Quad, 4GB LPDDR4, 16GB eMMC, 1xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPL-4L004G-E016G-BIC	i.MX 8M Plus Quad Lite, 4GB LPDDR4, 16GB eMMC, 1xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPD-4L004G-E016G-BIC	i.MX 8M Plus Dual, 4GB LPDDR4, 16GB eMMC, 1xEthernet - With Wi-Fi, BT	-40°C to 85°C
iW-Rainbow G40M - i.MX 8M Plus SMARC SOM (Industrial grade) Without Wi-Fi & 1 x Ethernet		
iW-G40M-SCPQ-4L001G-E008G-BID	i.MX 8M Plus Quad, 1GB LPDDR4, 8GB eMMC, 1xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPL-4L001G-E008G-BID	i.MX 8M Plus Quad Lite, 1GB LPDDR4, 8GB eMMC, 1xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPD-4L001G-E008G-BID	i.MX 8M Plus Dual, 1GB LPDDR4, 8GB eMMC, 1xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPQ-4L002G-E016G-BID	i.MX 8M Plus Quad, 2GB LPDDR4, 16GB eMMC, 1xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPL-4L002G-E016G-BID	i.MX 8M Plus Quad Lite, 2GB LPDDR4, 16GB eMMC, 1xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G440-SCPD-4L002G-E016G-BID	i.MX 8M Plus Dual, 2GB LPDDR4, 16GB eMMC, 1xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPQ-4L004G-E016G-BID	i.MX 8M Plus Quad, 4GB LPDDR4, 16GB eMMC, 1xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPL-4L004G-E016G-BID	i.MX 8M Plus Quad Lite, 4GB LPDDR4, 16GB eMMC, 1xEthernet - Without Wi-Fi, BT	-40°C to 85°C
iW-G40M-SCPD-4L004G-E016G-BID	i.MX 8M Plus Dual, 4GB LPDDR4, 16GB eMMC, 1xEthernet - Without Wi-Fi, BT	-40°C to 85°C

Note: Some Product Part Numbers are subject to MOQ, please contact iWave Support Team for further information.

For SOM identification purpose, Product Part Number and SOM Unique Serial Number are pasted as Label with QR Code on SOM.

5. APPENDIX

5.1 i.MX 8M Plus SMARC SOM Development Platform

iWave Systems supports iW-RainboW-G40D-i.MX 8M Plus SMARC SOM Development Platform which is targeted for quick validation of i.MX 8M Plus SoC based SMARC SOM and its features. Being a Nano-ITX form factor with 120mm x 120mm size, the carrier board is highly packed with all necessary interfaces & on-board connectors to validate complete SMARC supported features.

For more details on i.MX 8M Plus SMARC SOM and Development Platform, visit the below web link.

<https://www.iwavesystems.com/product/i-mx-8m-plus-smarc-som/>



Figure 7: i.MX 8M Plus SMARC SOM Development Platform

