

Ver.	Modify No.	Details	Area	P.I.C	Date


Front View

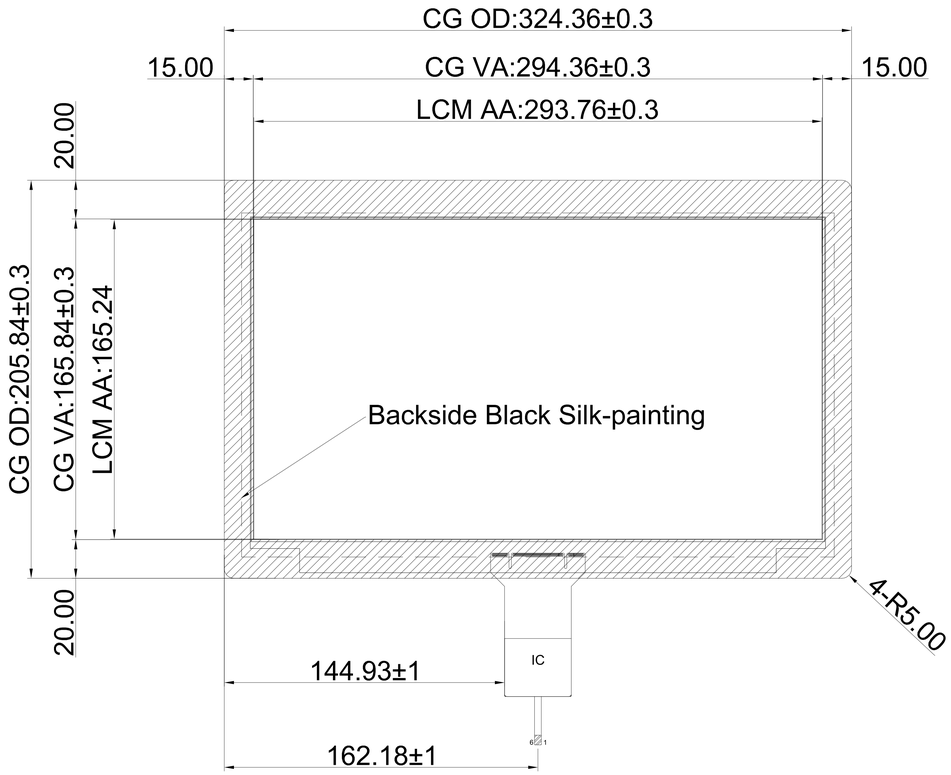

Side View

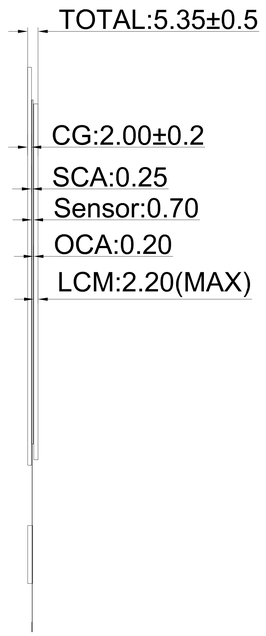

Back View

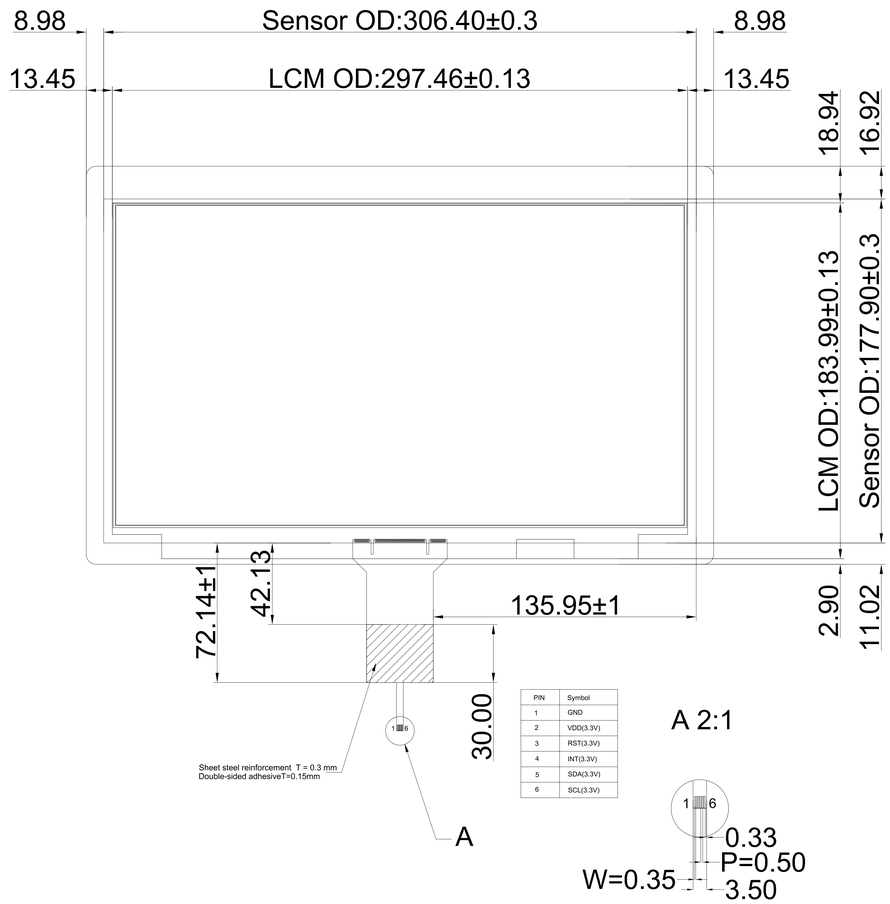

PIN	Symbol
1	GND
2	VDD(3.3V)
3	RST(3.3V)
4	INT(3.3V)
5	SDA(3.3V)
6	SCL(3.3V)

Technical Datasheet：
1. Structure: TP+LCM Optical Bonding
2. Cover Glass: 2mm Tempered Glass
3. LCD: ATNA33XC11
4. TP Controller: BTP-TPM-CTR-ILI-13.3B-SN11 COF
5. TP Controller IC: ILI2511(Interface: IIC)
6. Surface Hardness: ≥6H
7. Light Transmittance: ≥82%
8. Working Temperature: -20℃~+70℃, ≤85%RH;
9. Storage Temperature: -30℃~+80℃, ≤85%RH;
10. Unmarked Tolerance: ±0.5mm
11. All materials used conform to RoHS standardsd

Designed by:	Curry. Wang
Checked by:	Jimmy.lu
Approved by:	Cale.Chen
Workmanship:	
Standardization:	Link.Chen
Released by:	Rocky.Liu

Part No.	BTP-TPM-AT-13.3-ILI-SN11			
Product Name： 13.3 inch Touch Display (TP+LCM Optical Bonding)		Drawing No.	PM133260820SN11	
		Project Code.	PM133SN11	
Business Unit： SNT-BTP		Period Mark	View Angle	Ratio
		A		1:1
BOM Code	2.03.133.01.0111	Page 1	Total 1 Page	
Product Series	BTP-TPM	思诺泰科创电子（苏州）有限公司 SINOTECTRONICS INC.		

E-File Name: PM133260820SN11

A3