FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

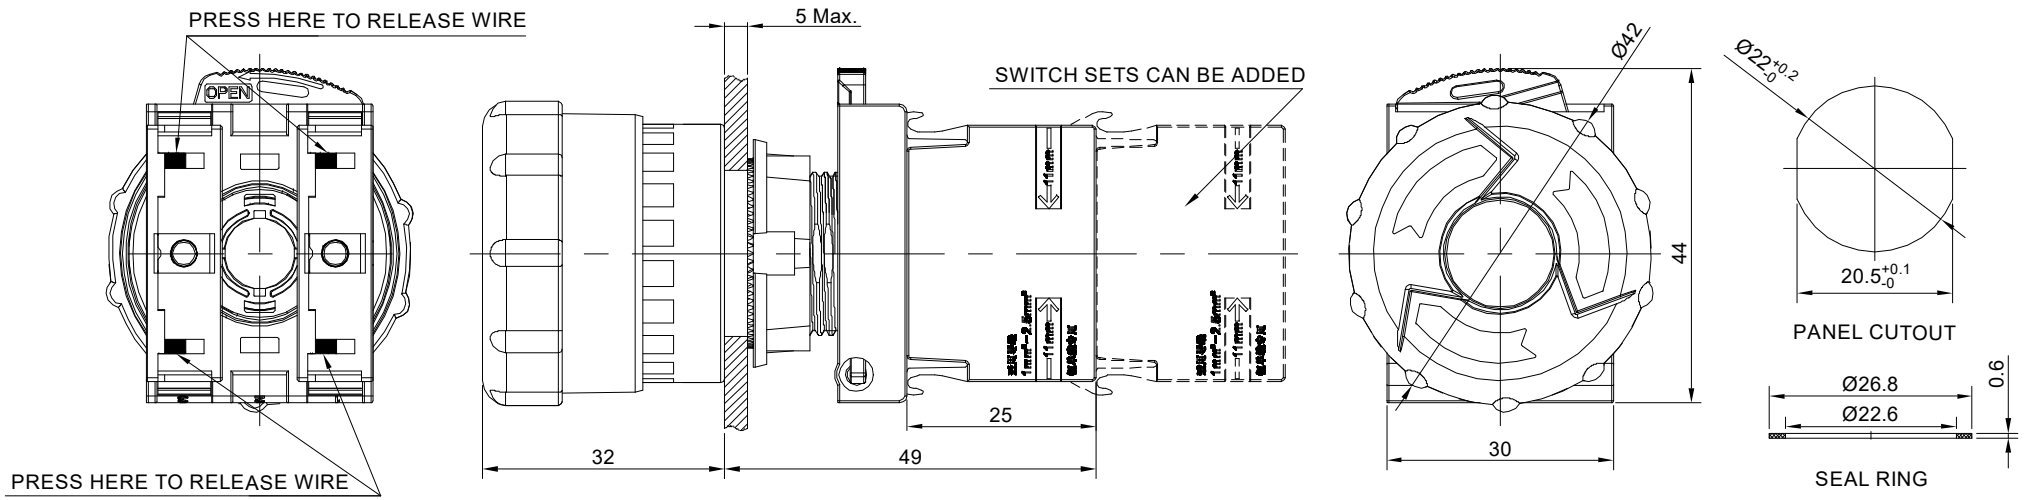

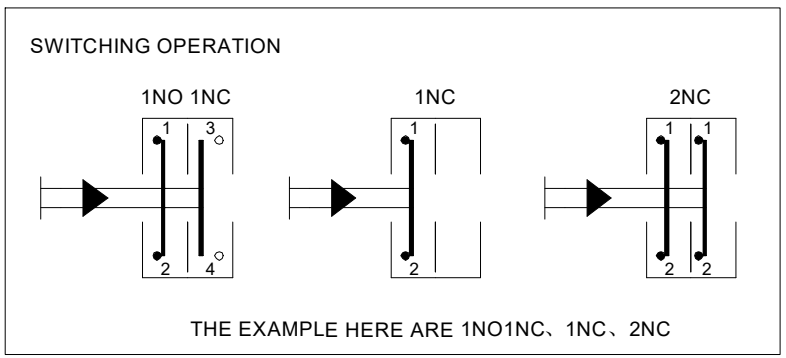

PART NUMBER:ONPOW26K-Q□TSA/※

"□"	CONTACT STRUCTURE
11	1NO 1NC
01	1NC
02	2NC
THE COMBINATION MODE CAN BE SELECTED ACCORDING TO THE NEEDS.	

"※"	PROTECTION DEGREE
NO LETTER	IP40
P	IP65

SPECIFICATIONS:
1.SWITCH RATING: Ui:500V, Ith:10A.
2.MECHANICAL LIFE: ≥200,000 cycles.
3.ELECTRICAL LIFE: ≥50,000 cycles.
4.CONTACT RESISTANCE: ≤200mΩ.
5.INSULATION RESISTANCE: ≥1000MΩ(500VDC).
6.POWER-FREQUENCY WITHSTAND VOLTAGE: 3,000V, RMS 50Hz, 1min.
7.OPERATING TEMPERATURE: -25℃～ +55℃(NO FREEZING, KEEP THE AIR FLOWING AROUND PUSHBUTTON).
8.TORQUE: 0.6Nm Max. APPLIED TO NUT.
9.OPERATING FORCE: ABOUT 20N.
10.OPERATING TRAVEL: ABOUT 8mm.
11.FRONT PANEL PROTECTION DEGREE: IP40/IP65.
12.TERMINAL TYPE: WIRE CONNECTION, DIAMETER: 1mm² ~2.5mm².
13.GENERAL TOLERANCE:0-18mm=±0.25, 18-80mm=±0.52.
14.RoHS CAN BE CUSTOMIZED.

MATERIALS:
1.CONTACT: SILVER ALLOY.
2.BUTTON: PA.
3.BODY: PA.
4.BASE: PA.

BRAND 品牌	红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.				
ONPOW 欧宝龙®					
TITLE 名称	ONPOW26 SERIES PUSHBUTTON SWITCHES			UNIT 单位	mm
DWG NO. 图号	ONPOW26K-QTSA(不带灯)		SCALE 比例	1 : 1	SIZE 图纸	A4
FILE NAME 档案名称	ONPOW26K-QTSA .DWG	DRAWN 制图	LJJ 2026/05/28	SHEET 张	1/1	REV. 版本	V1.0