(V) Preliminary Specifications
( ) Final Specifications[i]

Module	19 Inch Color TFT-LCD
Model Name	G190EAN01.3 (V310)

Customer	**Date**	**Approved by**	**Date**
		Buffy Chen	2026/03/23
Checked & Approved by	**Date**	**Prepared by**	**Date**
		Annie Sun	2026/03/23
		General Display Business Division / AUO Display Plus Corporation	

AUO Display Plus Confidential For Reference Use Only

Contents

1. Operating Precautions 4
2. General Description 5
2.1 Display Characteristics 5
2.2 Optical Characteristics 6
3. Functional Block Diagram 9
4. Absolute Maximum Ratings 10
4.1 Absolute Ratings of TFT LCD Module 10
4.2 Absolute Ratings of Environment 10
5. Electrical Characteristics 11
5.1 TFT LCD Module 11
5.2 Backlight Unit 13
6. Signal Characteristic 15
6.1 Pixel Format Image 15
6.2 Signal Description 15
6.3 Signal Description 16
6.4 The Input Data Format 18
6.5 Interface Timing 19
6.6 Power ON/OFF Sequence 20
7. Reliability Test Criteria 21
8. Mechanical Characteristics 22
8.1 LCM Outline Dimension 22
9. Label and Packaging 24
9.1 Shipping Label (on the rear side of TFT-LCD display) 24
9.2 Carton Package 24
10. Safety 25
10.1 Keen Edge Requirements 25
10.2 Materials 25
10.3 Capacitors 25
10.4 International Safety Standard Compliance 25

AUO Display Plus Confidential For Reference Use Only

Record of Revision

Version	Date (yyyy/m/d)	Page	Old description	New Description
0	2026/03/23	All	First draft specification	

AUO Display Plus Confidential For Reference Use Only

1. Operating Precautions

1) Since front polarizer is easily damaged, please be cautious and not to scratch it.
2) Be sure to turn off power supply when inserting or disconnecting from input connector.
3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
4) When the panel surface is soiled, wipe it with absorbent cotton or soft cloth.
5) Since the panel is made of glass, it may be broken or cracked if dropped or bumped on hard surface.
6) To avoid ESD (Electro Static Discharde) damage, be sure to ground yourself before handling TFT-LCD Module.
7) Do not open nor modify the module assembly.
8) Do not press the reflector sheet at the back of the module to any direction.
9) In case if a module has to be put back into the packing container slot after it was taken out from the container, do not press the center of the LED light bar edge. Instead, press at the far ends of the LED light bar edge softly. Otherwise the TFT Module may be damaged.
10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
11) TFT-LCD Module is not allowed to be twisted & bent even force is added on module in a very short time. Please design your display product well to avoid external force applying to module by end-user directly.
12) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
13) Severe temperature condition may result in different luminance, response time and lamp ignition voltage.
14) Continuous operating TFT-LCD display under low temperature environment may accelerate lamp exhaustion and reduce luminance dramatically.
15) The data on this specification sheet is applicable when LCD module is placed in landscape position.
16) Continuous displaying fixed pattern may induce image sticking. It's recommended to use screen saver or shuffle content periodically if fixed pattern is displayed on the screen.
17) The customer's design shall include sufficient allowance for warpage variation.

AUO Display Plus Confidential For Reference Use Only

2. General Description

G190EAN01.3 is a Color Active Matrix Liquid Crystal Display composed of a TFT-LCD panel, a driver and power supply circuit, and a LED backlight system. The screen format is intended to support the SXGA (1280(H) x 1024(V)) screen and 16.7M colors. All input signals are 2-channel LVDS interface compatible. LED driving board for backlight unit is included in G190EAN01.3.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

Items	Unit	Specifications
Screen Diagonal	[inch]	19”
Active Area	[mm]	376.32 (H) x 301.06 (V)
Resolution		1280(x3) x 1024
Pixel Pitch	[mm]	0.294 (per one triad) x 0.294
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		Normally Black, AHVA
Nominal Input Voltage VDD	[Volt]	+5.0 V
Power Consumption	[Watt]	Logic: max. 4W@ white pattern BL power: max. 13.9 W
Weight	[Grams]	1700g (typ.)
Physical Size	[mm]	396.0(H) x 324.0(V) x 15.3(D)(typ.)
Electrical Interface		LVDS
Surface Treatment		Anti-Glare
Support Color		16.7M color (8bit)
Temperature Range Operating Storage (Non-Operating)	 [°C] [°C]	 0 to +50 -20 to +60
RoHS Compliance		Yes

AUO Display Plus Confidential For Reference Use Only

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25 °C (Room Temperature):

Item	Unit	Conditions		Min.	Typ.	Max.	Note
White Luminance	cd/m2	I_{LED}=60mA(center point)		280	350	-	1
Uniformity	%	9 points		75	80	-	2,3
Contrast Ratio	--			700	1000	-	4
Response Time	msec	Rising		-	13	18	5
		Falling		-	12	17	
		Rising + Falling		-	25	35	
Viewing Angle	degree	Horizontal CR >= 10	(Right)	85	89	-	6
			(Left)	85	89	-	
		Vertical CR >= 10	(Upper)	85	89	-	
			(Lower)	85	89	-	
Color / Chromaticity Coordinates (CIE 1931)	--	Red x		(0.621)	(0.651)	(0.681)	
		Red y		(0.313)	(0.343)	(0.373)	
		Green x		(0.272)	(0.302	(0.332)	
		Green y		(0.581)	(0.611)	(0.641)	
		Blue x		(0.125)	(0.155)	(0.185)	
		Blue y		(0.045)	(0.075)	(0.105)	
		White x		0.263	0.313	0.363	
		White y		0.279	0.329	0.379	
Color Gamut	%			---	72	---	


Note 1: Measurement method

Equipment Pattern Generator, Power Supply, Digital Voltmeter, Luminance meter (SR_3 or equivalent)

Aperture 1◦with 50cm viewing distance


Test Point Center

Environment *< 1 lux*

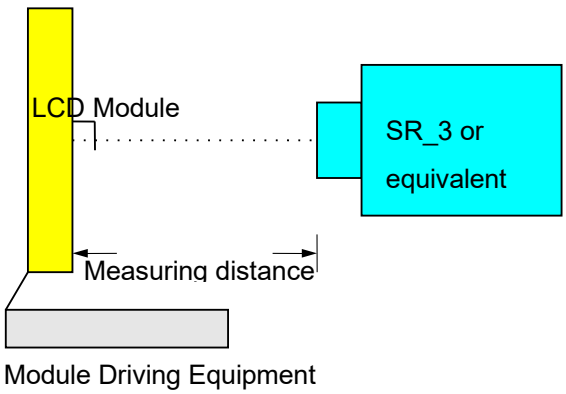

AUO Display Plus Confidential For Reference Use Only

Note 2: Definition of 9 points position

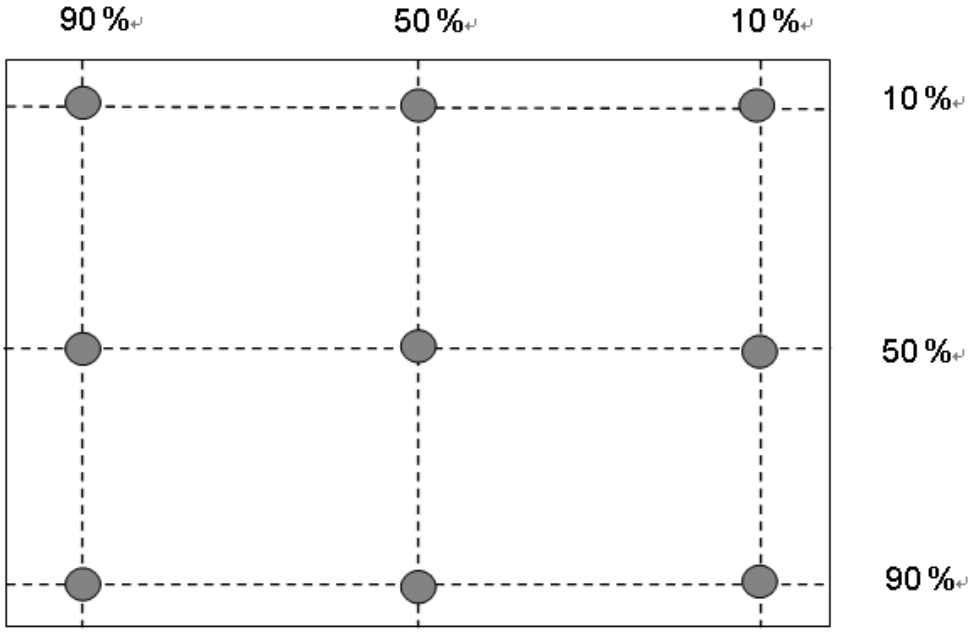

Note 3: The luminance uniformity of 9 points is defined by dividing the minimum luminance values by the maximum test point luminance


$$\delta_{W9} = \frac{\text{Minimum Brightness of 9 points}}{\text{Maximum Brightness of 9 points}}$$

Note 4: Definition of contrast ratio (CR):

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the “White” state}}{\text{Brightness on the “Black” state}}$$

Note 5: Definition of response time:


The output signals of photo detector are measured when the input signals are changed from “White” to “Black” (falling time) and from “Black” to “White” (rising time), respectively. The response time interval is between 10% and 90% of amplitudes. Please refer to the figure as below.

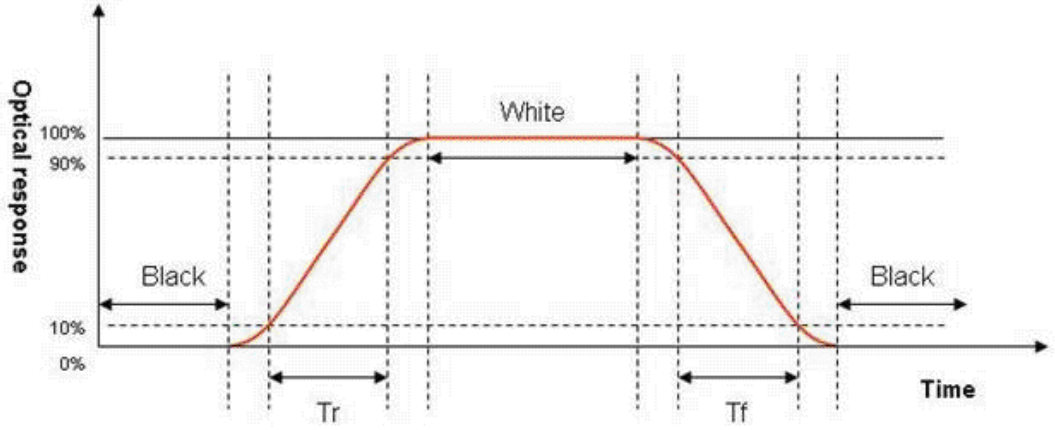

AUO Display Plus Confidential For Reference Only

Note 6: Definition of viewing angle


Viewing angle is the measurement of contrast ratio ≧10, at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as below: 90° (θ) horizontal left and right, and 90° (Φ) vertical high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated to its center to develop the desired measurement viewing angle.

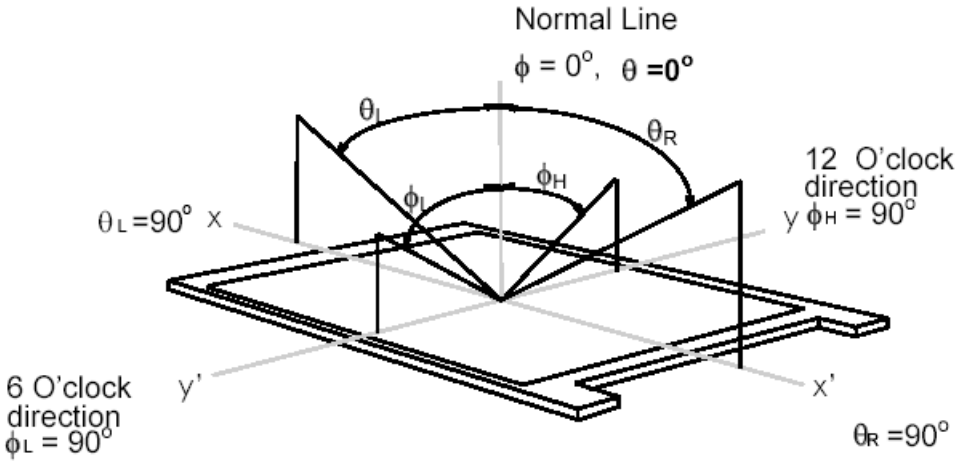

AUO Display Plus Confidential Use Only

3. Functional Block Diagram

The following diagram shows the functional block of the 19.0 inch color TFT/LCD module:

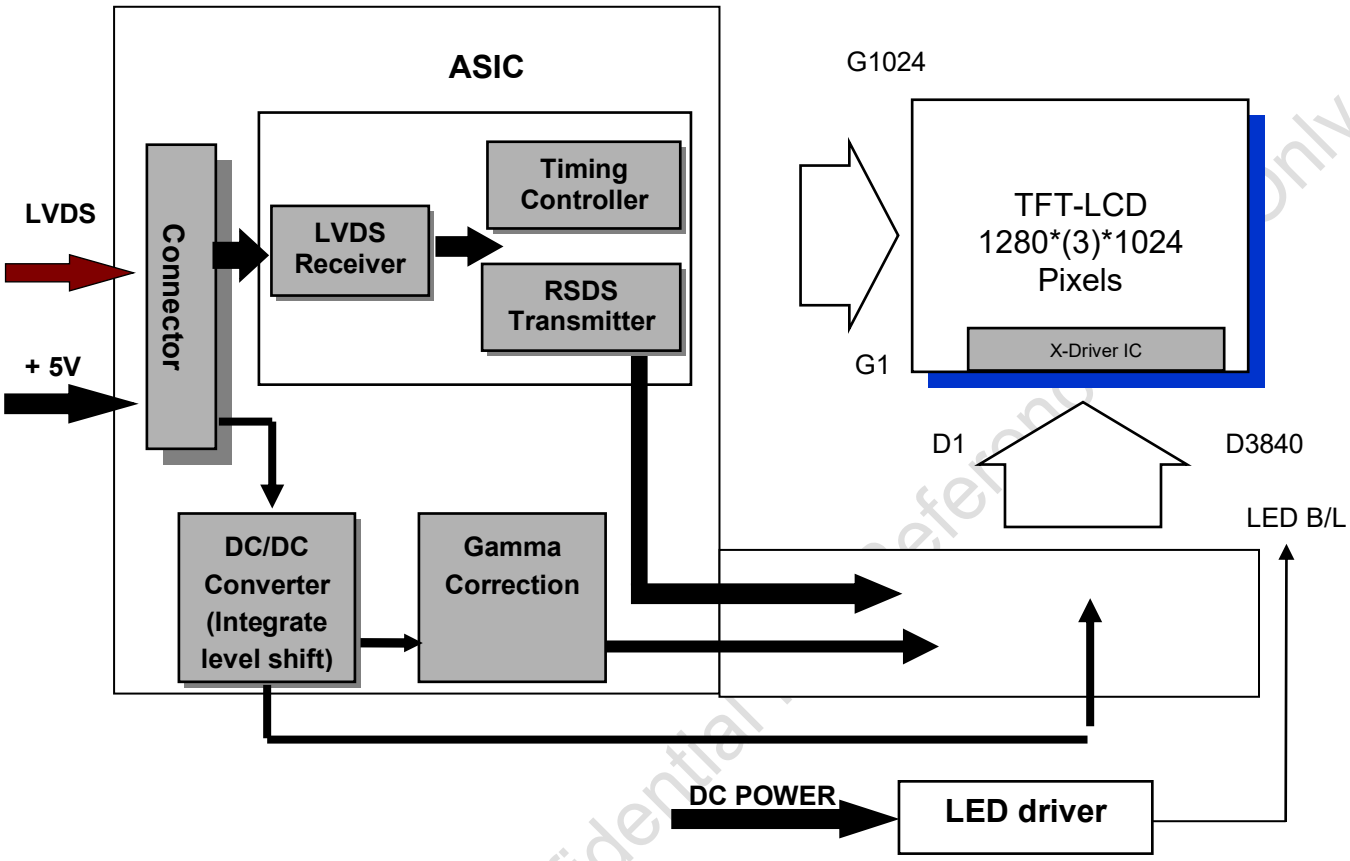

I/F PCB Interface:

AL230F-A0G1D-P

Mating Type:

FI-X30HL (Locked Type)

FI-X30H (Unlocked Type)

AUO Display Plus Confidential - Reference Only

4. Absolute Maximum Ratings

4.1 Absolute Ratings of TFT LCD Module

Item	Symbol	Min	Max	Unit
Logic/LCD drive Voltage	VDD	-0.3	+5.5	[Volt]

4.2 Absolute Ratings of Environment


Item	Symbol	Min	Max	Unit
Operating Temperature	TOP	0	+50	[°C]
Operation Humidity	HOP	5	90	[%RH]
Storage Temperature	TST	-20	+60	[°C]
Storage Humidity	HST	5	90	[%RH]

Note 1: At Ta (25℃), Maximum Wet-Bulb should be 39 °C and no condensation.

Note 2: Permanent damage to the device may occur if exceed maximum values

Note 3: LED specification refer to section 5.2

Note 4: For quality performance, please refer to AUO IIS (Incoming Inspection Standard)

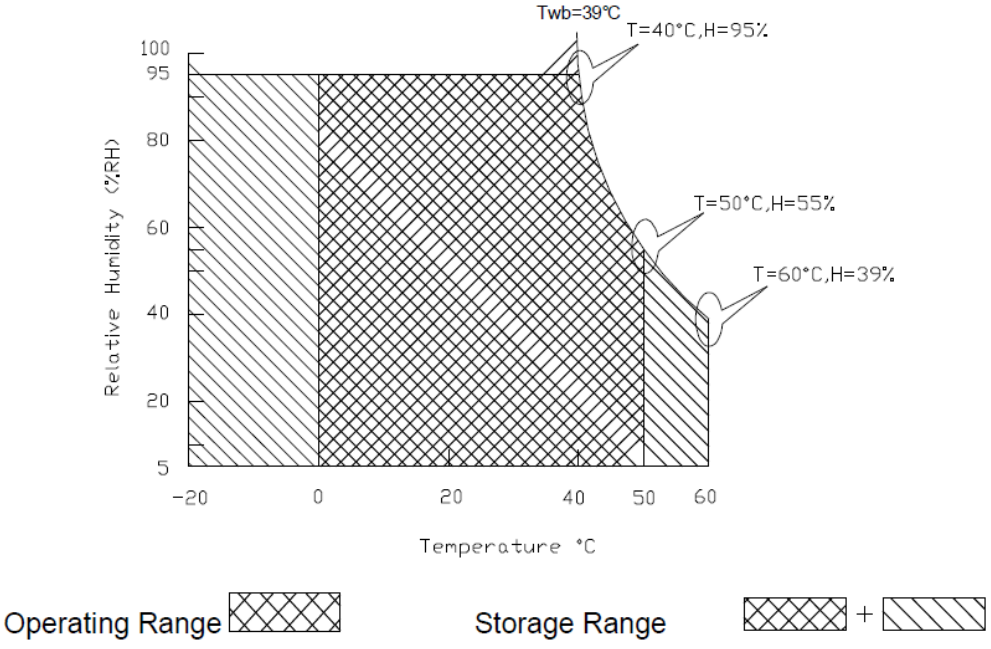

Material For Reference Use Only

5. Electrical Characteristics


5.1 TFT LCD Module


5.1.1 Power Specification

Input power specifications are shown as follows.

Symbol	Parameter	Min	Typ	Max	Units	Remark
VDD	Logic/LCD Drive Voltage	4.5	5.0	5.5	[Volt]	±10%
IDD	VDD Current	-	0.67	0.8	[mA]	All White Pattern (VDD=5V, at 60Hz)
IRush	LCD Inrush Current	-	2.7	3.4	[A]	Note
PDD	VDD Power	-	3.35	4.0	[Watt]	All White Pattern (VDD=5V, at 60Hz)
VDDrp	Allowable Logic/LCD Drive Ripple Voltage	-	-	300	[mV] p-p	With panel loading

Note 1: Measurement condition:

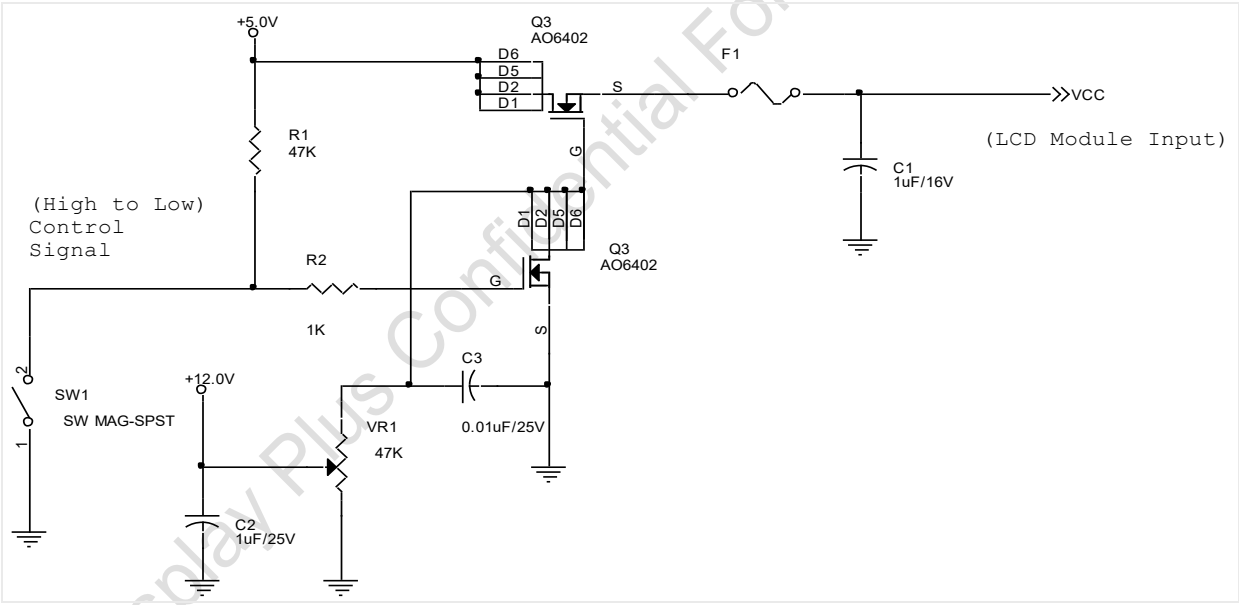

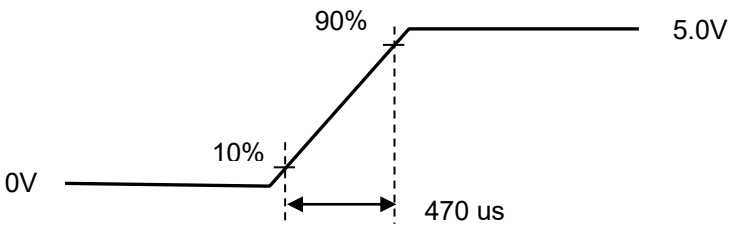

VDD rising time


AUO Display Plus Confidential For Reference Use Only

5.1.2 LVDS DC Signal Electrical Characteristics

Symbol	Item	Min.	Typ.	Max.	Unit	Remark
VTH	Differential Input High Threshold	-	-	+100	[mV]	VCM=1.2V
VTL	Differential Input Low Threshold	-100	-	-	[mV]	VCM=1.2V
| VID |	Input Differential Voltage	100	400	600	[mV]	
VICM	Differential Input Common Mode Voltage	+1.0	+1.2	+1.5	[V]	VTH/VTL=+-100mV

Input signals shall be low or Hi-Z state when VDD is off.

Note: LVDS Signal Waveform.

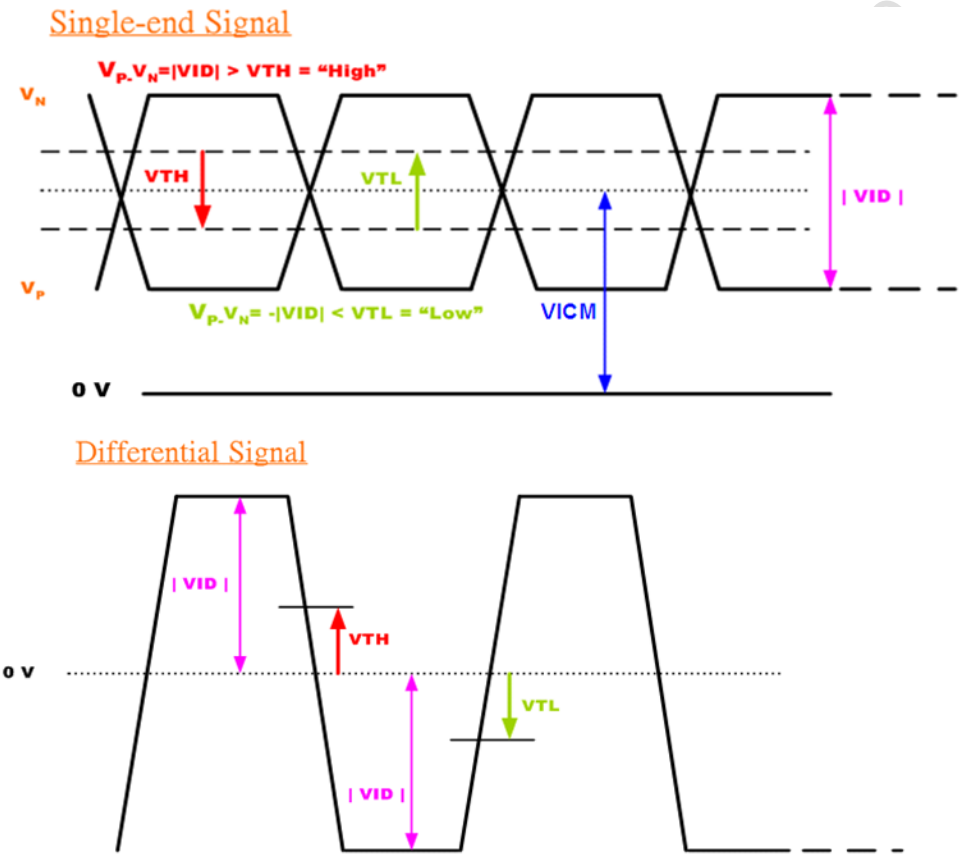

AUO Dis Use Only

5.2 Backlight Unit

5.2.1 LED Backlight Unit: Driver Connector

Connector Name / Designation	Lamp Connector
Manufacturer	STM or compatible
Connector Model Number	MS24019RHD or compatible
Mating Model Number	P24019 or compatible

Pin #	Symbol	Pin Description
1	+12V	Power +12V
2	+12V	Power +12V
3	+12V	Power +12V
4	NC	NC
5	GND	GND
6	GND	GND
7	GND	GND
8	EN	Enable(0V:disable, 5V:Enable)
9	Dimming	PWM; duty 10%~ 100%

AUO Display Plus Confidential For Reference Use Only

5.2.3 Parameter guideline for LED

Following characteristics are measured under a stable condition using an inverter at 25℃ (Room Temperature):

LED characteristics

Symbol	Parameter	Min	Typ	Max	Units	Condition
PLED	Backlight Power Consumption	-	11	11.6	[Watt]	LED only
LTLED	LED Life-Time	50,000	--	--	Hour	LED only

Note 1: Calculator value for reference P_{LED} = VF (Normal Distribution) * IF (Normal Distribution) / Efficiency

Note 2: The LED life-time define as the estimated time to 50% degradation of initial luminous. LED lifetime is restricted under normal condition, ambient temperature = 25℃ and LED operating IF = 50mA.

Note 3: If the module is driven by high current or at high ambient temperature & humidity condition. The operating life will be reduced.

Backlight input signal characteristics

Symbol	Parameter	Min	Typ	Max	Units	Remark
VLED (Note 1)	LED Power Supply	10.8	12.0	13.2	[Volt]	Define as Connector Interface (Ta=25℃)
VLED_EN	LED Enable Input High Level	2.5	--	5.5	[Volt]	
	LED Enable Input Low Level	--	--	0.7	[Volt]	
VPWM_EN	PWM Logic Input High Level	2.5	--	5.5	[Volt]	
	PWM Logic Input Low Level	--	--	0.7	[Volt]	
FPWM	PWM Input Frequency *1	200	---	20K	Hz	
Duty	Dimming Duty 200Hz ~ 5KHz	5	--	100	%	
	Dimming Duty 5KHz ~ 20KHz	15	--	100	%	


Note1: Measured on panel VLED

AUO Display Plus Confidential For Reference Use Only

6. Signal Characteristic

6.1 Pixel Format Image

Following figure shows the relationship between input signal and LCD pixel format.

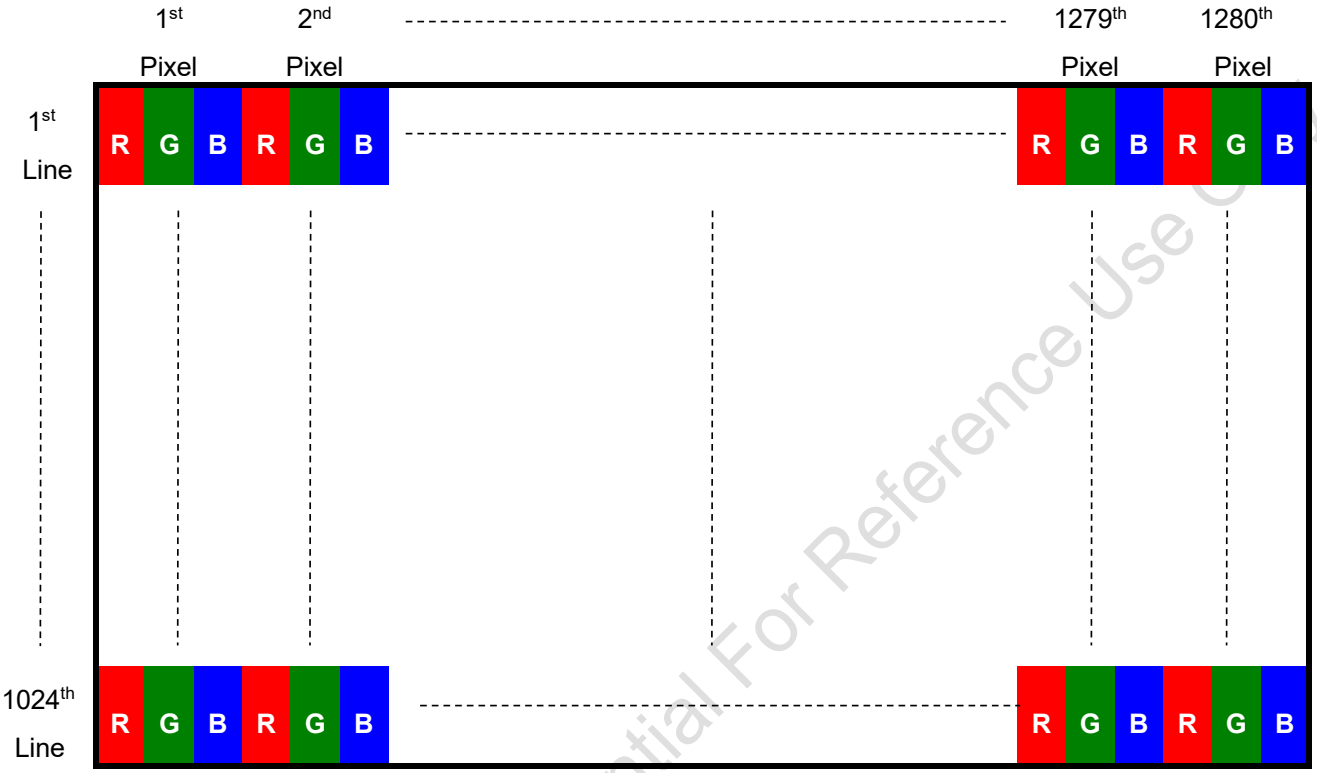

6.2 Signal Description

The following figures show the image seen from the front view. The arrow indicates the direction of scan.

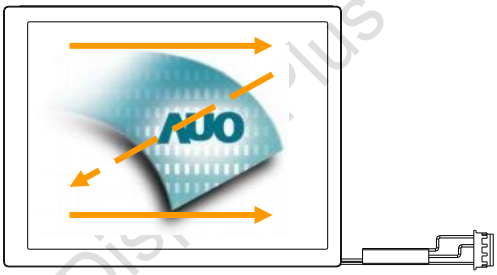


Fig. 1 Normal scan

AUO Display Plus Confidential For Reference Use Only

6.3 Signal Description

The module uses a LVDS receiver embedded in AUO's ASIC. LVDS is a differential signal technology for LCD interface and a high-speed data transfer device.


6.3.1 TFT LCD Module: LVDS Connector

Connector Name / Designation	Signal Connector
Manufacturer	P-TWO
Connector Model Number	AL230F-A0G1D-P
Adaptable Plug	FI-X30HL FI-X30H (Unlocked Type)

Pin#	Signal Name	Pin#	Signal Name
1	RxOIN0-	2	RxOIN0+
3	RxOIN1-	4	RxOIN1+
5	RxOIN2-	6	RxOIN2+
7	VSS	8	RxOCLKIN-
9	RxOCLKIN+	10	RxOIN3-
11	RxOIN3+	12	RxEIN0-
13	RxEIN0+	14	VSS
15	RxEIN1-	16	RxEIN1+
17	VSS	18	RxEIN2-
19	RxEIN2+	20	RxECLKIN-
21	RxECLKIN+	22	RxEIN3-
23	RxEIN3+	24	VSS
25	VSS	26	NC
27	VSS	28	VCC
29	VCC	30	VCC

AUO Display Plus Confidential For Reference Use Only

Note1: Start from left side

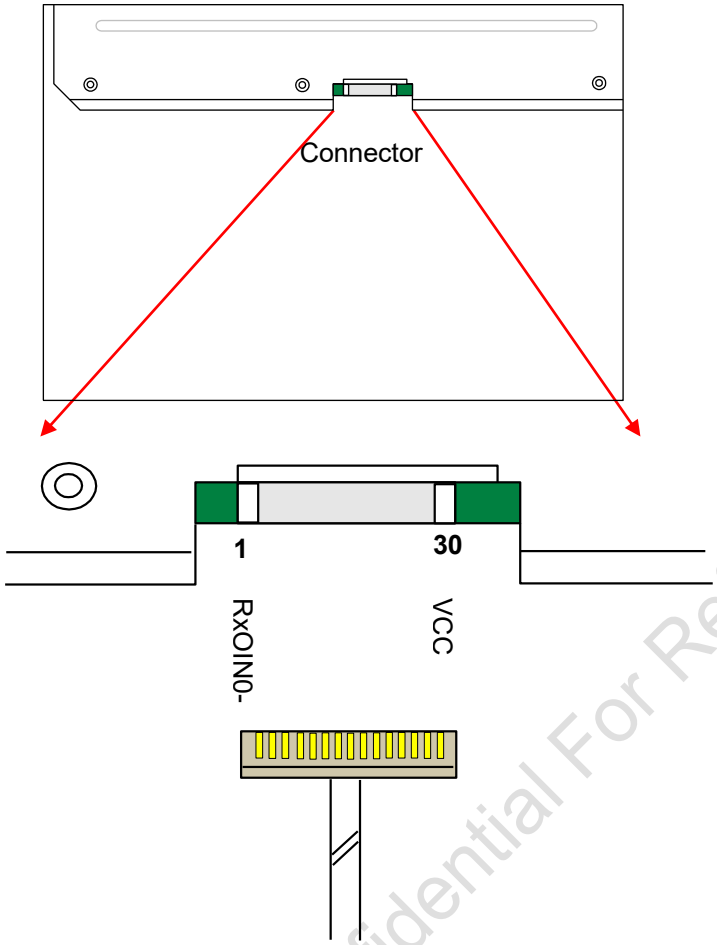


Note2: Input signals of odd and even clock shall be the same timing.

Note3: Please follow VESA.

AUO Display Plus Confidential For Reference Use Only

6.4 The Input Data Format

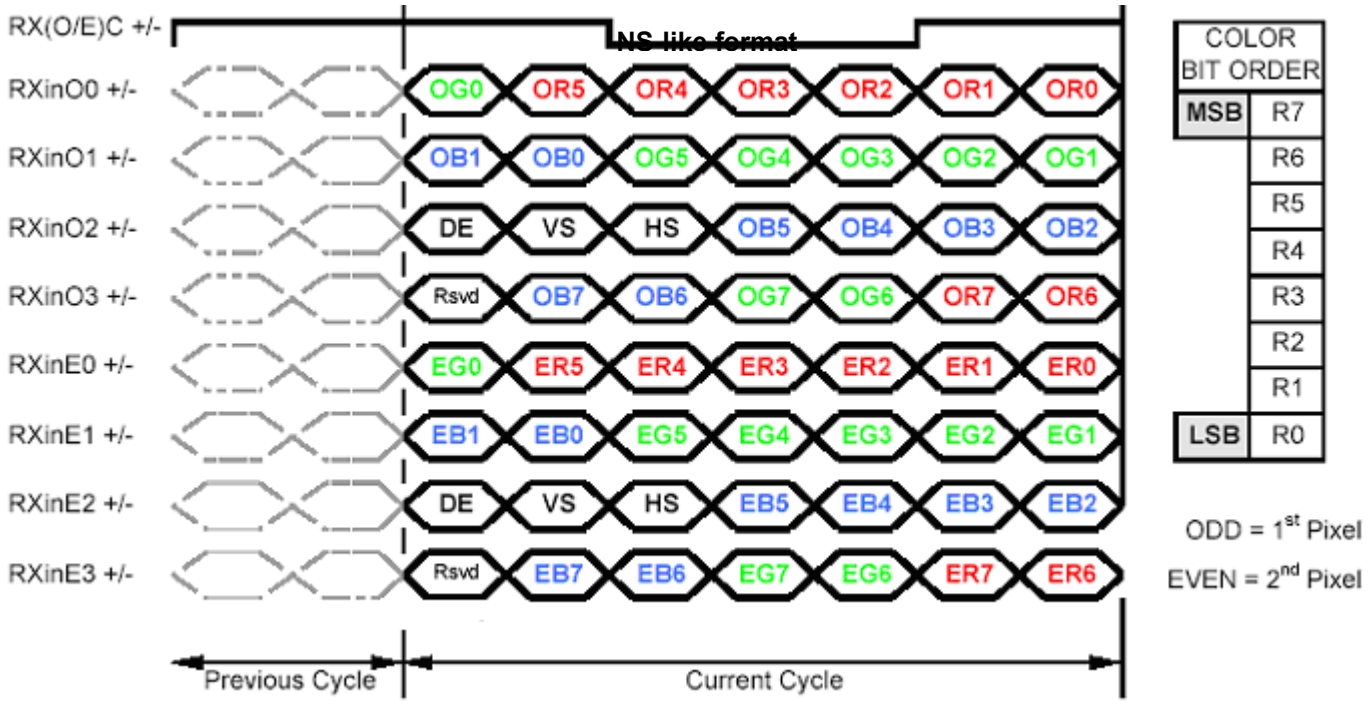

Note1: Normally DE mode only. VS and HS on EVEN channel are not used.

Note2: Please follow VESA.

Note3: 8-bit in

AUO Display Plus Confidential


6.5 Interface Timing

6.5.1 Timing Characteristics

Signal		Symbol	Min.	Typ.	Max.	Unit
Clock Frequency		1/ T_{Clock}	45	54	67.5	MHz
Vertical Section	Period	T_V	1032	1066	1150	T_{Line}
	Active	T_{VD}	1024	1024	1024	
	Blanking	T_{VB}	8	42	126	
Horizontal Section	Period	T_H	780	844	871	T_{Clock}
	Active	T_{HD}	640	640	640	
	Blanking	T_{HB}	140	204	231	
Frame Rate		F	50	60	75	Hz

Note 1: DE mode.


6.5.2 Input Timing Diagram

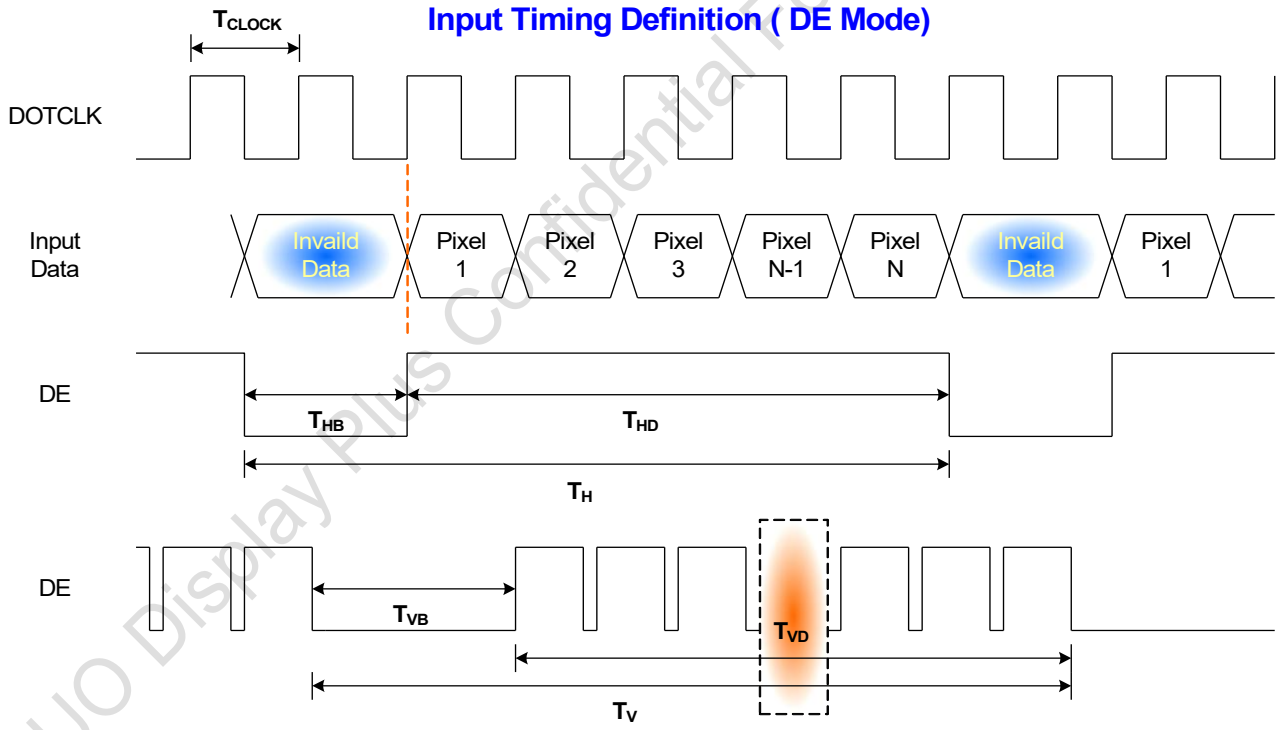

AUO Display Plus Confidential For Reference Use Only

6.6 Power ON/OFF Sequence

VDD power and lamp on/off sequence is as below. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

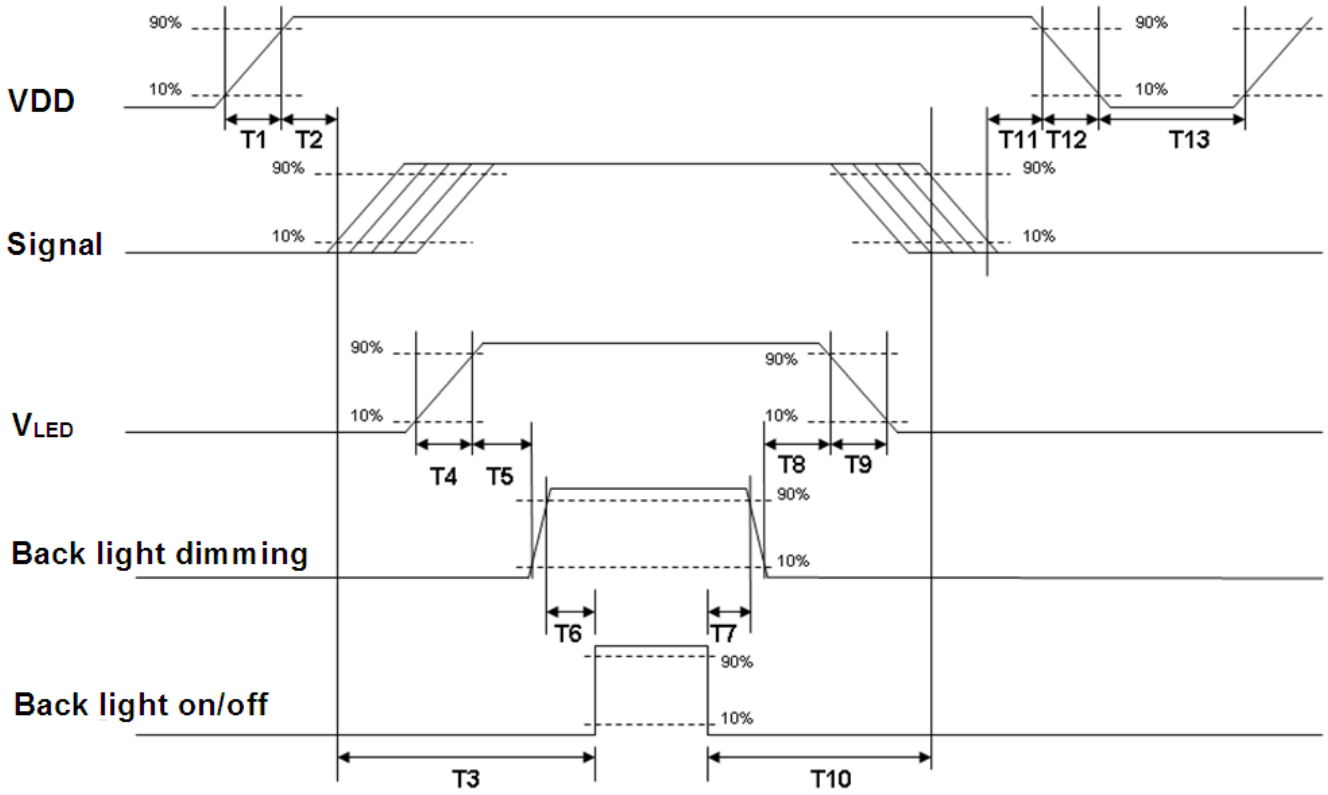

Power ON/OFF sequence timing

Parameter	Value			Units
	Min.	Typ.	Max.	
T1	0.5	-	10	[ms]
T2	30	40	50	[ms]
T3	200	-	-	[ms]
T4	0.5	-	10	[ms]
T5	10	-	-	[ms]
T6	10	-	-	[ms]
T7	0	-	-	[ms]
T8	10	-	-	[ms]
T9	-	-	10	[ms]
T10	110	-	-	[ms]
T11	0	16	50	[ms]
T12	-	-	10	[ms]
T13	1000	-	-	[ms]

The above on/off sequence should be applied to avoid abnormal function in the display. Please make sure to turn off the power when you plug the cable into the input connector or pull the cable out of the connector.

AUO Display Plus confide

7. Reliability Test Criteria

Items	Required Condition	Note
Temperature Humidity Bias	50 °C /80%,300Hr	
High Temperature Operation	50 °C, 300Hr (center point of panel surface)	
Low Temperature Operation	0 °C, 300Hr	
Hot Storage	60 °C, 300 hours	
Cold Storage	-20 °C, 300 hours	
Thermal Shock Test	-20 °C /30 min ,60 °C /30 min ,100cycles, 40 °C minimun ramp rate	
Shock Test (Non-Operating)	50G,20ms,Half-sine wave,(+-X,+-Y,+-Z)	
Vibration Test (Non-Operating)	1.5G, 10~200~10Hz, Sine wave 30mins/axis, 3 direction (X, Y, Z)	
ESD	Contact : ± 8KV/ operation, Class B Air : ± 15KV / operation, Class B	Note 1

Note 1:

According to EN61000-4-2 , ESD class B: Some performance degradation allowed. No data lost Self-recoverable. No hardware failures.


Note 2:

- Water condensation is not allowed for each test items.
- Each test is done by new TFT-LCD module. Don't use the same TFT-LCD module repeatedly for reliability test.
- The reliability test is performed only to examine the TFT-LCD module capability.
- To inspect TFT-LCD module after reliability test, please store it at room temperature and room humidity for 24 hours at least in advance.
- No function failure occurs.


AUO Display Plus Confidential For Reference Use Only

8. Mechanical Characteristics

8.1 LCM Outline Dimension

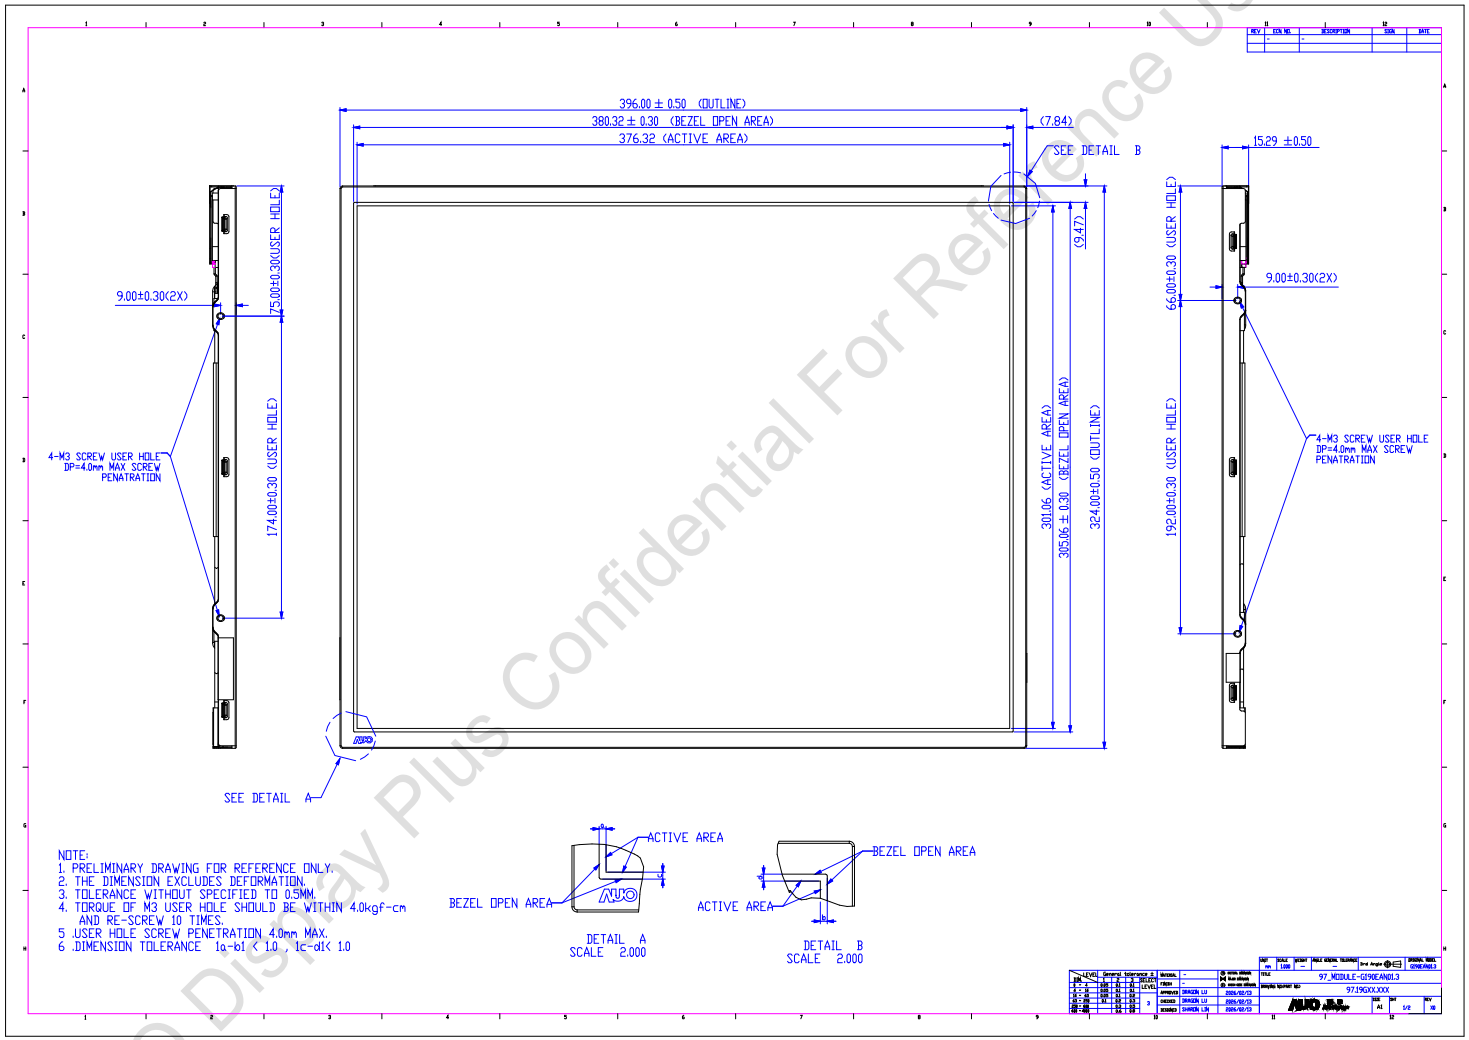

AUO Display Plus Confidential For Reference Use Only

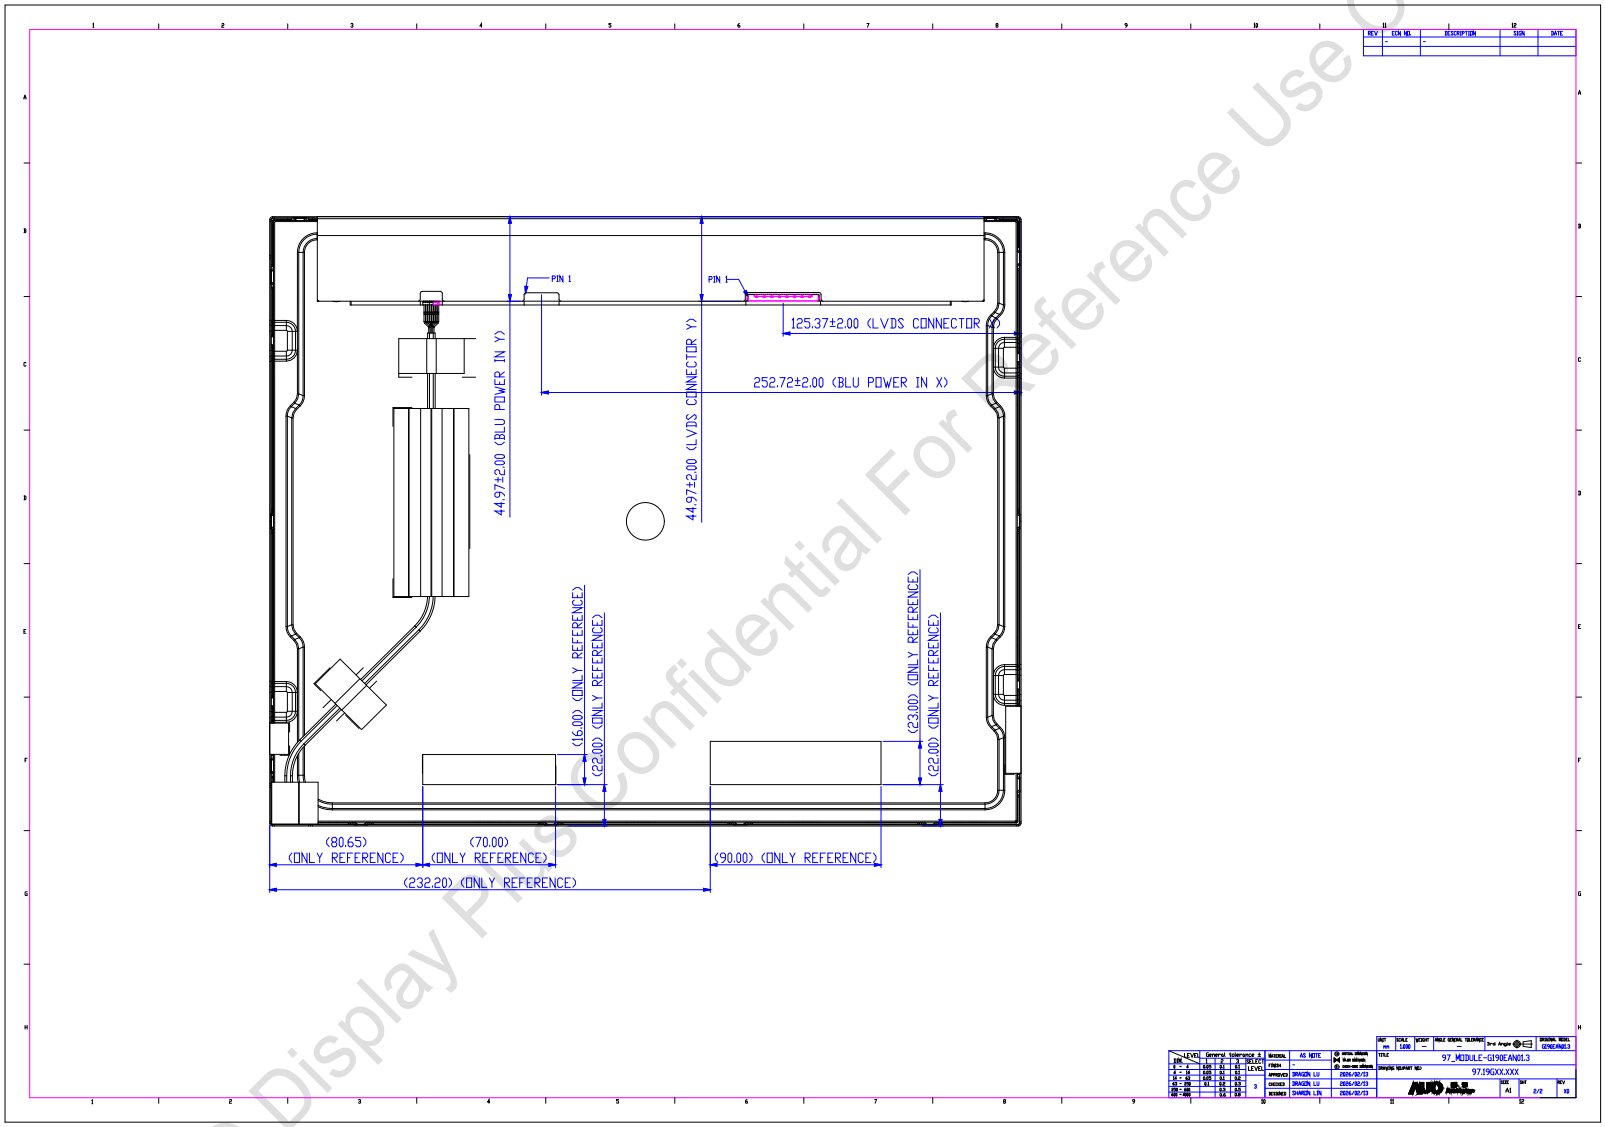

AUO Display Plus Confidential For Reference Use Only


© AUO Display Plus Corporation Proprietary

9. Label and Packaging

9.1 Shipping Label (on the rear side of TFT-LCD display)



9.2 Carton Package

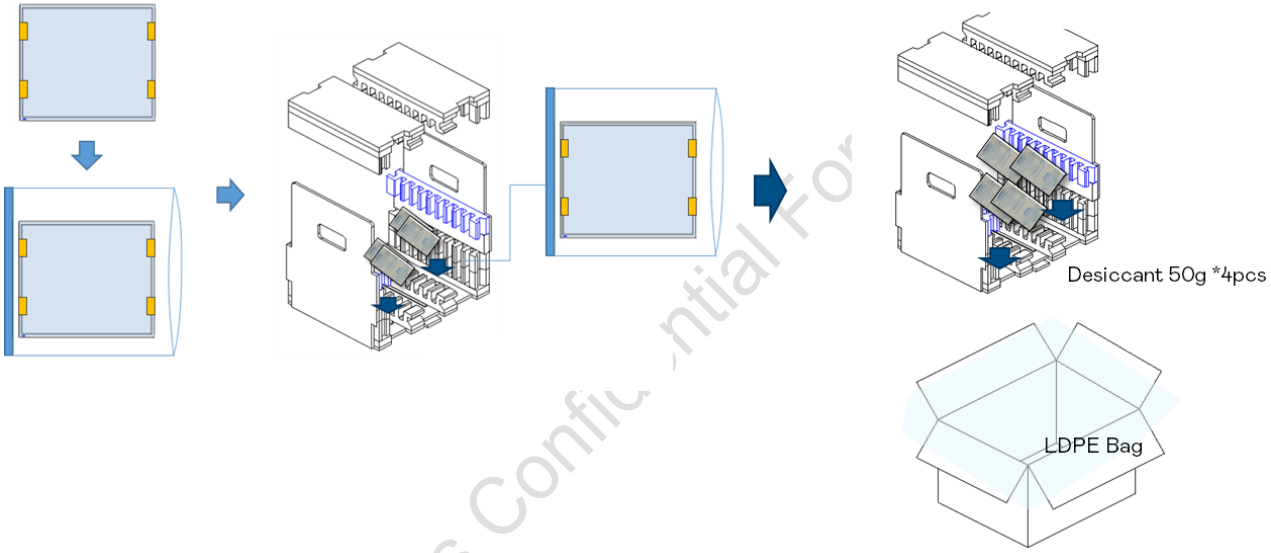

Max capacity：9 PCS TFT-LCD modules per carton

Max weight: 18 kg per carton

Outside dimension of carton: 474mm(L)* 380mm(W)*417mm(H)

Pallet size： 1150 mm * 980 mm * 135mm

Box stacked

Module by air_Max：(2 *3) *3 layers，one pallet put 18 boxes，total 162 pcs module

Module by sea_Max：(2 *3) *3 layers + (2 *3) *1 layers , two pallet put 24 boxes，total 216 pcs module

Module by sea_HQ_Max：(2 *3) *3 layers+(2 *3) *2 layers, two pallet put 30 boxes, total 270 pcs module

AUO Display Plus Confidential For Reference Only

10. Safety

10.1 Keen Edge Requirements

There will be no keen edges or comers on the display assembly that could cause injury.

10.2 Materials

10.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

10.2.2 Flammability

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process.

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

10.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

10.4 International Safety Standard Compliance

The display module will satisfy all requirements for compliance to IEC/UL 62368-1.

AUO Display Plus Confidential For Reference Use Only