

1234567

FOR
客户名称

APPROVED
客户确认签字

ATTN
销售负责人





A

B


C

D

E

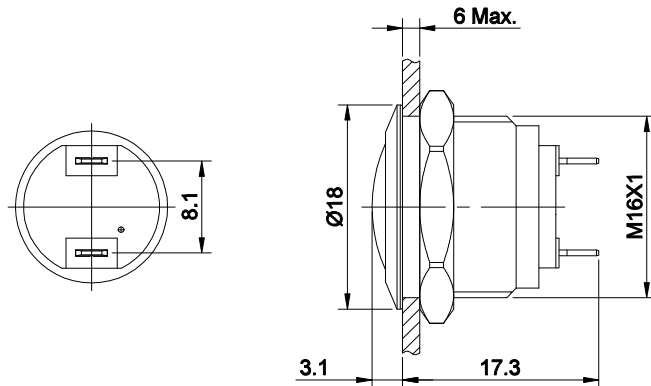

PANEL CUTOUT



Seal Ring

A

B

C

D

E

SPECIFICATIONS:

- 1.SWITCH RATING: Ui:250V, Ith:3A.
- 2.MECHANICAL LIFE: ≥1,000,000 cycles.
- 3.ELECTRICAL LIFE: ≥50,000 cycles.
- 4.CONTACT RESISTANCE: ≤50mΩ.
- 5.INSULATION RESISTANCE: ≥1000MΩ(500VDC).
- 6.POWER-FREQUENCY WITHSTAND VOLTAGE: 1,500V, RMS 50Hz, 1min.
- 7.OPERATING TEMPERATURE: -25°C~ +55°C(NO FREEZING).
- 8.OPERATING FORCE: ABOUT 4N.
- 9.OPERATING TRAVEL: ABOUT 2mm.
- 10.TORQUE: ABOUT 0.6N·m APPLIED TO NUT.
- 11.PROTECTION DEGREE: IP65.
- 12.TERMINAL TYPE: PIN TERMINAL(2 X 0.5mm).
- 13.GENERAL TOLERANCE:0-18mm=±0.25, 18-80mm=±0.52.
- 14.COMPLIANT WITH RoHS.

MATERIALS:

- 1.CONTACT: SILVER ALLOY.
- 2.BUTTON: STAINLESS STEEL.
- 3.BODY: Ø.
- 4.BASE: PBT.

PART NUMBER: GQ16B-10/J/◎

"◎"	CRUST MATERIAL
S	STAINLESS STEEL
N	NICKEL PLATED BRASS

BRAND 品牌		红波按钮制造有限公司			
ONPOW 欧宝龙®		ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.			
TITLE 名称	GQ SERIES ANTI-VANDAL PUSH BUTTON			UNIT 单位	mm
DWG NO. 图号	GQ16B-10-J			SCALE 比例	1.5 : 1
FILE NAME 档案名称	GQ16-10J.DWG	DRAWN 制图	YDY 2022/07/07	SHEET 张	1/1
		REV. 版本	V1.0		

1234567