



Ver.	Modify No.	Details	Area	P.I.C	Date

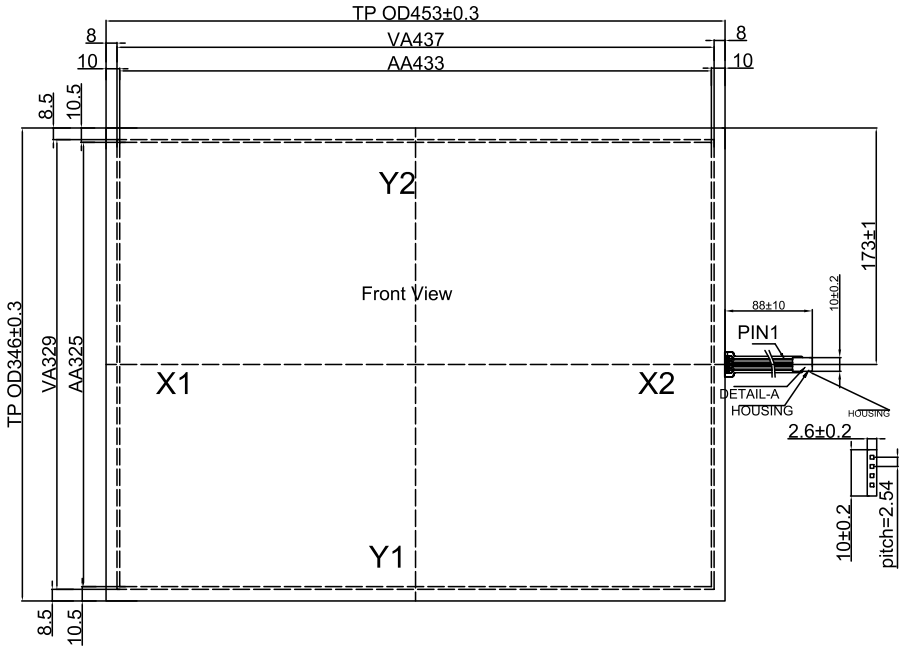



CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	Y2
2	X2
3	Y1
4	X1

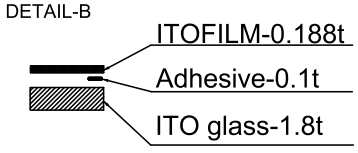

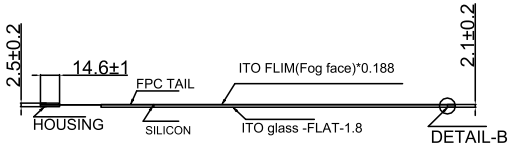

Technical Datasheet:
1.Operating Voitage:3~7V
2.Response Time:≤15ms
3.Storage Temperature:-20℃~+50℃ /20%~80%
4.Operation Temperature/Humidity:-10℃~+50℃ /20%~80%
5.Hitting Life:>1.000.000 Times.100gf Force
6.Writting Life>100.000 Times.100gf Force
7.Connect Material:FPC
8.Film Thickness:0.188mm
9.Glass Thickness:1.8mm
10.Light Transmission:78%±8%
11.Force:100g or less
12.Linearity:≤1.5.%
13.Insulation:≥20MΩ
14.Surface Hardness≥3H(pencil)
15.Unmarked tolerance as ±0.5

Designed by:	Curry. Wang
Checked by:	Betty.Fu
Approved by:	Cale.Chen
Workmanship:	Gavin
Standardization:	Link.Chen
Released by:	Rocky.Liu

Part No.	MST-RT-TPS-21.3			
Master Touch Product Name: 21.3 inch Touch Panel		Drawing No.	R213S220831	
		Project Code.	R213S	
Business Unit: SNT-BTP		Period Mark	View Angle	Ratio
		A		1:1
BOM Code	1.14.213.01.0000	Page 1	Total 1 Page	
Product Series	BTP-RT	思诺泰科创电子（苏州）有限公司 SINOTECTRONICS INC.		

E-File Name: R213S220831

A3