



Ver.	modify NO.	Details	Area	P.I.C	Date


Front View

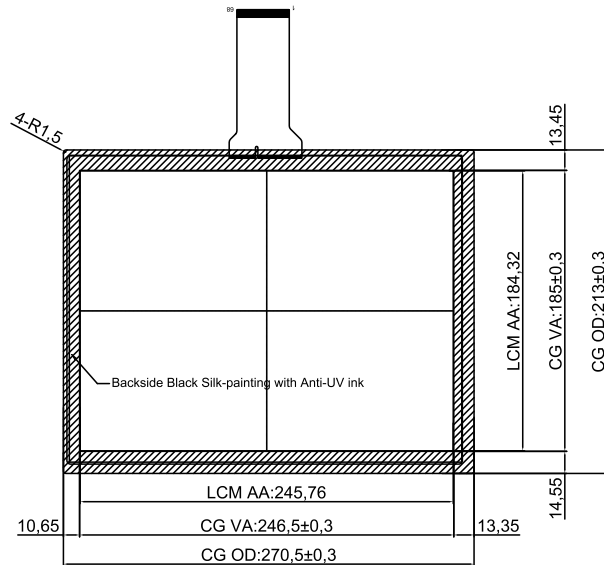

Side View


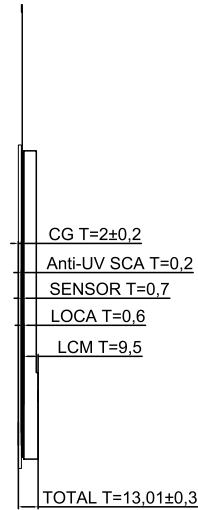


Back View

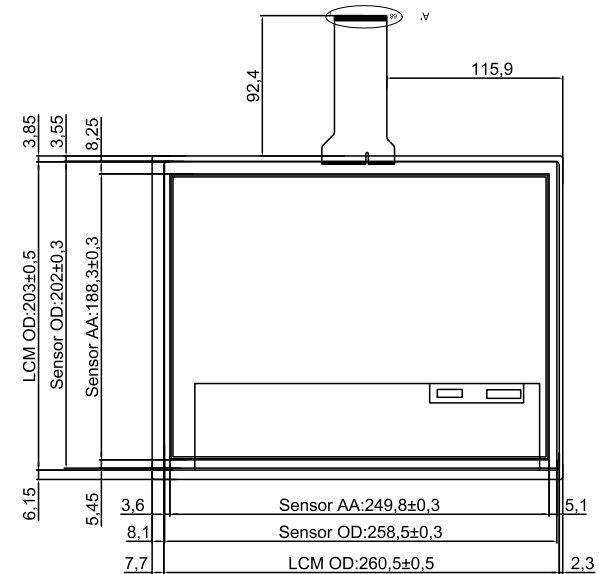

Technical Datasheet:

1. Structure: TP+LCM Optical Bonding
2. Cover Glass: 2mm Tempered Glass
3. LCD: P1210XGF1MA00
4. TP Controller: BTP-TPM-CTR-ILI-121B-SN43
5. TP Controller IC: ILI2511
6. Surface Hardness: ≥6H
7. Light Transmittance: ≥85%
8. Working Temperature: -20℃~+70℃, ≤85%RH;
9. Storage Temperature: -30℃~+80℃, ≤85%RH;
10. Unmarked Tolerance: ±0.5mm
11. All materials used conform to RoHS standardsd



Designed by:	Curry.Wang	Business Unit:		Page 1		Total 1 Page	
Checked by:	Jimmy.Lu			Period Mark		View Angle	
Approved by:	Cale.Chen			A		1:1	
Workmanship:		BOM Code	2.03.121.01.0143	Product Series		BTP-TPM	
Standardization:	Link.Chen						
Released by:	Rocky.Liu						

E-File Name: PM121251015SN43