
Ver.	Modify No.	Details	Area	P.I.C	Date

Front view

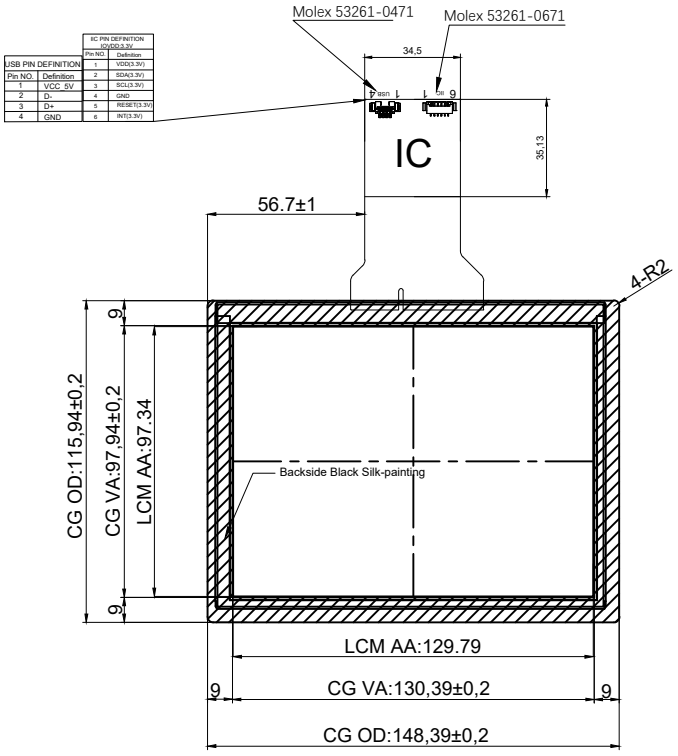


IC PIN DEFINITION
VDD(3.3V)

Pin NO.	Definition
1	VDD(3.3V)
2	SDA(3.3V)
3	SCL(3.3V)
4	GND
5	RESET(3.3V)
6	INT(3.3V)


USB PIN DEFINITION

Pin NO.	Definition
1	VCC 5V
2	D-
3	D+
4	GND

Side view

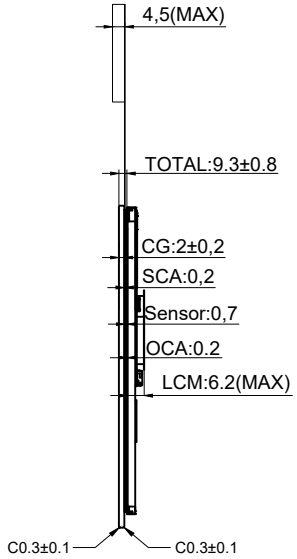

Back view

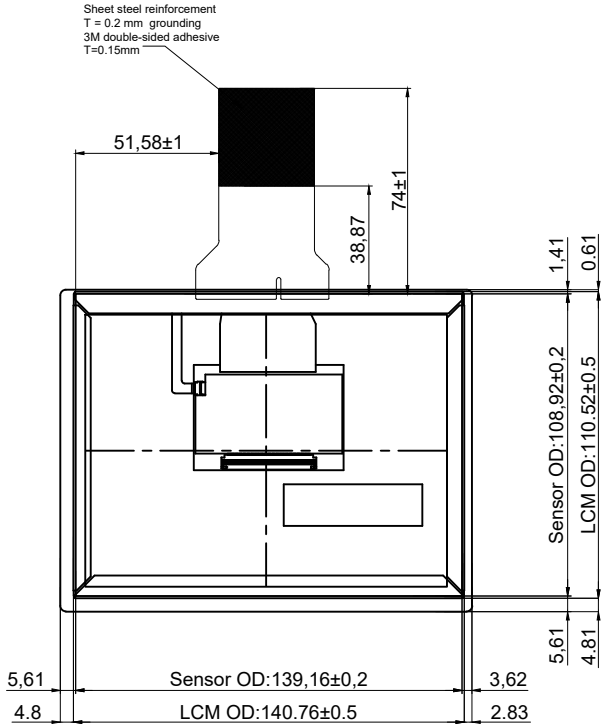

Technical Datasheet:

1. Structure：TP+LCM Optical Bonding
2. Cover Glass: T=2mm Tempered Glass
3. LCD Model No.: P0640XGF1MB00
4. Controller: BTP-TPM-CTR-ILI-064-SN04 COF
5. Controller IC: ILI2511 (Interface : USB)
6. Surface hardness ≥6H
7. Light transmittance：≥85%
8. Working Temperature: -20℃~+70℃，≤85%RH;
9. Storage Temperature: -30℃~+80℃，≤85%RH;
10. Unmarked Tolerance: ± 0.5 mm;
11. All material used conform to RoHS standards

Part No.	BTP-TPM-P0-6.4-ILI-SN04
Product Name： 6.4 inch Touch Display (TP+LCM Optical Bonding)	Drawing No. PM064260923SN04 Project Code. PM064SN04

Designed by:	Curry. Wang	Business Unit： SNT-BTP	Period Mark	View Angle	Ratio
Checked by:	Jimmy.Lu		A		1:1
Approved by:	Cale.Chen				
Workmanship:		BOM Code 2.03.064.01.0104	Page 1		Total 1 Page
Standardization:	Link.Chen	Product Series BTP-TPM	思诺泰科创电子（苏州）有限公司 SINOTECTRONICS INC.		
Released by:	Rocky.Liu				

E-File Name: PM064260923SN04

A3