
Ver.	Modify No.	Details	Area	P.I.C	Date


Front View

USB PIN DEFINITION	
Pin NO.	Definition
1	VCC_5V
2	D-
3	D+
4	GND


IIC PIN DEFINITION IOVDD:3.3V	
Pin NO.	Definition
1	VDD(3.3V)
2	SDA(3.3V)
3	SCL(3.3V)
4	GND
5	RESET(3.3V)
6	INT(3.3V)

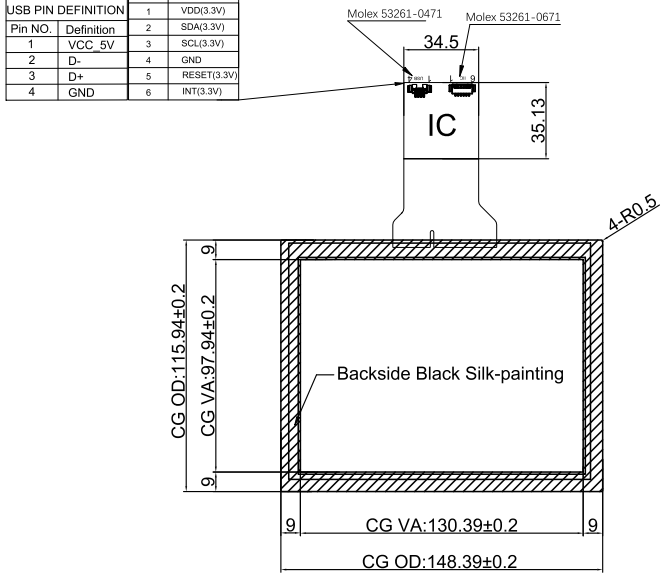

Side View

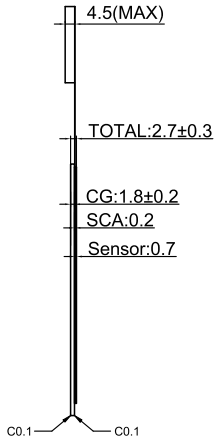

Back View

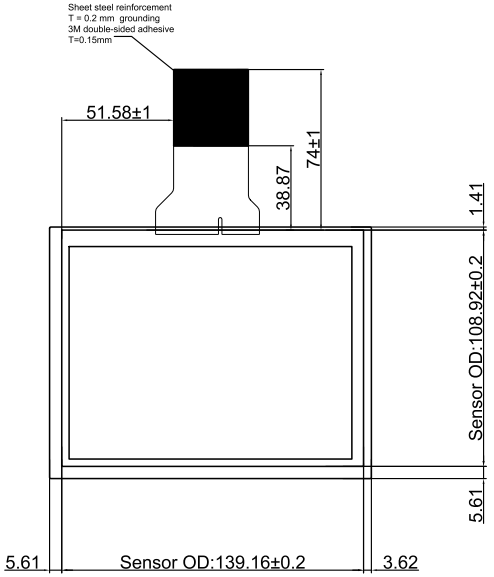

Technical Datasheet:

1. Structure：Cover Glass+SCA+ITO Glass
2. Controller: BTP-GG-CTR-ILI-064B-SN03 COF
3. Controller IC: ILI 2511
4. Cover Glass: T=1.8mm, Surface hardness ≥6H
5. Light transmittance：≥85%
6. Working Temperature: -20℃~+70℃，≤85%RH;
7. Storage Temperature: -20℃~+80℃，≤85%RH;
8. Unmarked Tolerance: ± 0.3 mm;
9. All material used conform to RoHS standards

Part No.	BTP-GG-TPB-6.4-ILI-SN03				
Product Name：6.4 inch Touch Panel		Drawing No.	G064260805SN03		
		Project Code.	G064SN03		
Designed by:	Curry. Wang	Business Unit：SNT-BTP	Period Mark	View Angle	Ratio
Checked by:	Jimmy.Lu		A		1:1
Approved by:	Cale.Chen				
Workmanship:	Jingmao.Ding	BOM Code 1.03.064.01.0103	Page 1	Total 1 Page	
Standardization:	Link.Chen	Product Series BTP-GG	思诺泰科创电子（苏州）有限公司 SINOTECTRONICS INC.		
Released by:	Rocky.Liu				

E-File Name: G064260805SN03

A3